



2026

Catalogue



Szerszám Kereskedőház Kft.
H-2330 Dunaharaszti, Templom u. 8.
Telefon: +36 1 260 30 30
www.uranusz.hu info@uranusz.hu
Szerszámban a mérce

MORE THAN

95

YEARS OF
HISTORY
IS JUST THE
BEGINNING

Everything started back in the 30's in a small village in the Basque Country of Northern Spain. We used to manufacture cart axles and mill balls for cement factories. Decade after decade, we forged our innovative heritage by launching tools such as the side nut adjustable wrench, often imitated over the years.

Today, we keep our commitment to continuous improvement adapting to the needs of professionals who appreciate their toolbox.



THE ORIGIN IS IMPORTANT DESTINY IS EVEN MORE



WE WANT TO BE WHERE YOU NEED US.
THUS, OUR PRESENCE IS WIDENING EVERYDAY.



VISIT OUR NEW WEBSITE

WWW.IRIMO.COM

- EVERYTHING YOU NEED TO KNOW FROM US
- SELF EXPLANATORY PICTURES
- COMPLETE INFORMATION ABOUT NEW PRODUCTS
- DOWNLOAD PDF OF EACH PRODUCT
- SOCIAL MEDIA FEED
- WHERE TO BUY

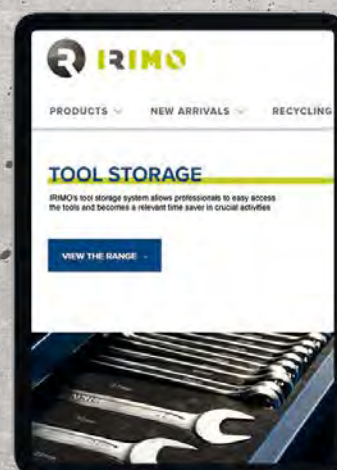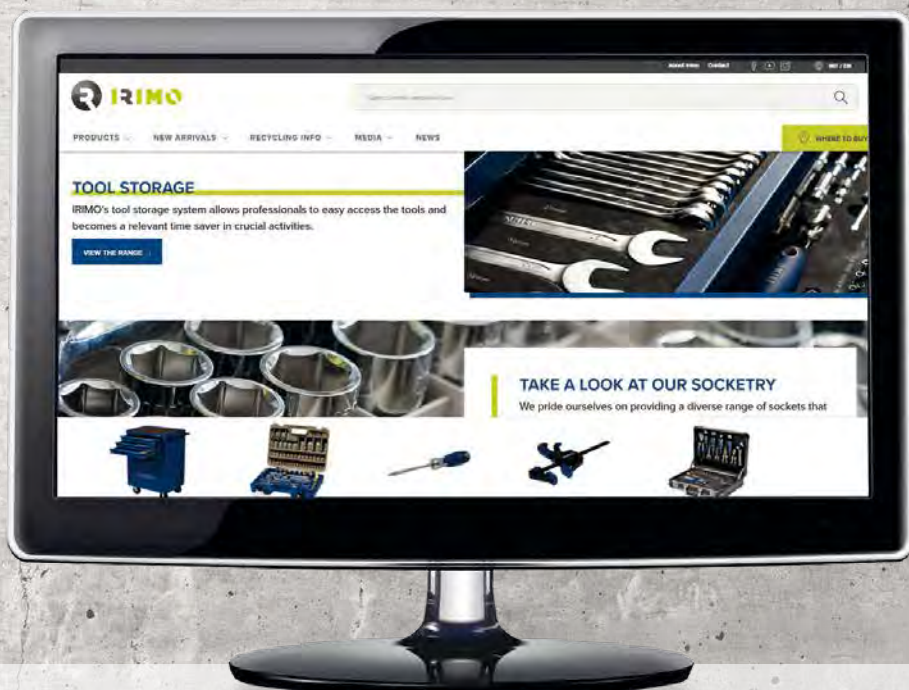

- ➔ INDEX 4 - 12
- ➔ ALPHANUMERICAL INDEX 200 - 213
- ➔ WARRANTY 219

TOOL INDEX

01. TOOL STORAGE

 13



02. WRENCHES

 37



04. SOCKETRY

 57



03. TORQUE TOOLS

 53



05. CLAMPING TOOLS

 91



06. PIPE TOOLS

 99



07. SCREWDRIVERS & BITS

 105



08. STRIKING TOOLS

 137



09. PLIERS - SCISSORS AND KNIVES

 149



10. PULLING TOOLS

 169



11. CUTTING TOOLS AND MEASURING

 175



12. LIGHTING AND POWER TOOLS

 189



**01. TOOL STORAGE****13-35**

TOOL TROLLEYS	14-19
5 DRAWER TOOL TROLLEY	14
6 DRAWER TOOL TROLLEY	14
7 DRAWER TOOL TROLLEY	14
4 DRAWER TOP CHEST	14
TROLLEY 6 DRAWERS WITH FOAM AND TOOLS	15-16
TROLLEY 7 DRAWERS WITH FOAM AND TOOLS	17
2 TRAYS ROLL CART	18
3 TOOL BOXES TOWER ON WHEELS	18
TOWER 3 IN 1 WITH FOAM AND TOOLS	19
TROLLEY FOAMS 3/3 SYSTEM	20-22
TROLLEY FOAMS 1/3 SYSTEM	22-25
WORKBENCH	26-28
HEAVY DUTY STEEL WORKBENCH WITH 4-LEG	26-27
FOLDABLE WORKBENCH	28
TRANSPORTERS	28-29
TRANSPORTER	28
FOLDABLE TRANSPORTER	29
METALLIC TOOL BOXES	29-30
TWO HANDLE MODEL	29
ALUMINIUM TOOL CASE WITH TOOLS	30
FABRIC BAGS	31-32
TOOL BAG WITH TUBULAR HANDLE	31
TOOL BAG WITH ZIP	31
LAPTOP AND TOOL BACK-PACK	32
BACK-PACK WITH WHEELS	32
POUCHES, BELTS AND FOLDERS	33-35
FOLDER – EMPTY	33
FOLDER, WITH TOOLS	33
HAMMER HOLDER	33
STRIKING SET	33
PLIER POUCH	34
ELECTRICIAN 4 PIECES SET IN POUCH	34
TOOL POUCH	34
MRO 7 PIECES SET IN POUCH	34
INSULATED 7 PIECES SET IN POUCH	34
10 POCKETS TOOL POUCH	35
MRO 9 PIECES SET IN POUCH	35
ADJUSTABLE BLET	35

02. WRENCHES**37-51**

ADJUSTABLE WRENCHES	38-40
HEAVY DUTY ADJUSTABLE WRENCH	39
CENTRAL NUT	39
PHOSPHATED ADJUSTABLE WRENCH SET	40
OPEN END WRENCHES	40-41
DOUBLE OPEN END WRENCHES	40
DOUBLE OPEN END WRENCH SETS	41
COMBINATION WRENCHES	42-43
COMBINATION WRENCHES IN MM	42
COMBINATION WRENCHES IN INCHES	43
COMBINATION WRENCH SETS	43
RATCHETING COMBINATION WRENCHES	44-46
RATCHETING COMBINATION WRENCHES	44
RATCHETING COMBINATION WRENCH SETS	44
STUBBY RATCHETING COMBINATION WRENCHES	45
STUBBY RATCHETING COMBINATION WRENCH SET	45
RATCHETING DOUBLE RING WRENCH SET	45
FLEX HEAD RATCHETING COMBINATION WRENCHES	45
FLEX HEAD RATCHETING COMBINATION WRENCH SETS	46
FLAT RING WRENCHES	46
DOUBLE RING END WRENCHES	46
DOUBLE RING END WRENCHES SETS	46
OFFSET RING WRENCHES	47
DOUBLE OFFSET RING WRENCHES	47
DOUBLE OFFSET RING WRENCH SETS	47
L-PIPE DOUBLE SOCKET WRENCHES	48
L-PIPE DOUBLE SOCKET WRENCHES	48
L-PIPE DOUBLE SOCKET WRENCH SETS	48
TUBULAR SOLID WRENCHES	49
DOUBLE HEAD SOCKET WRENCHES	49
DOUBLE HEAD SOCKET WRENCH SETS	49
BAR HANDLE FOR SOCKET WRENCH	49
SLOGGING RING, OPEN END	50
RING END SLOGGING WRENCH	50
OPEN END SLOGGING WRENCH	50
HOOK WRENCHES	51
HOOK WRENCH	51
HOOK WRENCH WITH INTERCHANGEABLE PIN	51
SPARE PART - INTERCHANGEABLE PIN	51

MULTIFITTING KEY	51
7 IN 1 UNIVERSAL KEY	51
9 IN 1 UNIVERSAL KEY	51

03. TORQUE TOOLS 53-55

TORQUE WRENCHES	54-55
ADJUSTABLE CLICK WRENCH WITH FIXED RATCHET HEADS	54
ADJUSTABLE CLICK WRENCH WITH INTERCHANGEABLE HEADS	54
9x12 MM OPEN END INSERTS	54
9x12 MM RING END INSERTS	54
9x12 & 14x18 MM RATCHET HEAD INSERTS	55
14x18 MM OPEN END INSERTS	55
14x18 MM RING END INSERTS	55

04. SOCKETRY 57-90

1/4" SOCKETS	58-64
1/4" HEXAGONAL SOCKETS	58
1/4" DEEP HEXAGONAL SOCKETS	58
1/4" TORX® SOCKETS	58
1/4" BIT DRIVERS	59
1/4" ACCESSORIES	60-62
1/4" SOCKET SETS	63-64
3/8" SOCKETS	64-67
3/8" HEXAGONAL SOCKETS	64
3/8" DEEP HEXAGONAL SOCKETS	65
3/8" ACCESSORIES	65-67
3/8" SOCKET SET	67
1/2" SOCKETS	68-78
1/2" HEXAGONAL SOCKETS	68
1/2" BIHEXAGONAL SOCKETS	68
1/2" HEXAGONAL DEEP SOCKETS	69
1/2" BIHEXAGONAL DEEP SOCKETS	69
1/2" TORX® SOCKETS	69
1/2" BIT DRIVERS	70-71
1/2" ACCESSORIES	71-73
1/2" SOCKET SETS	74-78
3/4" SOCKETS	79-81
3/4" HEXAGONAL SOCKETS	79
3/4" BIHEXAGONAL SOCKETS	79

3/4" ACCESSORIES	80
3/4" SOCKET SETS	81
3/8" IMPACT SOCKETS	82-83
3/8" IMPACT HEXAGONAL SOCKETS, METRIC	82
3/8" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC	82
3/8" IMPACT ACCESSORIES	83
1/2" IMPACT SOCKETS	84-86
1/2" IMPACT HEXAGONAL SOCKETS, METRIC	84
1/2" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC	84
1/2" IMPACT SOCKET SET	84-85
1/2" IMPACT ACCESSORIES	86
3/4" IMPACT SOCKETS	87-88
3/4" IMPACT HEXAGONAL SOCKETS, METRIC	87
3/4" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC	87
3/4" IMPACT SOCKET SET	87
3/4" IMPACT ACCESSORIES	88
1" IMPACT SOCKETS	89-90
1" IMPACT HEXAGONAL SOCKETS, METRIC	89
1" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC	89
1" IMPACT SOCKET SET	89
1" IMPACT ACCESSORIES	90

05. CLAMPING TOOLS 91-97

BENCH VICES	92-95
ROUND GUIDE VICE	92
SQUARE GUIDE VICE	92-93
SPARE PARTS FOR BENCH VICES	93-94
ACCESSORIES FOR BENCH VICES	94-95
TABLE VICE	95
SCREW CLAMPS	96-97
FORGED WOODEN HANDLE F-CLAMP	96
STEEL CLAMP, 90 MM	96
STEEL T-HANDLE CLAMP, 120 MM	96
NON-SLIP BRAKING MECHANISM CLAMP, 150 MM	96
LIGHT SCREW CLAMP, 70 MM	96
FORGED RATCHETING F-CLAMP	97
QUICK CLAMPS	97

**06. PIPE TOOLS****99-103**

STILLSON WRENCHES	100
STILLSON WRENCH	100
ALUMINIUM WRENCH	100
CHAIN PIPE WRENCH	101
CHAIN PIPE WRENCH	101
SPARE CHAIN	101
PIPE WRENCHES SWEDISH MODEL	101
CORNER MOUTH	101
PERPENDICULAR MOUTH	101
CURVED MOUTH	101
PIPE CUTTERS	102
SMALL COPPER PIPE CUTTER	102
MULTIPURPOSE PIPE CUTTER	102
TELESCOPIC COPPER PIPE CUTTER	102
STEEL PIPE CUTTER	102
SPARE WHEELS	102
AUTO RETRACT PLASTIC TUBE CUTTER	102
SPARE BLADE	102
GASKET CUTTERS	103
GASKET CUTTERS SETS	103
GASKET CUTTERS	103
WAD PUNCHES 3 - 30 HANDLE	103
REVOLVER WAD PUNCHES	103

07. SCREWDRIVERS & BITS**105-136**

SCREWDRIVERS	106-109
SLOTTED SCREWDRIVERS FOR ENGINEERINGS	106
SLOTTED SCREWDRIVERS FOR ELECTRICIANS	106
STUBBY SLOTTED SCREWDRIVERS	107
PHILLIPS SCREWDRIVERS	107
STUBBY PHILLIPS SCREWDRIVERS	107
POZIDRIV SCREWDRIVERS	107
STUBBY POZIDRIV SCREWDRIVERS	107
TORX® SCREWDRIVERS	108
NUT DRIVER WITH HANDLE 1/4"	108
MAGNETIC BIT HOLDER FOR 1/4" BITS	108
NUT DRIVER WITH HANDLE, WITH FLEXIBLE BLADE 1/4"	109

RATCHETING BIT HOLDER FOR 1/4" BITS	109
RATCHETING BIT HOLDER SCREWDRIVER FOR 1/4" BITS	109
RATCHETING BIT HOLDER STUBBY FOR 1/4" BITS	109
INSULATED 1000V SCREWDRIVERS	110-111
SLOTTED INSULATED 1000V SCREWDRIVERS	110
PHILLIPS INSULATED 1000V SCREWDRIVERS	110
POZIDRIV INSULATED 1000V SCREWDRIVERS	111
TORX® INSULATED 1000V SCREWDRIVERS	111
TWIN PACK INSULATED SCREWDRIVERS + TESTER	111
INSULATED SCREWDRIVER SET	111
SCREWDRIVER SETS	112-113
T-HANDLE SCREWDRIVERS	113-114
T-HANDLE WITH HEXAGONAL TIP	113
T-HANDLE WITH TORX® TIP	114
T-HANDLE WITH HEXAGONAL BALL TIP	114
T-HANDLE SCREWDRIVERS, NUT DRIVER	114
HEX BALL END T HANDLE SET	114
6 IN 1 SCREWDRIVER	115
REVERSIBLE SCREWDRIVER	115
MAGNETISER	115
PRECISION SCREWDRIVER	116
PRECISION SCREWDRIVER SET	116
POCKET PRECISION SCREWDRIVER	116
VOLTAGE TESTER	116
NICKEL PLATED KEYS FOR HEX SCREWS	117-118
NICKEL PLATED KEYS, METRIC	117
NICKEL PLATED KEYS, INCHES	117
NICKEL PLATED KEYS SETS	117
OFFSET SCREWDRIVER SET	118
CHROME PLATED KEYS FOR HEX SCREWS, LONG	118
BLACK KEYS FOR HEX SCREWS	118-120
BLACK KEYS, METRIC	118-119
BLACK KEYS SETS	119
BLACK KEYS, INCHES	120
BLACK KEYS SETS	120
BLACK KEYS FOR HEX SCREWS, LONG	120-121
BLACK KEYS, METRIC LONG	120
LONG BALL END, METRIC	121
BLACK KEYS SETS	121

BLACK KEYS FOR TORX® SCREWS	122
BLACK KEYS FOR TORX® SCREWS	122
BLACK KEY SETS FOR TORX® SCREWS	122
BLACK KEYS FOR TORX® TAMPER RESISTANT SCREWS	123
BLACK KEYS FOR TORX® TAMPER RESISTANT SCREWS	123
BLACK KEY SETS FOR TORX® TAMPER RESISTANT SCREWS	123
1/4" BITS	124-130
1/4" BITS FOR SLOTTED SCREWS	124
1/4" BITS FOR PHILLIPS SCREWS	124-125
1/4" BITS FOR PHILLIPS DRY WALL SCREWS	125
1/4" BITS FOR POZIDRIV SCREWS	125-126
1/4" BITS FOR TORX® SCREWS	126-127
1/4" BITS FOR TORX® TAMPER SCREWS	127
1/4" BITS FOR HEXAGONAL SCREWS	127
TORSION BIT FOR PHILLIPS HEAD SCREWS	128
TORSION BIT FOR POZIDRIV HEAD SCREWS	128
DIAMOND BIT FOR PHILLIPS HEAD SCREWS	128
DIAMOND BIT FOR POZIDRIV HEAD SCREWS	128
1/4" POWER MAGNETIC NUT DRIVER	129
1/4" POWER MAGNETIC NUT DRIVER SET	129
1/4" POWER MAGNETIC NUT DRIVER WITH RETAINING RING	129
ADAPTOR 1/4"	130
UNIVERSAL HOLDER 1/4"	130
QUICK RELEASE BIT HOLDER 1/4"	130
1/4" BITS SETS	131-132
PRECISION SCREWDRIVER SET FOR PRECISION ENGINEERING AND ELECTRONICS APPLICATIONS	132
5/16" BITS	133
5/16" BITS FOR SLOTTED SCREWS	133
5/16" BITS FOR PHILLIPS SCREWS	133
5/16" BITS FOR HEXAGONAL SCREWS	133
5/16" BITS FOR TORX® SCREWS	133
5/16" IMPACT SCREWDRIVER	134
5/16" IMPACT SCREWDRIVER	134
5/16" IMPACT SCREWDRIVER ADAPTOR	134
5/16" IMPACT DRIVER BIT SET	134
10 MM BITS	135-136
10 MM BITS FOR HEXAGONAL SCREWS	135
10 MM BITS FOR TORX® SCREWS	135

1/2" ADAPTOR FOR 10 MM BITS	135
3/8" ADAPTOR FOR 10 MM BITS	135
10 MM BITS FOR TORX® TAMPER SCREWS	136
10 MM BITS FOR XZN SCREWS	136
10 MM SQUARE BITS	136
1/2" SOCKET DRIVERS	136
1/2" SOCKET DRIVERS FOR TORX® TAMPER SCREWS	136

08. STRIKING TOOLS **137-148**

PUNCHES AND CHISELS	138-141
COLD CHISELS	138
FLAT COLD CHISELS	138
EXTRAFLAT COLD CHISEL	138
FLAT CAPE CHISELS	138
ROUND CENTRE PUNCHES	139
ROUND CENTRE PUNCH SETS	139
ROUND TAPER PUNCHES	139
OCTAGONAL TAPER PUNCHES	139
ROUND TAPER PUNCH SET	140
OCTAGONAL TAPER PUNCH SET	140
ROUND PARALLEL PIN PUNCHES	140
ROUND PARALLEL PIN PUNCH SET	140
OCTAGONAL PARALLEL PIN PUNCHES	141
ROUND PARALLEL PIN PUNCHES, LONG SERIES	141
OCTAGONAL PARALLEL PIN PUNCHES, LONG SERIES	141
ROUND PARALLEL PIN PUNCH SET, LONG SERIES	141
ELECTRICIAN'S COLD CHISELS	141
ENGINEERS SCRIBERS	142
WRECKING BARS	142
HAMMERS	143-147
CURVED CLAW HAMMERS	143
STUBBY CLAW HAMMERS	143
CLAW HAMMER SPANISH TYPE	143
JOINER'S HAMMERS	144
GERMAN DIN HAMMERS	144
RIVOIR HAMMERS	145
BALL PEIN HAMMERS	145



SPANISH TYPE SHOVEL-PICKS	146
SPANISH STONING HAMMERS	146
STONING HAMMERS	146
BLACK RUBBER MALLET	146
ANTI-BOUNCE NYLON FACED HAMMER	147
NYLON FACED HAMMERS	147
CHISELS	148
CHISEL SETS	148
WOOD CARVING SET	148
09. PLIERS – SCISSORS AND KNIVES	149-167
PLIERS	150-154
COMBINATION PLIERS	150
SIDE CUTTING PLIERS	151
SNIPE NOSE PLIERS	151
SNIPE NOSE PLIERS BENT TIP	151
FLAT NOSE PLIERS	151
ROUND NOSE PLIERS	152
SLIP JOINT PLIERS	152
QUICK ADJUST SLIP JOINT PLIERS	152
PLIERS SETS	152
MINI PLIERS	153-154
PLIERS FOR ELECTRICIANS	154-156
STRIPPING PLIERS	154
COPPER ALUMINIUM WIRE CUTTER	154
CRIMPING PLIER INSULATED TERMINALS	155
CRIMPING PLIER NON-INSULATED TERMINALS	155
CRIMPING PLIER NON-INSULATED FASTON TYPE TERMINALS	155
CRIMPING PLIER INSULATED TERMINALS SET	155
INSULATED END SLEEVES AND PLUG CONNECTORS SET	156
INTERCHANGEABLE JAWS CRIMPING PLIERS SET	156
INSULATED PLIERS	156-158
INSULATED COMBINATION PLIERS	156
INSULATED FLAT NOSE PLIER	156
INSULATED SNIPE NOSE PLIERS	157
INSULATED SNIPE NOSE PLIERS BENT TIP	157

INSULATED SIDE CUTTING PLIERS	157
INSULATED HEAVY DUTY SIDE CUTTING PLIERS	157
INSULATED STRIPPING PLIERS	158
INSULATED SLIP JOINT PLIERS	158
INSULATED PLIERS SET	158
PINCERS AND FENCING PLIERS	159
CARPENTER'S PINCERS	159
FENCING PLIERS	159
FENCING PLIERS WITH PVC DIPPED HANDLES	159
BOLT CUTTERS	159
BOLT CUTTERS	159
SPARE HEAD	159
CIRCLIP PLIERS	160
INTERNAL STRAIGHT	160
INTERNAL BENT	160
EXTERNAL STRAIGHT	160
EXTERNAL BENT	160
CIRCLIP SET	160
LOCKING PLIERS	161-163
UNIVERSAL, CURVED JAWS WITH WIRE CUTTER	161
UNIVERSAL, STRAIGHT JAWS	161
LONG NOSE	161
WELDING	161
STEEL CLAMP	161
STEEL CLAMP, SWIVEL PADS	162
STEEL CLAMP, SWIVEL PADS, SLIM	162
TABLE C CLAMP	162
4 POSITION PLIERS	162
CURVED JAWS WITH CUTTER	163
SOFT GRIP PLIERS SET	163
AUTOMATIC HAND VICES	163
RIVETING TOOLS	164
HAND RIVETER	164
2 ARM RIVETER	164
NUT RIVETER	164
HAND RIVETER SET WITH RIVETS	164
ELECTRICIAN'S SCISSORS AND KNIVES	165-167
9 MM SNAP OFF KNIFE	165
18 MM SNAP OFF KNIFE	165
SAFETY UTILITY KNIFE	165

GLASS SCRAPER WITH INTERCHANGEABLE BLADES	165
MULTIPURPOSE TRADESMAN KNIVES WITH SHEATH	165
FOLDABLE KNIFE	166
ELECTRICIANS' KNIFE	166
MULTITOOL	166
ELECTRICIANS' SCISSORS	167
HOOKS AND PICKING TOOLS	167
MINI PICK AND HOOK SET	167

10. PULLING TOOLS 169-174

PULLERS	170-171
UNIVERSAL 2 ARM PULLERS	170
SELF-CENTERING 2 ARMS PULLERS	170
SELF-CENTERING 3 ARMS PULLERS	171
MULTIPLE PULLERS	171
EXTRACTORS	172
STUD EXTRACTORS SET	172
TAP WRENCH	172
NUT SPLITTER	172
PICK-UP TOOLS	172-173
MAGNETIC PICK-UP TOOL	172
CLAW PICK-UP TOOL	173
PRY BARS	173
PRY BAR	173
OFFSET LEVER SET	173
OFFSET LEVER	173
SHEET PUNCHES	174
SHEET METAL PUNCHES	174
SPARE BOLT	174

11. CUTTING TOOLS AND MEASURING 175-188

BOWSAW FRAMES AND BLADES	176
BOWSAW FRAMES	176
BOWSAW BLADES, GREEN WOOD	176
BOWSAW BLADES, DRY WOOD	176

HACKSAW FRAMES AND BLADES	176-178
TENON SAW	176
GENERAL PURPOSE HANDSAW	176
DOVETAIL FLEX HANDSAW	177
COMPASS SAW	177
ALUMINIUM HACKSAW FRAME	177
HACKSAW FRAME	177
BI-METAL	177
ALUMINIUM HOLDER	178
HACKSAW FRAME	178
HOLESAWS	178
FILES	178-179
FLAT FILES	178
HAND FILES	178
HALF ROUND FILES	179
ROUND FILES	179
THREE SQUARE FILES	179
SQUARE FILES	179
FILE SET	179
SPIRIT LEVELS	180-181
SPIRIT LEVELS	180
MAGNETIC SPIRIT LEVELS	180
SET OF LEVELS	181
TORPEDO LEVEL	181
POCKET SPIRIT LEVEL	181
ALUMINUM LEVEL WITH HOLSTER	181
MEASURING TAPES	182-183
MEASURING TAPES	182
TAPE TWINPACK	182
HIGH VISIBILITY MEASURING TAPES	182
MEASURING TAPE FOR VERTICAL MEASUREMENTS	183
LONG TAPES	183
WOODEN FOLDING RULE	183
SQUARES	184
SQUARES	184
COMBINATION SQUARES	184
GAUGE SETS	184
SCREW PITCH GAUGE SET	184
FEELER GAUGE SETS	184



CALIPERS	185
VERNIER CALIPER 150 MM	185
DIGITAL VERNIER CALIPER 150 MM	185
INFRARED THERMOMETER	185
PAINT SCRAPERS	186
PAINT SCRAPERS	186
BODY WORK SCRAPER SET	186
FASTENING TOOLS	186-188
CAULKING GUNS	186
ELECTRONIC GLUE GUN SET	186
HEAT GUN 2000W	187
HEAT GUN NOZZLES	187
HEAVY DUTY STAPLE GUN 4 IN 1	187-188
HAMMER TACKER	187-188
HEAVY DUTY STAPLES	188
LIGHT DUTY STAPLES	188
BRAD NAILS 15 MM	188
CABLE STAPLES	188
 12. LIGHTING AND POWER TOOLS	 189-194
POCKET LAMPS	190-191
FLEXIBLE LIGHT	190
COMPACT LIGHT	190
SLIM FLEX	190
MINI FLEXIBLE LIGHT	191
INSPECTION LAMPS	191
ALUMINIUM TORCH	191
WORKING LAMPS	191
BOOK LIGHT	191
HEAD LAMPS	192
HEAD LIGHT	192
PNEUMATIC TOOLS	193-194
1/2" IMPACT WRENCH	193
3/4" IMPACT WRENCH	193
1/4" RATCHET	194
1/2" RATCHET	194
AIR LINE COUPLERS	194
CORDLESS SCREWDRIVER	194
3.6V CORDLESS SCREWDRIVER	194

POINT OF SALE MATERIAL	196-199
METAL WALL 1 SIDE 2 LEGS	197
LIGHTBOX	197
SIGN CARRIER + SIGN IRIMO	197
METAL WALL CORNER 1 LEG	197
LIGHTBOX CORNER WALL	198
DOUBLE SIDE WALL WITH WHEELS	198
TRIANGULAR METAL WALL WITH WHEELS	198
SPARE PARTS FOR METAL WALL	198
METHACRYLATE FOR LIGHTBOX	198
PVC TOP SIGN FOR SIGN CARRIER	198
TOP SIGN FOR DOUBLE SIDED WALL	198
BANNER FOR METAL WALLS	198
ADDITIONAL POS MATERIAL.	
EMPTY DISPLAYS	199
GENERIC COUNTER DISPLAY	199
COUNTER S DISPLAY	199
COUNTER L DISPLAY	199
PALLET COVER EUROPALLET	199
COUNTER DISPLAY FOR PLIERS	199
STICKERS A4 SHEET	199
STAND ALONE	199

01.

TOOL STORAGE



Built to be filled

26" capacity

With a double wall frame, it protects your tools from shocks and crashes, while reinforced areas handle stress at critical points.

x4

x5

x6

x7

DRAWERS



Enjoy Durability

Protection & Convenience in your workspace

Easy Mobility

Heavy-duty wheels (125x30 mm) with ball bearings and non-marking rubber glide smoothly. Two fixed wheels provide stability, whilst two swiveled with brakes offer precision control.

Smooth and Steady

Long ball bearing slides ensure 100% drawer opening. Click/detent system keeps drawers securely closed. Central lock adds extra security.



9066K-01 • (2x) slides




9066K-05 • handle



9066K-06 • top matt

9066K-02 • (2x) swivel
9066K-03 • (2x) fixed

9066K5	x5	1	677x501x954	400	543x445xh	25	125x30	48
9066K6	x6	1	677x501x954	400	543x445xh	25	125x30	51
9066K7	x7	1	677x501x954	400	543x445xh	25	125x30	52
9065K4	x4	1	677x501x420	250	543x445xh	25	—	38



9066K6FF100

TROLLEY 6 DRAWERS WITH FOAM AND TOOLS

THE FOAMS

x 206



IFF1A001



IFF1A002



IFF1A003

9066K6FF100	1	677 x 501 x 954	80

IFF1A001

045001, 045011, 045021

101-04-1, 101-045-1, 101-05-1, 101-055-1,
101-06-1, 101-07-1, 101-08-1, 101-09-1,
101-10-1, 101-11-1, 101-12-1, 101-13-1,
101-14-1103-04-1, 103-05-1, 103-06-1, 103-07-1,
103-08-1, 103-09-1, 103-10-1, 103-11-1,
103-12-1, 103-13-1

105-22-1, 105-24-1

105-40-1

105-42-1

105-48-1

105-50-1

105-70-1

106-04-1, 106-05-1, 106-06-1, 106-07-1,
106-08-1121-10-1, 121-11-1, 121-12-1, 121-13-1,
121-14-1, 121-15-1, 121-16-1, 121-17-1,
121-18-1, 121-19-1, 121-20-1, 121-21-1,
121-22-1, 121-24-1, 121-27-1, 121-30-1,
121-32-1

125-23-1, 125-25-1

125-40-1

125-42-1

125-48-1

125-53-1, 125-54-1

124-14-1, 124-15-1, 124-17-1, 124-19-1,
124-22-1

125-70-1

126-10-1, 126-11-1, 126-12-1, 126-14-1,
126-16-1, 126-18-1, 126-20-1, 126-24-1

475-4-1, 475-5.5-1, 475-6.5-1

475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1

475-PH1-1, 475-PH2-1

475-PZ1-1, 475-PZ2-1

475-T8-1, 475-T10-1, 475-T15-1,
475-T20-1, 475-T25-1, 475-T27-1,
475-T30-1

IFF1A002

529171

475-61-1

48-9-H

511-105-1

515-002-1, 515-003-1, 515-004-1,
515-005-1, 515-006-1

5-250C-1

527-61-2

601-180-1

612-160-1

625-180-1

634-250-1

666-156-1

980-3B-1

IFF1A003

25-06-2, 25-07-2, 25-08-2,
25-09-2, 25-10-2, 25-11-2,
25-12-2, 25-13-2, 25-14-2,
25-15-2, 25-16-2, 25-17-2,
25-18-2, 25-19-2, 25-21-2,
25-22-2, 25-24-2, 25-27-2,
25-30-2, 25-32-2407-4-100, 407-5.5-125,
407-6.5-150, 407-8-175409-1-100, 409-2-125,
409-3-150

9066K6

2



3



4



5



6



7



8



9



10



11



12



9066K6FF101

TROLLEY 6 DRAWERS WITH FOAM AND TOOLS



x 178

THE FOAMS



IFF1A004




IFF1A005



IFF1A006

9066K6FF101	1	677x501x950		80	
IFF1A004		IFF1A005		IFF1A006	
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1		529171		25-06-2, 25-07-2, 25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-15-2, 25-16-2, 25-17-2, 25-18-2, 25-19-2, 25-21-2, 25-22-2, 25-24-2, 25-27-2, 25-30-2, 25-32-2	
103-04-1, 103-05-1, 103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1, 103-11-1, 103-12-1, 103-13-1		527-61-2		10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1, 10-2123-1, 10-2427-1, 10-3032-1	
105-22-1, 105-24-1		475-61-1		9066K6	
105-40-1		48-9-H			
105-42-1		501-250-1			
105-48-1		511-105-1			
105-50-1		515-002-1, 515-003-1, 515-004-1, 515-005-1, 515-006-1			
105-70-1		5-150C-1, 5-250C-1			
121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-17-1, 121-19-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1		601-180-1			
125-23-1, 125-25-1		612-160-1			
125-40-1		625-180-1			
125-42-1		634-250-1			
125-48-1		665-200-1			
125-54-1		980-3B-1			
125-70-1					
407-4-100, 407-5-5-125, 407-6-5-150, 407-8-175					
408-6-5-25					
409-1-100, 409-2-125, 409-3-150					
409-2-25					
413-1-100, 413-2-125					



9066K7FF102

TROLLEY 7 DRAWERS WITH FOAM AND TOOLS



x 222

THE FOAMS



IFF1A004



IFF1A005



IFF1A006



IFF1A007

9066K7FF102	1	677x501x954	90
IFF1A004			
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1			
103-04-1, 103-05-1, 103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1, 103-11-1, 103-12-1, 103-13-1			
105-22-1, 105-24-1			
105-40-1			
105-42-1			
105-48-1			
105-50-1			
105-70-1			
121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-17-1, 121-19-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1			
125-23-1, 125-25-1			
125-40-1			
125-42-1			
125-48-1			
125-54-1			
125-70-1			
407-4-100, 407-5-5-125, 407-6-5-150, 407-8-175			
408-6-5-25			
409-1-100, 409-2-125, 409-3-150			
409-2-25			
413-1-100, 413-2-125			
IFF1A005			
529171			
527-61-2			
475-61-1			
48-9-H			
501-250-1			
511-105-1			
515-002-1, 515-003-1, 515-004-1, 515-005-1, 515-006-1			
5-150C-1, 5-250C-1			
601-180-1			
612-160-1			
625-180-1			
634-250-1			
665-200-1			
980-3B-1			
IFF1A006			
25-06-2, 25-07-2, 25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-15-2, 25-16-2, 25-17-2, 25-18-2, 25-19-2, 25-21-2, 25-22-2, 25-24-2, 25-27-2, 25-30-2, 25-32-2			
10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1, 10-2123-1, 10-2427-1, 10-3032-1			
IFF1A007			
534261			
534291			
534321			
534351			
534381			
534411			
180-05-1, 180-06-1, 180-07-1, 180-08-1, 180-10-1, 180-12-1, 180-14-1, 180-17-1			
180-05X-1, 180-06X-1, 180-07X-1, 180-08X-1, 180-10X-1, 180-12X-1			
183-30-1, 183-40-1, 183-45-1, 183-50-1, 183-55-1, 183-60-1			
183-40X-1, 183-45X-1, 183-50X-1, 183-55X-1			
458-8-F			
716-M6-1, 716-M8-1, 716-M11-1, 716-M14-1, 716-M18-1			
801-145-1			
9066K7			

TOOL TROLLEYS

2 TRAYS ROLL CART



9064K-02



9064K-02T

- 2 tray set roll cart
- Manufactured and designed for easy and quick assembly
- Wheels of 100x25 mm with ball bearings and non-marking TPR outsurface:
2 fixed and 2 swivel with brake
- Trays internal dimensions:
(2x) 750x425x77 mm


9064K-02	1		759x432x1.025	300	759x432xh	50	25x100	19
9064K-02T	1				757x425x77	50		3.25

3 TOOL BOXES TOWER ON WHEELS



- Multiple compartments provide large storage capacity allowing easy organization of tools
- Combination of steel and PP plastic provides robustness but light
- On wheels solution, together with the telescopic handle, makes its driving easy even when very loaded
- Rubber wheels dim: 125x35 mm
- Locking bar with padlock for full locking included
- The 3 compartments can be attached and detached easily with the lateral metallic latches
- **Top compartment:**
int dim: 485x225x210 mm
Can be used as an independent tool box and it can be locked using a padlock
Alu big handle makes its transport easy and comfortable
Retractable side handles help to lift when very loaded
Portable tray included 450x185x45 mm
- **Medium compartment:**
int dim of 2 drawers: 390x215x60 mm
2 Drawers with ball bearing sliders and full extension, also padlockable
- **Bottom compartment:**
int dim: 403x200x265 mm
Drawer pivots giving full access and making the storage hose reels, drills and similar big tools/ accessories easy
- Telescopic handle is permanently attached to the bottom compartment and has 4 positions:
995 mm, 900 mm, 800 mm and 645 mm
- External dim: 520x320x720 mm

9021FTW520	1		520x320x720	15



3 in 1

9021FTW520FF1

Tower 3 in 1 with foam and tools.

Heavy-duty wheels (125x30 mm) with ball bearings and non-marking rubber glide smoothly.

Two fixed wheels provide stability, whilst two swiveled with brakes offer precision control.




520 x 320 x 720



1



22.5



x 98

101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1,
101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1

1/4"



121-08-1, 121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1,
121-17-1, 121-19-1, 121-21-1, 121-22-1

1/2"



105-70-1




475-1/4-125



105-40-1




105-50-1



105-22-1




105-24-1



105-42-1




125-70-1




125-40-1



125-43-1



125-23-1



125-25-1



46-8-F




475-32-1



980-3B-1



407-5.5-125




409-1-100




407-6.5-150



409-2-125



612-160-1




601-180-1



625-180-1



604-160-1



5-250C-1




522-31-2




634-250-1




665-200-1



25-08-1, 25-09-1, 25-10-1, 25-11-1, 25-12-1, 25-13-1, 25-14-1,
25-17-1, 25-19-1



9021FTW520



TROLLEY FOAMS 3/3 SYSTEM

IFF1A001



- 3/3 Foam Inlay Socket sets / ratchet/bits
- 94 pieces

IFF1A001	1	445x543x40
045001, 045011, 045021		
101-04-1, 101-04-5-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1		
103-04-1, 103-05-1, 103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1, 103-11-1, 103-12-1, 103-13-1		
105-22-1, 105-24-1		
105-40-1		
105-42-1		
105-48-1		
105-50-1		
105-70-1		
106-04-1, 106-05-1, 106-06-1, 106-07-1, 106-08-1		
121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-16-1, 121-17-1, 121-18-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1		
125-23-1, 125-25-1		
125-40-1		
125-42-1		
125-48-1		
125-53-1, 125-54-1		
124-14-1, 124-15-1, 124-17-1, 124-19-1, 124-22-1		
125-70-1		
126-10-1, 126-11-1, 126-12-1, 126-14-1, 126-16-1, 126-18-1, 126-20-1, 126-24-1		
475-4-1, 475-5-5-1, 475-6-5-1		
475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1		
475-PH1-1, 475-PH2-1		
475-PZ1-1, 475-PZ2-1		
475-T8-1, 475-T10-1, 475-T15-1, 475-T20-1, 475-T25-1, 475-T27-1, 475-T30-1		


IFF1A002



- 3/3 Foam Inlay Striking tools / Cutting tools / Measuring tape / Pliers
- 85 pieces


IFF1A002	1	445x543x40
529171		
475-61-1		
48-9-H		
511-105-1		
515-002-1, 515-003-1, 515-004-1, 515-005-1, 515-006-1		
5-250C-1		
527-61-2		
601-180-1		
612-160-1		
625-180-1		
634-250-1		
666-156-1		
980-3B-1		

IFF1A003

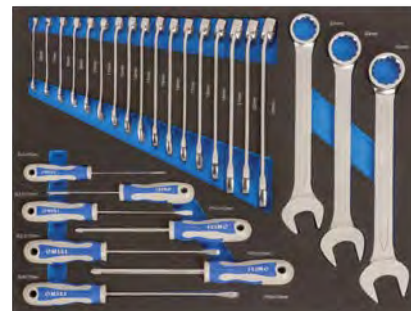

- 3/3 Foam Inlay Combination wrenches / Screwdrivers
- 27 pieces

IFF1A003	1	445x543x40
25-06-2, 25-07-2, 25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-15-2, 25-16-2, 25-17-2, 25-18-2, 25-19-2, 25-21-2, 25-22-2, 25-24-2, 25-27-2, 25-30-2, 25-32-2		
407-4-100, 407-5-5-125, 407-6-5-150, 407-8-175		
409-1-100, 409-2-125, 409-3-150		



IFF1A004



- 3/3 Foam Inlay Socket set/Screwdrivers/Ratchets
- 60 pieces

Q		
IFF1A004	1	445x543x40

101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1		
103-04-1, 103-05-1, 103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1, 103-11-1, 103-12-1, 103-13-1		
105-22-1, 105-24-1		
105-40-1		
105-42-1		
105-48-1		
105-50-1		
105-70-1		
121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-17-1, 121-19-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1		
125-23-1, 125-25-1		
125-40-1		
125-42-1		
125-48-1		
125-54-1		
125-70-1		
407-4-100, 407-5-5-125, 407-6-5-150, 407-8-175		
408-6-5-25		
409-1-100, 409-2-125, 409-3-150		
409-2-25		
413-1-100, 413-2-125		

IFF1A005



- 3/3 Foam Inlay Striking tools/Cutting tools/Pliers
- 87 pieces

Q		
IFF1A005	1	445x543x40

529171		
527-61-2		
475-61-1		
48-9-H		
501-250-1		
511-105-1		
515-002-1, 515-003-1, 515-004-1, 515-005-1, 515-006-1		
5-150C-1, 5-250C-1		
601-180-1		
612-160-1		
625-180-1		
634-250-1		
665-200-1		
980-3B-1		

IFF1A006



- 3/3 Foam Inlay Combination wrenches/Open end wrenches
- 31 pieces

Q		
IFF1A006	1	445x543x40

25-06-2, 25-07-2, 25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-15-2, 25-16-2, 25-17-2, 25-18-2, 25-19-2, 25-21-2, 25-22-2, 25-24-2, 25-27-2, 25-30-2, 25-32-2		
10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1, 10-2123-1, 10-2427-1, 10-3032-1		

2



3



4



5



6



7



8



9



10



11



12



TROLLEY FOAMS 3/3 SYSTEM

IFF1A007



- 3/3 Foam Inlay Socket set/Files/Cutting tools
- 44 pieces



IFF1A007 1 445x543x40

534261		
534291		
534321		
534351		
534381		
534411		
180-05-1, 180-06-1, 180-07-1, 180-08-1, 180-10-1, 180-12-1, 180-14-1, 180-17-1		
180-05X-1, 180-06X-1, 180-07X-1, 180-08X-1, 180-10X-1, 180-12X-1		
183-30-1, 183-40-1, 183-45-1, 183-50-1, 183-55-1, 183-60-1		
183-40X-1, 183-45X-1, 183-50X-1, 183-55X-1		
458-8-F		
716-M6-1, 716-M8-1, 716-M11-1, 716-M14-1, 716-M18-1,		
801-145-1		

IFF1E001



- Double offset ring wrenches
- 8 pieces



IFF1E001 1 445x181x40

15-0607-1, 15-0809-1, 15-1011-1, 15-1213-1, 15-1415-1, 15-1617-1, 15-1819-1, 15-2022-1



IFF1E002



- Ratcheting combination wrenches
- 8 pieces



IFF1E002 1 445x181x40

18-08-1, 18-10-1, 18-11-1, 18-12-1, 18-13-1, 18-14-1, 18-17-1, 18-19-1



IFF1E003




- Double open end wrenches
- 10 pieces



IFF1E003 1 445x181x40

10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1, 10-2427-1, 10-3032-1



IFF1E004




- Combination wrenches
- 16 pieces



IFF1E004 1 445x181x40

25-06-2, 25-07-2, 25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-15-2, 25-16-2, 25-17-2, 25-18-2, 25-19-2, 25-21-2, 25-22-2



IFF1E005




- Open pipe socket wrench, Hex
- 11 pieces



IFF1E005 1 445x181x40

52-08-1, 52-10-1, 52-11-1, 52-12-1, 52-13-1, 52-14-1, 52-15-1, 52-16-1, 52-17-1, 52-18-1, 52-19-1



IFF1E006




- TORX® screwdrivers
- 7 pieces



IFF1E006 1 445x181x40

414-10-75, 414-15-100, 414-20-100, 414-25-125, 414-27-125, 414-30-150, 414-40-150





IFF1E007



- Electrician straight and stubby screwdrivers, enginner slotted screwdriver
- 7 pieces

IFF1E007	1	445x181x40	
408-3-75, 408-3.5-100, 408-4-100, 408-5.5-125, 408-6.5-150	①		
407-8-150	①		
408-5.5-25	①		

IFF1E008



- Phillips screwdrivers
- 5 pieces

IFF1E008	1	445x181x40	
409-0-75, 409-1-100, 409-2-125, 409-3-150	①		
409-2-25	①		


IFF1E009



- Pozidriv and Stubby screwdrivers
- 5 pieces

IFF1E009	1	445x181x40	
413-0-75, 413-1-100, 413-2-125, 413-3-150	①		
413-2-25	①		


IFF1E010

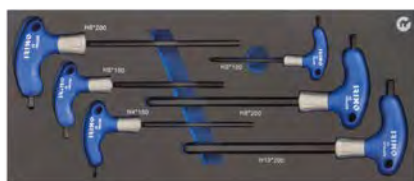

- T-Handle hexagonal screwdrivers
- 6 pieces

IFF1E010	1	445x181x40	
42-H3-100, 42-H4-150, 42-H5-150, 42-H6-200, 42-H8-200, 42-H10-200	①		


IFF1E011

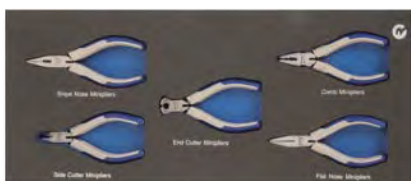

- Minipliers
- 5 pieces

IFF1E011	1	445x181x40	
601M-125-1			
612M-125-1			
624M-125-1			
626M-125-1			
604M-125-1			

IFF1E012

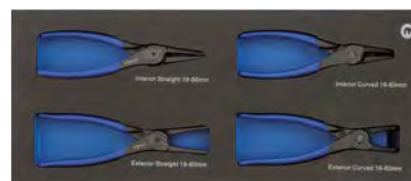

- Circlip pliers exterior and interior
- 4 pieces

IFF1E012	1	445x181x40	
621571	①		
621671	①		
621771	①		
621871	①		

2



3



4



5



6



7



8



9



10



11



12



TROLLEY FOAMS 3/3 & 1/3 SYSTEM

IFF1E013



- Pliers
- 4 pieces



IFF1E013

1

445x181x40

601-180-1



624-160-1



612-160-1



634-250-1



IFF1E014



- Files
- 5 pieces



IFF1E014

1

445x181x40

534411




534351



534321



534291



534381



IFF1E015



- Socket set 1/2", sliding T-Handle, ratchet
- 21 pieces



IFF1E015

1

445x181x40


121-10-1, 121-11-1, 121-12-1,
121-13-1, 121-14-1, 121-15-1,
121-16-1, 121-17-1, 121-18-1,
121-19-1, 121-21-1, 121-22-1,
121-23-1, 121-24-1, 121-27-1,
121-30-1, 121-32-1



125-70-1



125-42-1



125-23-1



125-25-1



IFF1E016



- Socket set 1/4", T-Handle, extensions, ratchet
- 18 pieces



IFF1E016


1

445x181x40


101-04-1, 101-045-1, 101-05-1,
101-055-1, 101-06-1, 101-07-1,
101-08-1, 101-09-1, 101-10-1,
101-11-1, 101-12-1, 101-13-1,
101-14-1




105-70-1




105-42-1




105-50-1



105-22-1



105-24-1



IFF1E017



- Pin punches and chisel
- 8 pieces




IFF1E017

1

445x181x40

504-200-1



516-002-1, 516-003-1, 516-004-1,
516-005-1, 516-006-1



512-010-1, 512-012-1



IFF1E018



- Striking and cutting tools
- 4 pieces



IFF1E018

1

445x181x40

529171




527-51-2




982-TOR-1



668-150-1





IFF1E019



- Bit set 1/4", measuring tape, battery
- 72 pieces

IFF1E019	1	445x181x40	
475-61-1			
48-9-H			
980-3-1			
L-ALUM-1			

IFF1E024



- Insulated pliers and cutter
- 3 pieces

IFF1E024	1	445x181x40	
601V-180-1			
612V-160-1			
624V-160-1			

IFF1E021



- Stud extractor and pullers
- 8 pieces

IFF1E021	1	445x181x40	
701-90-1			
702-40-1			
703-40-1			
716-5-1			

IFF1E025



- Insulated 1000V screwdrivers
- 6 pieces

IFF1E025	1	445x181x40	
408V-3-100, 408V-4-100, 408V-5.5-125, 408V-6.5-150			
409V-1-150, 409V-2-175			

IFF1E023



- Adjustable central nut and slip joint plier
- 2 pieces

IFF1E023	1	445x181x40	
5-250C-1			
634Q-250-1			

2



3



4



5



6



7



8



9



10



11



12



WORKBENCH

9062-1500-1

9062-1800-1



1500x640x685
1800x640x865



56.9
68.2

9062-P1500-1

9062-P1800-1

METAL PANEL FOR WORKBENCH


- With reinforced frame for 9062 workbenches
- Standard holes rounded diam. 5 mm
- 25 mm distance between holes
- Composed by three metal sheets with two supporting poles
- Specific holes made to attach them to wall if the workbench is not needed
- Possibility to attach to the workbench with two fixing parts (9062-FIX-1)




1500x990
1800x990



14.7
17.6

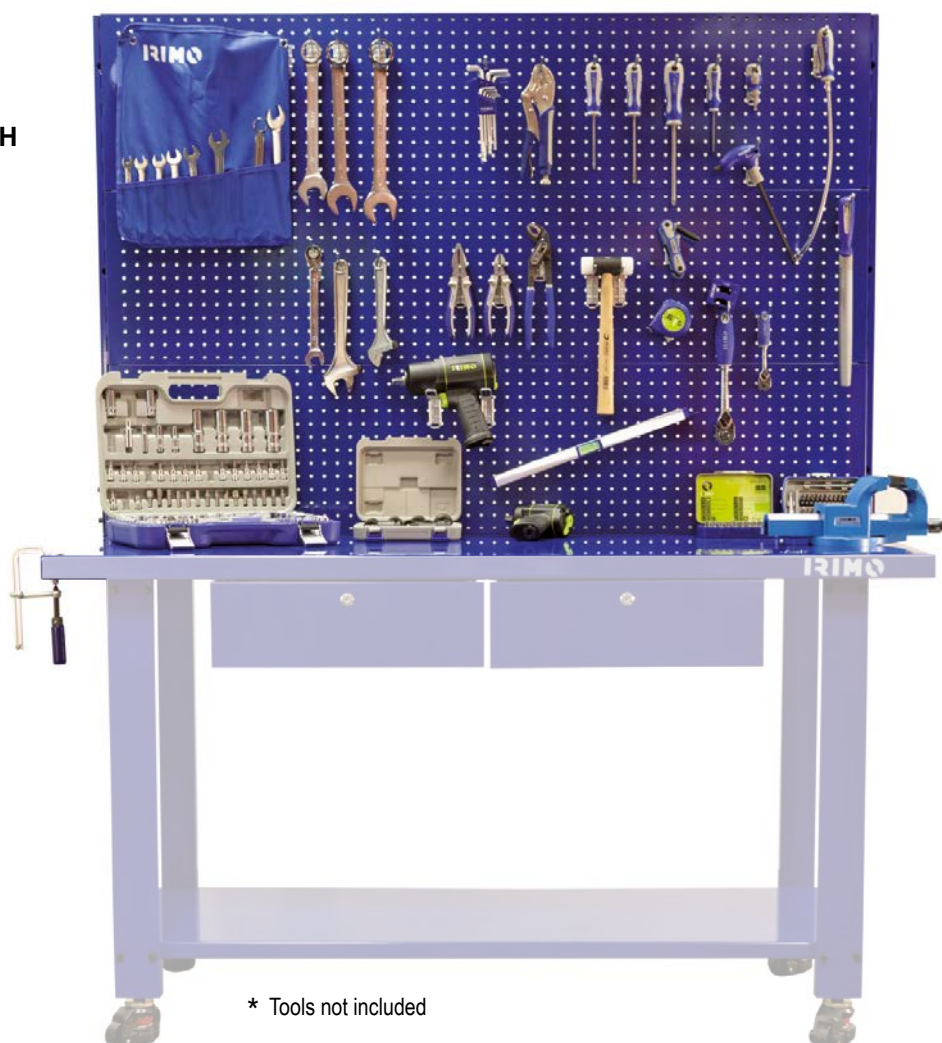

* Tools not included



- Heavy duty steel workbench with 4-leg
- Sturdy metallic workbench
- 4 height adjustable legs
- Foot with threaded stud ended with anti-slippery rubber
- 4 optional wheels (9062-CAST-1)
- Two drawers 450 mm for 1.500 mm version
Three drawers 450 mm for 1.800 mm version
- With lock key
- Same plate thickness on top and bottom tray: 2 mm
- Strong anti-scratch paint
- Max load capacity 500 kgs top and 200 kgs on the bottom tray
- Very well protected in a wooden box and super easy to mount

9062-1500-1	1	1500x640x865	500
9062-1800-1	1	1800x640x865	500

9062-P1500-1	1	1500x990	14.7
9062-P1800-1	1	1800x990	17.6


WHEELS, PANEL ADAPTORS AND HOOK KIT



- 2 in 1 wheel for 9062 workbenches
- Convertible into fixed legs by moving the red wheel and the rubber block will go down until making it steady
- Simple threaded stud insertion into the leg will make the process easy to have two options for the workbench



9062-CAST-1	1	140x202x90	2.6

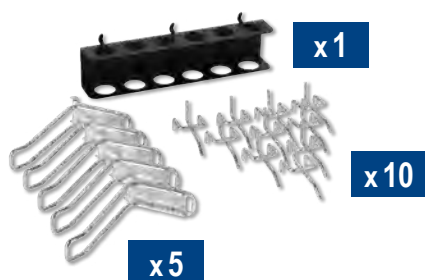

- Kit of three different hooks for rounded hole panels

9062-HOOK-1	1	300



- Two squares with bolts for fixing the panel into the 9062 workbench

9062-FIX-1	1	320

WORKBENCH

FOLDABLE WORKBENCH



- Foldable workbench supporting up to 160 kg of weight
- Very compact: folds flat for easy transport and storage
- Adjustable pivot pins and jaw retention slots provide clamping versatility and secure material retention
- Double clamping cranks increase clamping strength and versatility
- Anti-slip rubber feet
- Sturdy steel frame construction
- Specially designed for easy installation and cleaning
- Folded size: 150x610x900 mm



9062FWB160



1



760x610x605



160



7.2

TRANSPORTERS

TRANSPORTER



150

9063HT150



300

9063HT300

- Strong Steel frame
- Steel plate provide high robustness
- Wheels: 2 fixed and 2 rear swivel for easy maneuverings
- Push/pull handle that folds for easy storage and carriage
- Non-slip platform surface
- Overall size 150 kgs:
 - Unfolded: 730x470x820 mm
 - Folded: 730x470x225 mm
- Overall size 300 kgs:
 - Unfolded: 920x620x870 mm
 - Folded: 920x620x300 mm



9063HT150



1



730x470



150



25x100



7.5

9063HT300

1

920x620

300

25x125

15.0



9063HT150FI



9063HT150SW



9063HT300FI



9063HT300SW

SPARE PARTS



9063HT150FI

(2x) 4" fixed wheels



9063TH150 130x100x30 0.30

9063HT150SW

(2x) 4" swivel wheels

9063TH150 130x100x30 0.35

9063HT300FI


(2x) 5" fixed wheels

9063TH300 157x125x37 0.80

9063HT300SW

(2x) 5" swivel wheels

9063TH300 157x125x37 0.90



FOLDABLE TRANSPORTER



- Robust
- Elastic bands included to fix the load (safety feature)
- Steel frame
- 250x450 mm aluminum footplate
- 170 mm PP wheels
- Overall size:
480x420x740-1000 mm

9063FT90	1	250x450	90	170	4.3
----------	---	---------	----	-----	-----

METALLIC TOOL BOXES

TWO HANDLE MODEL



902021 / 902031



902131

- Cantilever style tool box with fixed handles for easy opening
- Tube type handle is user friendly, specially if the box is very loaded
- Fixed dividers in the top trays make the small pieces storage comfortable and easy
- Hinge system allows easy opening of the lids and avoids dust entering the tool box
- The box can be locked by padlock
- All corners are bent or ground to avoid sharp edges
- Made of high degree metal sheet, ensures product performance and longevity

902021	1	400x210x190	3	8	3.4
902031	1	500x210x190	3	10	4.1
902131	1	500x210x245	5	12	5.4

METALLIC TOOL BOXES

ALUMINIUM TOOL CASE WITH TOOLS

x 97




9024-1TS1	1	460 x 115 x 365	8.8
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1			
121-08-1, 121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-21-1, 121-22-1			
25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-17-2, 25-19-12			
407-5.5-125		409-1-100	
407-6.5-150		409-2-125	
105-70-1		105-50-1	
105-40-1		105-42-1	
105-22-1		105-24-1	
125-70-1		125-40-1	
125-23-1		125-25-1	
125-43-1			
46-8-F		475-32-1	
5-250C-1		604-160-1	
612-160-1		601-180-1	
625-180-1		634-250-1	
522-31-2		665-200-1	
980-3B-1			

ALUMINIUM TOOL CASE WITH TOOLS

x 145



9024-1TS145	1	450 x 115 x 290	12.5
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1			
121-08-1, 121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-16-1, 121-17-1, 121-18-1, 121-19-1, 121-21-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1			
25-08-2, 25-09-2, 25-10-2, 25-11-2, 25-12-2, 25-13-2, 25-14-2, 25-15-2, 25-16-2, 25-17-2, 25-18-2, 25-19-2			
105-70-1		105-50-1	
105-22-1		105-24-1	
105-40-1		105-42-1	
105-48-1		5-250C-1	
125-23-1		125-25-1	
125-70-1		125-40-1	
125-43-1		125-53-1, 125-54-1	
46-8-F		475-61-1	
801-041-1		980-5-1	
666-156-1		665-200-1	
520-43-2		L-ALUM-1	
634-250-1		632-220-1	
624-160-1		601-180-1	
612-160-1		604-160-1	
984-6D-1		475-5-1	



FABRIC BAGS

TOOL BAG WITH TUBULAR HANDLE



- 17" Open style bag for easy quick view and accessibility
- Soft bottom reinforced with plastic feet
- Hard waterproof bottom
- 11 Different vertical side pouches for better tool organization
- Aluminum handle for strengthening the structure with foam grip
- Detachable shoulder strap with cushion on the adjustable shoulder part for easier transportation
- 600x300 Denier fabric ensures product performance and longevity
- Delivered folded

9022-1-16SB	1	440x210x310	21	15	1.5

TOOL BAG WITH ZIP



- 16" Bag with zip closing system for quick view and accessibility
- Hard waterproof bottom
- 10 External divers size pouches and 14 internal vertical pouches for better tool organization
- Some external pouches are covered for better protecting and a measuring tape holder is also included
- Detachable shoulder strap with cushion on the adjustable shoulder part
- 600x300 Denier fabric ensures product performance and longevity

9022-2-16HB	1	420x240x300	24	18	1.2

TOOL BAG WITH TUBULAR HANDLE



- 19" Open style bag for easy quick view and accessibility
- Soft bottom reinforced with plastic feet
- Hard waterproof bottom
- 12 Different vertical side pouches inside and outside for better tool organization and measuring tape holder
- Internal detachable panel with 10 pouches and elastics for tool holding
- Specific Velcro straps for spirit levels or any other long tool
- Aluminum handle for strengthening the structure with foam grip
- Detachable shoulder strap with cushion on the adjustable shoulder part for easier transportation
- 600x300 Denier fabric ensures product performance and longevity
- Delivered folded

9022-1-19HB	1	490x240x350	32	20	1.5

TOOL BAG WITH ZIP



- 19" Bag with zip closing system for quick view and accessibility
- Hard waterproof bottom
- 17 External divers size pouches and 14 internal vertical pouches for better tool organization
- Some external pouches are covered for better protecting and a measuring tape holder is also included
- Detachable shoulder strap with cushion on the adjustable shoulder part
- 600x300 Denier fabric ensures product performance and longevity

9022-2-19HB	1	490x240x370	35	20	1.5

FABRIC BAGS



LAPTOP AND TOOL BACK-PACK



* The bag comes without tools

- Large storage capacity thanks to several pouches and a detachable tool organizer
- Foam inserts on the upper and lower back areas for better back protection
- Dedicated laptop compartment
- Side strap for compaction (width adjustment)
- Detachable part: 10 pockets of different sizes and elastic strap for better tool distribution
- Smartphone pocket within front compartment
- 600D fabric ensures product performance and long life
- Bottom part: 4 hard plastic support points for stability and protection against wet surfaces
- Reinforced handle



9022-BP1



1



300x450x175



20



16



1.93

BACK-PACK WITH WHEELS



* The bag comes without tools

- Telescopic handle and two fixed wheels for easy transport
- Large storage capacity thanks to several internal/external pouches and a detachable tool organizer
- Side straps for compaction (width adjustment)
- Detachable organizer with two handles: 51 pockets of different sizes distributed on four sides for better tool distribution
- Large internal compartments, useful for long tools, laptop or documents
- Separate internal pocket with zip for wallet, keys and mobile phone
- Measuring tape holder
- Business card holders
- 600D fabric ensures product performance and long life
- Bottom part: 2 hard plastic support points for stability and protection against wet surfaces



9022-BPW



1



360x440x220




26



20



4



POUCHES, BELTS AND FOLDERS

FOLDER – EMPTY



- Multiple elastics in bottom and lid for better tool distribution
- Double zip
- Rubber soft handle
- Net on the lid for documentation

€			g
9022-4-35	1	353x50x310	810

FOLDER, WITH TOOLS



x 28

€			kg
9022-4-35TS1	1	353x50x310	3
475R-1/4-110		46-9-H	
5-200C-1		624-160-1	
601-160-1		520-43-2	
668-150-1		980-5-1	
9022-4-35			

HAMMER HOLDER



€			g
9022-3-20	1	170x70x120	120

STRIKING SET



€			g
9022-3-20TS1	1		790
9022-3-20		520-43-2	

STRIKING SET



€			g
9022-3-20TS2	1		790
9022-3-20		520-41-2	

POUCHES, BELTS AND FOLDERS

PLIER POUCH



9022-3-30	1	260 x 95	40

TOOL POUCH



9022-3-40	1	290 x 10 x 150	60

ELECTRICIAN 4 PIECES SET IN POUCH



9022-3-30TS1	1	260 x 95 x 30	580

407-4-100		409-1-100	
-----------	--	-----------	--

601-180-1		668-150-1	
-----------	--	-----------	--

9022-3-30	
-----------	--

MRO 7 PIECES SET IN POUCH



9022-3-40TS1	1	290 x 60 x 150	1000

407-6.5-150		409-2-125	
-------------	--	-----------	--

624-140-1		601-160-1	
-----------	--	-----------	--

665-200-1		5-150C-1	
-----------	--	----------	--

9022-3-40		980-3-1	
-----------	--	---------	--

ELECTRICIAN 4 PIECES SET IN POUCH



9022-3-30TS2	1	260 x 95 x 30	550

407-4-100		409-1-100	
-----------	--	-----------	--

624-160-1		668-150-1	
-----------	--	-----------	--

9022-3-30	
-----------	--

INSULATED 7 PIECES SET IN POUCH




9022-3-40TS2	1	290 x 60 x 150	1000

408V-4-100		409V-1-150	
------------	--	------------	--

624V-160-1		612V-160-1	
------------	--	------------	--

665-200-1		5-150C-1	
-----------	--	----------	--

9022-3-40		980-3-1	
-----------	--	---------	--



10 POCKETS TOOL POUCH



9022-3-50	1	260x70x355	480

ADJUSTABLE BELT



9022-3-10	1	1500x10x75	200

MRO 9 PIECES SET IN POUCH



9022-3-50TS1	1	260x95x355	2400

407-5.5-125		409-1-100	
407-6.5-150		409-2-125	
520-43-2		634-250-1	
624-160-1		982-TOR-1	
9022-3-50		980-5-1	

2



3



4



5



6



7



8



9



10



11




12



02.

WRENCHES

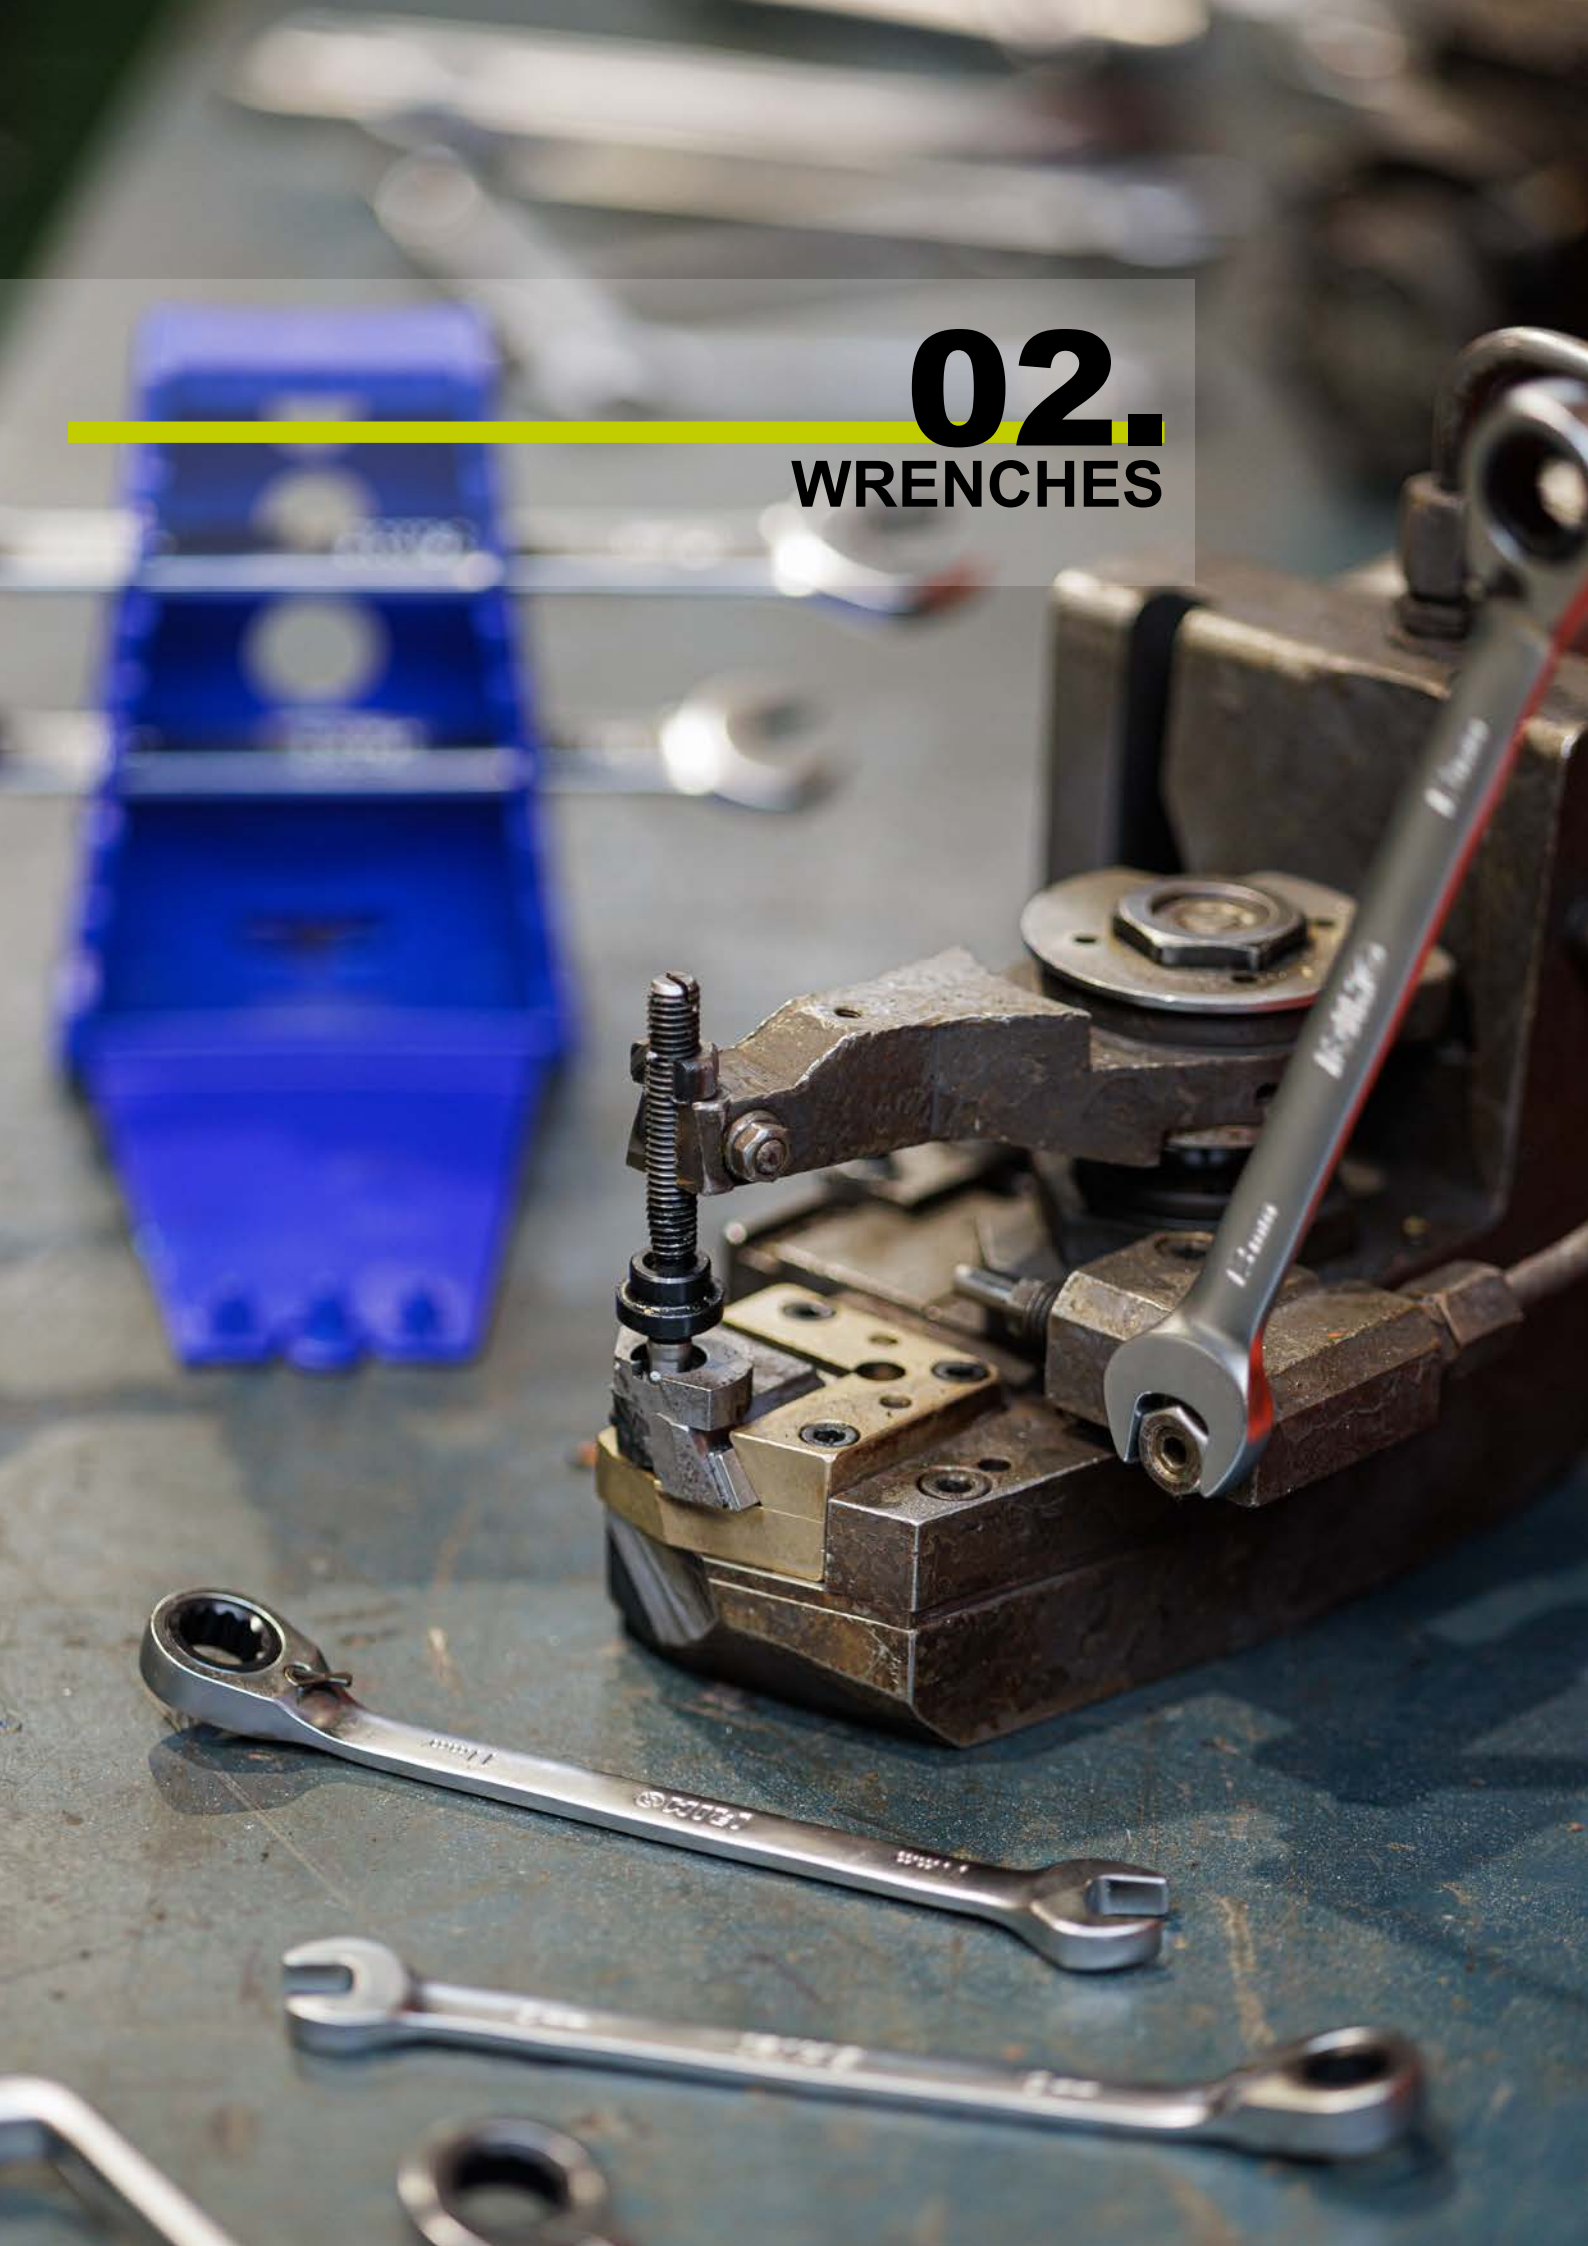



Adjustable wrenches

Side nut adjustable invented by

IRIMO


ISO + 125%





ADJUSTABLE WRENCHES

HEAVY DUTY ADJUSTABLE WRENCH

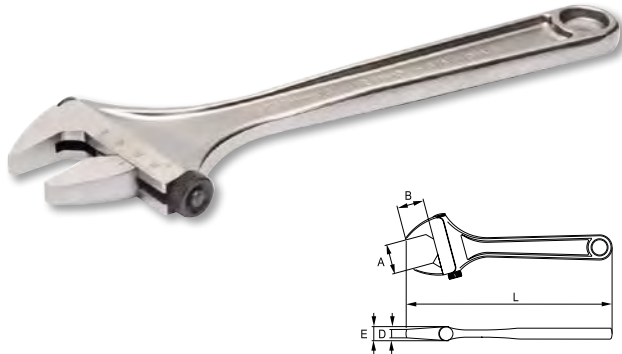

- Material: CrV
- Finish: Chrome-plated matt finished
- Hardness: 40-45 HRc
- Jaws angled at 15° to give good access even in confined spaces
- Standards: UNE 16532, ISO 6787, DIN 3117

Q			A mm	B mm	D mm	E mm	L mm	g
001021	5	150 mm - 6"	21	18.5	6.5	12	155	140
001031	5	200 mm - 8"	29	26	8	14	205	290
001041	5	250 mm - 10"	34	32	9	17	255	510
001051	3	300 mm - 12"	39	36	10	20	305	795
001061	1	400 mm - 16"	49	44	14	26	405	1.620
001071	1	500 mm - 20"	62	53	17	30	500	2.860
001081	1	750 mm - 30"	78	70	23	37	750	5.550

CENTRAL NUT



- Material: CrV
- Black finish
- Hardness: 40-45 HRc
- Jaws angled at 15° to give access even in confined spaces
- Standards: UNE 16532, ISO 6787, DIN 3117
- -1 Retail packaging
- -2 Industrial packaging

Q			A mm	B mm	D mm	E mm	L mm	g
5-100-1	5	100 mm - 4"	13	13.5	3.5	9	115	60
5-150-1	5	150 mm - 6"	20	21	5.5	12	160	130
5-200-1	5	200 mm - 8"	24	26	7.5	13.5	205	250
5-250-1	5	250 mm - 10"	29	29.5	9	16	260	405
5-300-1	5	300 mm - 12"	36	36	11	19	310	650
5-100-2	60	100 mm - 4"	13	13.5	3.5	9	115	60
5-150-2	50	150 mm - 6"	20	21	5.5	12	160	130
5-200-2	40	200 mm - 8"	24	26	7.5	13.5	205	250
5-250-2	30	250 mm - 10"	29	29.5	9	16	260	405
5-300-2	20	300 mm - 12"	36	36	11	19	310	650
5-375-2	1	375 mm - 15"	43	45	13	24	385	1.230
5-450-2	1	450 mm - 18"	57	53	15	27.5	465	2.000

CENTRAL NUT



- Material: CrV
- Finish: Chrome-plated
- Hardness: 40-45 HRc
- Jaws angled at 15° to give good access even in confined spaces
- Standards: UNE 16532, ISO 6787, DIN 3117
- -1 Retail packaging
- -2 Industrial packaging

Q			A mm	B mm	D mm	E mm	L mm	g
5-100C-1	5	100 mm - 4"	13	13.5	3.5	9	115	60
5-150C-1	5	150 mm - 6"	20	21	5.5	12	160	130
5-200C-1	5	200 mm - 8"	24	26	7.5	13.5	205	250
5-250C-1	5	250 mm - 10"	29	29.5	9	16	260	405
5-300C-1	5	300 mm - 12"	36	36	11	19	310	650
5-375C-2	1	375 mm - 15"	43	45	13	24	385	1.230
5-450C-2	1	450 mm - 18"	57	53	15	27.5	465	2.000



ADJUSTABLE WRENCHES

PHOSPHATED ADJUSTABLE WRENCH SET



- Material: CrV; Black finish
- Hardness: 40-45 HRC
- Jaws angled at 15° to give access even in confined spaces
- Standards: UNE 16532, ISO 6787, DIN 3117



5-4-W

1

4

50x330x110


1.500

5-150-2, 5-200-2, 5-250-2, 5-300-2



OPEN END WRENCHES

DOUBLE OPEN END WRENCHES



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRC
- Standards: DIN 3110, ISO 10102, ISO 1085, ISO 1711, ISO 691, ISO 3318

		S1x S2 mm	L mm	B1 mm	B2 mm	F1 mm	F2 mm	E1 mm	E2 mm	E mm	G mm	g
10-0405-1	1	4x5	105	13	15	6.5	7.5	7.2	7	3.2	2.5	15
10-0607-1	1	6x7	122	17.4	19.4	7.5	8.5	8.1	9	4.1	2.8	21
10-0809-1	1	8x9	137	20.4	22.4	8.5	9.5	10.5	11.2	4.6	3.3	30
10-1011-1	1	10x11	151.4	24.2	27.2	10.5	11.5	11.6	13.3	5.4	3.8	46
10-1013-1	1	10x13	151.4	24.2	37.2	10.5	11.5	11.6	13.3	5.4	3.8	46
10-1213-1	1	12x13	166.5	29.4	31.4	12.5	13.5	13.6	15.3	6.1	4	66
10-1415-1	1	14x15	182	32.4	35.4	13.5	14.5	16	17.5	6.5	4.4	95
10-1617-1	1	16x17	196.5	36.4	38.4	15.5	16.5	18.5	19.6	6.9	4.8	124
10-1719-1	1	17x19	221	40.4	42.4	16.5	18.5	20.8	22.4	7.4	5.1	160
10-1819-1	1	18x19	211.9	40.4	42.4	16.5	18.5	20.8	21.2	7.4	5.1	157
10-2022-1	1	20x22	226.9	43.4	47.4	18.5	19.5	23.3	24.5	8.6	5.6	188
10-2123-1	1	21x23	241.9	46.4	50.4	18.5	20.5	23.6	26	9.2	5.8	211
10-2224-1	1	22x24	241.9	46.4	50.4	18.5	20.5	23.6	26	9.2	5.8	208
10-2426-1	1	24x26	261.9	50.4	54.4	21.5	23.5	27.9	29.8	10	6.2	293
10-2427-1	1	24x27	261.9	50.4	54.4	21.5	23.5	27.9	29.8	10	6.2	284
10-2528-1	1	25x28	281.9	54.4	59.4	23.5	24.5	28.6	30.7	10.6	6.6	366
10-2729-1	1	27x29	282.4	54.6	59.6	23.5	24.5	28.6	30.7	10.6	6.6	362
10-3032-1	1	30x32	302.9	61.4	68.4	24.5	26.5	33.4	35.5	11	7	481

DOUBLE OPEN END WRENCH SET



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRC
- Standards: DIN 3110, ISO 10102, ISO 1085, ISO 1711, ISO 691, ISO 3318

10-8-H	1	8	250 x 120 x 50	870
10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1				

DOUBLE OPEN END WRENCH SET



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRC
- Standards: DIN 3110, ISO 10102, ISO 1085, ISO 1711, ISO 691, ISO 3318

10-12-H	1	12	350 x 150 x 70	2.975
10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1, 10-2123-1, 10-2426-1, 10-2528-1, 10-3032-1				

DOUBLE OPEN END WRENCH SET



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRC
- Standards: DIN 3110, ISO 10102, ISO 1085, ISO 1711, ISO 691, ISO 3318


10-12-W	1	12	400 x 140 x 100	2.975
10-0607-1, 10-0809-1, 10-1011-1, 10-1213-1, 10-1415-1, 10-1617-1, 10-1819-1, 10-2022-1, 10-2123-1, 10-2426-1, 10-2528-1, 10-3032-1				

Find the Ideal Wrench
for Every Project



COMBINATION WRENCHES

COMBINATION WRENCHES IN MM

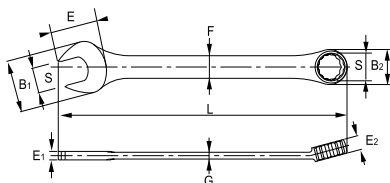


- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRC
- Standards: DIN 3113, ISO 1711-1, ISO 3318, ISO 691, ISO 7738
- -1 Retail packaging
- -2 Industrial packaging

Q		S mm	L mm	B1 mm	B2 mm	F mm	E mm	E1 mm	E2 mm	G mm	g
25-06-1	1	6	103	15.7	10.6	6.2	7.9	3.7	5.2	3	15
25-07-1	1	7	109	18	12.1	6.8	8.2	3.7	5.5	3	17
25-08-1	1	8	119	18.8	13.6	6.8	9.9	4.0	6	3.3	21
25-09-1	1	9	124	21	15.1	7.9	10.4	4.0	6.8	3.4	26
25-10-1	1	10	134	22.8	16.2	8.6	10.7	4.8	7	3.6	38
25-11-1	1	11	143	25.8	17.1	9.1	12.6	4.8	7.5	3.6	39
25-12-1	1	12	154	27.8	18.9	10	13.2	5.2	8	4.2	51
25-13-1	1	13	164	29.8	20.2	11.5	14.6	5.2	8.3	4.2	63
25-14-1	1	14	174	29.8	21.2	11.4	15.8	5.8	8.9	4.6	68
25-15-1	1	15	183	34.1	22.3	12.2	16.9	5.8	8.9	4.6	85
25-16-1	1	16	194	35.1	23.8	13.2	17.6	6.3	9.5	5	107
25-17-1	1	17	203	37.2	25.3	14.4	18.6	6.3	10	5	118
25-18-1	1	18	214	39.2	26.8	14.4	20.5	6.7	10.5	5.2	137
25-19-1	1	19	228	41.4	28.3	15.8	21.1	7.0	11.2	5.2	163
25-20-1	1	20	240	42.4	29.7	17.3	22.8	7.5	11.4	5.5	186
25-21-1	1	21	249.5	45.4	32.4	17.3	22.8	8.6	12.6	6	210
25-22-1	1	22	249.5	45.4	32.4	17.3	22.8	8.6	12.2	6	202
25-23-1	1	23	270	49.7	36.1	20.3	25	9.2	13.6	6.4	281
25-24-1	1	24	270	49.7	36.1	20.3	25	9.2	13.6	6.4	276
25-25-1	1	25	289.5	53.4	39.6	22.5	27.6	9.6	14.2	6.8	346
25-26-1	1	26	289.5	53.4	39.6	22.5	27.6	9.6	14.2	6.8	345
25-27-1	1	27	310	58.4	41.6	23.3	29.5	10.0	14.6	7.2	382
25-28-1	1	28	310	58.4	41.6	23.3	29.5	10.0	14.6	7.2	402
25-29-1	1	29	330	60.4	45.6	23.3	32.1	10.6	15.6	7.6	476
25-30-1	1	30	330	60.4	45.6	23.3	32.1	10.6	15.6	7.6	468
25-32-1	1	32	349	67.4	48.8	25.3	35.6	11.2	17.8	8	567
25-34-1	1	34	350	67.4	48.8	25.3	35.6	11.2	17.8	8	541
25-36-1	1	36	401	74	54	31	62	10.4	17	8	787
25-41-2	1	41	436	82	61	34	70	12	19.5	8	1.070
25-46-2	1	46	556	92	66	33.6	79.8	15	23	11	1.750
25-50-2	1	50	602	100	73	36.6	86.7	17	26	12	2.200
25-55-2	1	55	612	113	84	42	94	18	28	14.5	3.070
25-60-2	1	60	660	125	90	47	100	20	30	16	3.500
25-65-2	1	65	710	132	98	52	110	21	34	18	4.750
25-70-2	1	70	760	140	102	52	110	22	35	18	5.550
25-75-2	1	75	810	150	108	55	120	25	38	19	6.800
25-80-2	1	80	820	179	131	60	120	30	38	20	10.000
25-85-2	1	85	820	179	131	60	120	30	38	20	10.000
25-90-2	1	90	790	179	131	60	120	30	38	20	10.000
25-95-2	1	95	860	187	145	62	120	32	43	20	12.000
25-100-2	1	100	860	187	145	62	120	32	43	20	12.000

Q		S mm	L mm	B1 mm	B2 mm	F mm	E mm	E1 mm	E2 mm	G mm	g
25-06-2	1	6	103	15.7	10.6	6.2	7.9	3.7	5.2	3	15
25-07-2	1	7	109	18	12.1	6.8	8.2	3.7	5.5	3	17
25-08-2	1	8	119	18.8	13.6	6.8	9.9	4.0	6	3.3	21
25-09-2	1	9	124	21	15.1	7.9	10.4	4.0	6.8	3.4	26
25-10-2	1	10	134	22.8	16.2	8.6	10.7	4.8	7	3.6	38
25-11-2	1	11	143	25.8	17.1	9.1	12.6	4.8	7.5	3.6	39
25-12-2	1	12	154	27.8	18.9	10	13.2	5.2	8	4.2	51
25-13-2	1	13	164	29.8	20.2	11.5	14.6	5.2	8.3	4.2	63
25-14-2	1	14	174	29.8	21.2	11.4	15.8	5.8	8.9	4.6	68
25-15-2	1	15	183	34.1	22.3	12.2	16.9	5.8	8.9	4.6	85
25-16-2	1	16	194	35.1	23.8	13.2	17.6	6.3	9.5	5	107
25-17-2	1	17	203	37.2	25.3	14.4	18.6	6.3	10	5	118
25-18-2	1	18	214	39.2	26.8	14.4	20.5	6.7	10.5	5.2	137
25-19-2	1	19	228	41.4	28.3	15.8	21.1	7.0	11.2	5.2	163
25-20-2	1	20	240	42.4	29.7	17.3	22.8	7.5	11.4	5.5	186
25-21-2	1	21	249.5	45.4	32.4	17.3	22.8	8.6	12.6	6	210
25-22-2	1	22	249.5	45.4	32.4	17.3	22.8	8.6	12.2	6	202
25-23-2	1	23	270	49.7	36.1	20.3	25	9.2	13.6	6.4	281
25-24-2	1	24	270	49.7	36.1	20.3	25	9.2	13.6	6.4	276
25-25-2	1	25	289.5	53.4	39.6	22.5	27.6	9.6	14.2	6.8	346
25-26-2	1	26	289.5	53.4	39.6	22.5	27.6	9.6	14.2	6.8	345
25-27-2	1	27	310	58.4	41.6	23.3	29.5	10.0	14.6	7.2	382
25-28-2	1	28	310	58.4	41.6	23.3	29.5	10.0	14.6	7.2	402
25-29-2	1	29	330	60.4	45.6	23.3	32.1	10.6	15.6	7.6	476
25-30-2	1	30	330	60.4	45.6	23.3	32.1	10.6	15.6	7.6	468
25-32-2	1	32	349	67.4	48.8	25.3	35.6	11.2	17.8	8	567
25-34-2	1	34	350	67.4	48.8	25.3	35.6	11.2	17.8	8	541
25-36-2	1	36	401	74	54	31	62	10.4	17	8	787
25-41-2	1	41	436	82	61	34	70	12	19.5	8	1.070
25-46-2	1	46	556	92	66	33.6	79.8	15	23	11	1.750
25-50-2	1	50	602	100	73	36.6	86.7	17	26	12	2.200
25-55-2	1	55	612	113	84	42	94	18	28	14.5	3.070
25-60-2	1	60	660	125	90	47	100	20	30	16	3.500
25-65-2	1	65	710	132	98	52	110	21	34	18	4.750
25-70-2	1	70	760	140	102	52	110	22	35	18	5.550
25-75-2	1	75	810	150	108	55	120	25	38	19	6.800
25-80-2	1	80	820	179	131	60	120	30	38	20	10.000
25-85-2	1	85	820	179	131	60	120	30	38	20	10.000
25-90-2	1	90	790	179	131	60	120	30	38	20	10.000
25-95-2	1	95	860	187	145	62	120	32	43	20	12.000
25-100-2	1	100	860	187	145	62	120	32	43	20	12.000

COMBINATION WRENCHES IN INCHES

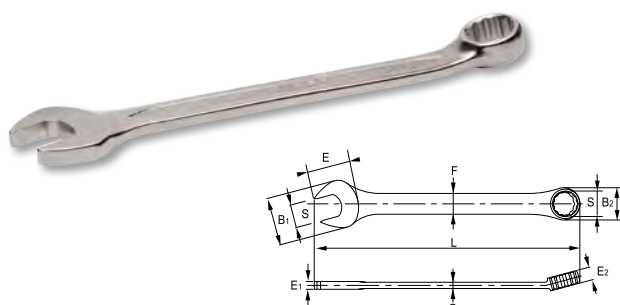

- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRc
- Standards: DIN 3113, ISO 1711-1, ISO 3318, ISO 691, ISO 7738
- -1 Retail packaging
- -2 Industrial packaging

		S	L	B1	B2	F	E	E1	E2	G	
		inch	mm	mm	mm	mm	mm	mm	mm	mm	g
25A-08-1	1	1/4"	103	15.9	10.6	6.6	7.9	3.7	5.2	3	15
25A-10-1	1	5/16"	119	19	13.6	7.2	9.9	4	6	3.3	21
25A-12-1	1	3/8"	124	21.2	15.1	8.3	10.4	4	6.8	3.4	26
25A-14-1	1	7/16"	143	26	17.1	9.5	12.6	4.8	7.5	3.6	39
25A-16-1	1	1/2"	164	30	20.2	11.9	14.6	5.2	8.3	4.2	63
25A-18-1	1	9/16"	174	30	21.2	11.8	15.8	5.8	8.9	4.6	68
25A-20-1	1	5/8"	194	35.3	23.8	13.6	17.6	6.3	9.5	5	107
25A-22-1	1	11/16"	214	39.4	26.8	14.8	20.5	6.7	10.5	5.2	137
25A-24-1	1	3/4"	228	41.6	28.3	16.2	21.1	7	11.2	5.2	163
25A-26-1	1	13/16"	249.5	45.4	32.4	17.3	22.8	8.6	12.6	6	210
25A-28-1	1	7/8"	249.5	45.4	32.4	17.3	22.8	8.6	12.6	6	210
25A-30-1	1	15/16"	270	49.7	36.1	20.3	25	9.2	13.6	6.4	281
25A-32-1	1	1"	289.5	53.4	39.6	22.5	27.6	9.6	14.2	6.8	346
25A-34-1	1	1.1/16"	310	58.4	41.6	23.3	29.5	10	14.6	7.2	382
25A-36-1	1	1.1/8"	330	60.4	45.6	23.3	32.1	10.6	15.6	7.6	476
25A-40-1	1	1.1/4"	349	67.4	48.8	25.3	35.6	11.2	17.8	8	567
25A-44-1	1	1.3/8"	350	67.4	48.8	25.3	35.6	11.2	17.8	8	541
25A-46-1	1	1.7/16"	401	74	54	31	62	10.4	17	8	787
25A-48-1	1	1.1/2"	401	74	54	31	62	10.4	17	8	787
25A-52-1	1	1.5/8"	435	80	61	34	70	11.5	19.5	8	1.050
25A-58-1	1	1.13/16"	555	91	66	34	79.8	15	23	11	1.850
25A-64-1	1	2"	602	100	73	36.6	86.7	17	26	12	2.215
25A-08-2	1	1/4"	103	15.9	10.6	6.6	7.9	3.7	5.2	3	15
25A-10-2	1	5/16"	119	19	13.6	7.2	9.9	4	6	3.3	21
25A-12-2	1	3/8"	124	21.2	15.1	8.3	10.4	4	6.8	3.4	26
25A-14-2	1	7/16"	143	26	17.1	9.5	12.6	4.8	7.5	3.6	39
25A-16-2	1	1/2"	164	30	20.2	11.9	14.6	5.2	8.3	4.2	63
25A-18-2	1	9/16"	174	30	21.2	11.8	15.8	5.8	8.9	4.6	68
25A-20-2	1	5/8"	194	35.3	23.8	13.6	17.6	6.3	9.5	5	107
25A-22-2	1	11/16"	214	39.4	26.8	14.8	20.5	6.7	10.5	5.2	137
25A-24-2	1	3/4"	228	41.6	28.3	16.2	21.1	7	11.2	5.2	163
25A-26-2	1	13/16"	249.5	45.4	32.4	17.3	22.8	8.6	12.6	6	210
25A-28-2	1	7/8"	249.5	45.4	32.4	17.3	22.8	8.6	12.6	6	210
25A-30-2	1	15/16"	270	49.7	36.1	20.3	25	9.2	13.6	6.4	281
25A-32-2	1	1"	289.5	53.4	39.6	22.5	27.6	9.6	14.2	6.8	346

COMBINATION WRENCH SET



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRc
- Standards: DIN 3113, ISO 1711-1, ISO 3318, ISO 691, ISO 7738

25-8-H	1	8	250 x 120 x 50	875
25-08-1, 25-10-1, 25-11-1, 25-13-1, 25-14-1, 25-17-1, 25-19-1, 25-22-1				

COMBINATION WRENCH SET



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRc
- Standards: DIN 3113, ISO 1711-1, ISO 3318, ISO 691, ISO 7738

25-12-H	1	12	350 x 50 x 70	2.975
25-10-1, 25-11-1, 25-12-1, 25-13-1, 25-14-1, 25-17-1, 25-19-1, 25-22-1, 25-24-1, 25-27-1, 25-30-1, 25-32-1				

COMBINATION WRENCH SET



- High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-50 HRc
- Standards: DIN 3113, ISO 1711-1, ISO 3318, ISO 691, ISO 7738


25-12-W	1	12	400 x 140 x 100	2.975
25-10-1, 25-11-1, 25-12-1, 25-13-1, 25-14-1, 25-17-1, 25-19-1, 25-22-1, 25-24-1, 25-27-1, 25-30-1, 25-32-1				

RATCHETING COMBINATION WRENCHES

RATCHETING COMBINATION WRENCH



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRc



Strong ratchet exceeds ISO plus endurance

R		S mm	B1 mm	B2 mm	E mm	L mm	g
18-06-1	1	6	15	14.3	4	128	27
18-07-1	1	7	16.4	16.8	4.4	138	35
18-08-1	1	8	18	18.3	4.8	140	38
18-09-1	1	9	20	20	4.8	150	48
18-10-1	1	10	22	21.5	5.1	160	57
18-11-1	1	11	24.5	23.5	5.5	165	67
18-12-1	1	12	26	25	5.9	170	82
18-13-1	1	13	28	26.4	6.4	180	95
18-14-1	1	14	30.8	28	6.7	190	113
18-15-1	1	15	33	30	7.3	200	130
18-16-1	1	16	24.5	31	7.8	210	158
18-17-1	1	17	37	33	8	225	180
18-18-1	1	18	39.5	35	8.2	235	213
18-19-1	1	19	40.8	36	8.4	245	233
18-21-1	1	21	44.8	42	9	290	343
18-22-1	1	22	44.8	42	9	290	345
18-24-1	1	24	52.8	48	9.7	332	503
18-27-1	1	27	56	53	10.8	359	550
18-30-1	1	30	62	58	11.2	404	750
18-32-1	1	32	65	62	12	424	900

RATCHETING COMBINATION WRENCH SET



- Ratcheting combination wrench set
- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRc

R		X		g
18-8-H	1	8	45x245x130	870
18-08-1, 18-10-1, 18-11-1, 18-12-1, 18-13-1, 18-14-1, 18-17-1, 18-19-1				


RATCHETING COMBINATION WRENCH SET



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRc

R		X		g
18-12-H	1	12	180x35x250	1.510
18-08-1, 18-09-1, 18-10-1, 18-11-1, 18-12-1, 18-13-1, 18-14-1, 18-15-1, 18-16-1, 18-17-1, 18-18-1, 18-19-1				


Stubby ratcheting combination wrenches



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRc
- -1 retail packaging

R		S mm	B1 mm	B2 mm	E1 mm	E2 mm	L mm	g
18S-08-1	1	8	18	18.3	5.3	7.2	90	30
18S-10-1	1	10	22	22	6.0	7.8	96	48
18S-13-1	1	13	28	28	6.8	9.1	108	72
18S-17-1	1	17	37	37	8.1	10.5	128	125
18S-19-1	1	19	40.8	40.8	8.5	11.2	138	163

FLEX HEAD RATCHETING COMBINATION WRENCHES



STUBBY RATCHETING COMBINATION WRENCH SET



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRc

R		S mm	B1 mm	B2 mm	E1 mm	E2 mm	L mm	g
18S-5-H	5	5	8-10-13-17-19	462				

RATCHETING DOUBLE RING WRENCH SET



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRc

R		S mm	B1 mm	B2 mm	E1 mm	E2 mm	L mm	g
18D-5-H	5	5	8x9, 10x11, 12x13, 16x17, 18x19	664				

- Material: High performance alloy steel
- Finish: Chrome-plated
- Hardness: 40-50 HRc

R		S mm	B1 mm	B2 mm	E1 mm	E2 mm	L mm	g
19-08-1	1	8	18.3	18	7.2	4.8	140	35
19-10-1	1	10	21.5	22	7.8	5.1	160	55
19-11-1	1	11	23.5	24.5	8.4	5.5	165	63
19-12-1	1	12	25	26	8.8	5.9	170	83
19-13-1	1	13	26.4	28	9.1	6.4	180	93
19-14-1	1	14	28	30.8	9.4	6.7	190	113
19-17-1	1	17	33	37	10.5	8	225	173
19-19-1	1	19	36.5	40.8	11.2	8.4	245	233

RATCHETING COMBINATION WRENCHES

FLEX HEAD RATCHETING COMBINATION WRENCH SET



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRC

IRIMO	1	8	45x240x140	850
19-8-H	1	8	45x240x140	850
19-08-1, 19-10-1, 19-11-1, 19-12-1, 19-13-1, 19-14-1, 19-17-1, 19-19-1				

FLEX HEAD RATCHETING COMBINATION WRENCH SET




- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRC

IRIMO	1	12	35x180x250	1.724
19-12-H	1	12	35x180x250	1.724
19-08-1, 19-09-1, 19-10-1, 19-11-1, 19-12-1, 19-13-1, 19-14-1, 19-15-1, 19-16-1, 19-17-1, 19-18-1, 19-19-1				

FLAT RING WRENCHES

DOUBLE RING END WRENCHES



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-48 HRC
- Standards: DIN 837, ISO 10103, ISO 1085

IRIMO	1	S1x S2 mm	B1 mm	B2 mm	E mm	L mm	g
020011	1	6x7	9.8	11	4.5	95	14
020031	1	8x9	12.5	14	5.5	110	22
020051	1	10x11	15	16.5	6	125	32
020071	1	12x13	18.5	20	6.5	140	46
020091	1	14x15	21	22.5	7	155	57
020121	1	16x17	24	25	7.5	170	73
020141	1	18x19	26.5	27.5	8	185	94
020171	1	20x22	29	32	9	205	125
020181	1	21x23	30	33	9.5	225	154
020201	1	24x26	35	37.8	11	250	210
020211	1	24x27	35	37.5	11	250	208
020221	1	25x28	37.5	41	11	275	280
020241	1	27x29	37.5	41	11	275	272
020251	1	30x32	43	45.5	12	300	367

DOUBLE RING END WRENCHES SET




- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- Hardness: 42-48 HRC
- Standards: DIN 837, ISO 10103, ISO 1085

IRIMO	1	8	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22 mm	500
021221	1	8	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22 mm	500
021251	1	12	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22, 21-23, 24-27, 25-28, 30-32 mm	1.550



OFFSET RING WRENCHES

DOUBLE OFFSET RING WRENCHES

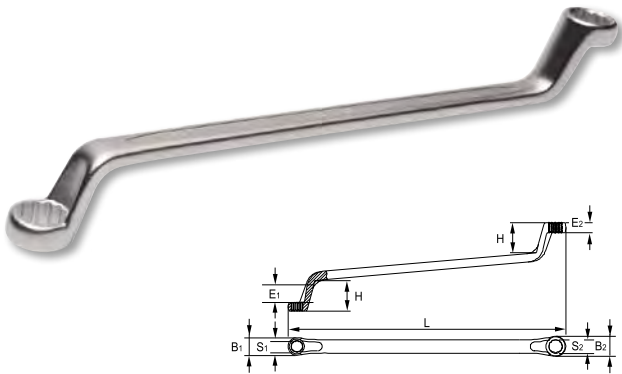

- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 42-48 HRC
- Standards: ISO 10104 and DIN 838
- -1 Retail packaging
- -2 Industrial packaging

R		S1x S2 mm	B1 mm	B2 mm	E1 mm	E2 mm	H mm	L mm	
15-0607-1	1	6x7	10.8	12.5	4.9	5.6	20	170	45
15-0809-1	1	8x9	13.4	15.3	6.0	6.8	21	182	70
15-1011-1	1	10x11	16.0	17.8	7.4	7.9	23	197	90
15-1213-1	1	12x13	18.8	20.2	8.4	8.9	25	213	126
15-1415-1	1	14x15	20.8	22.5	9.4	9.9	26	228	155
15-1617-1	1	16x17	24.2	25.7	10.4	10.9	29	246	193
15-1719-1	1	17x19	27.6	28.7	11.4	11.9	31	265	243
15-1819-1	1	18x19	27.6	28.7	11.4	11.9	31	265	241
15-2022-1	1	20x22	29.7	32.5	12.4	12.9	33	288	315
15-2123-1	1	21x23	31.0	33.2	12.3	13.3	33	310	341
15-2426-1	1	24x26	34.8	39.2	13.7	14.3	34	330	478
15-2427-1	1	24x27	34.8	39.2	13.7	14.3	34	330	475
15-2528-1	1	25x28	36.6	40.5	14.2	14.7	35	348	548
15-2729-1	1	27x29	42.0	45.2	15.0	16.0	37	372	662
15-3032-1	1	30x32	42.2	45.5	14.8	15.8	37	372	635
15-3236-2	1	32x36	48.5	54.0	16.5	17.8	41	417	962
15-3641-2	1	36x41	53.5	62.0	17.3	19.2	48	450	1.037

DOUBLE OFFSET RING WRENCHES SET



- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 42-48 HRC
- Standards: ISO 10104 and DIN 838

R					g
15-8-H	1	8	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22 mm		1.245

DOUBLE OFFSET RING WRENCHES SET




- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 42-48 HRC
- Standards: ISO 10104 and DIN 838

R					g
15-8-W	1	8	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22 mm		1.350
15-12-W	1	12	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22, 21-23, 24-27, 25-28, 30-32 mm		3.465

L-PIPE DOUBLE SOCKET WRENCHES

L-PIPE DOUBLE SOCKET WRENCHES

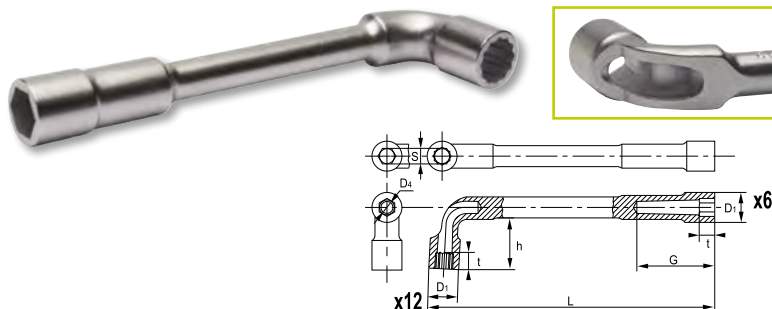

- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRC
- Standards: ISO 1711, ISO 691, ISO 2236

6x12	6x6	S		D1 mm	D4 mm	G mm	h mm	t mm	L mm	g
51-06-1	52-06-1	6	1	10	4.5	21.0	17	6.0	102	30
51-07-1	52-07-1	7	1	11	4.5	22.0	17.5	7.0	106	40
51-08-1	52-08-1	8	1	12.5	7.0	25.0	19.5	8.0	114	60
51-09-1	52-09-1	9	1	13.5	7.0	26.0	20.0	9.0	122	70
51-10-1	52-10-1	10	1	15.0	8.0	28.0	24.0	10.0	129	90
51-11-1	52-11-1	11	1	16.5	8.0	30.0	26.5	11.0	136	120
51-12-1	52-12-1	12	1	18.0	9.0	36.0	28.0	11.0	144	150
51-13-1	52-13-1	13	1	19.5	9.0	38.6	30.0	12.0	152	160
51-14-1	52-14-1	14	1	21.0	10.5	40.0	31.5	13.0	160	190
51-15-1	52-15-1	15	1	22.5	10.5	42.0	34.0	14.0	169	200
51-16-1	52-16-1	16	1	24.0	13.0	46.0	37.0	16.0	178	280
51-17-1	52-17-1	17	1	25.5	13.0	48.0	39.0	17.0	187	300
51-18-1	52-18-1	18	1	26.5	13.0	50.0	40.0	18.0	195	310
51-19-1	52-19-1	19	1	28.5	15.0	51.0	41.0	19.0	204	420
51-20-1	52-20-1	20	1	29.5	15.0	53.0	43.0	20.0	212	450
51-21-1	52-21-1	21	1	30.5	15.0	55.0	46.0	21.0	221	470
51-22-1	52-22-1	22	1	32.0	15.0	57.0	48.0	22.0	230	530
51-23-1	52-23-1	23	1	33.5	18.0	64.0	50.5	23.0	240	650
51-24-1	52-24-1	24	1	34.5	18.0	67.0	54.0	24.0	250	630
51-25-1	52-25-1	25	1	36.0	20.0	69.0	56.0	25.0	260	830
51-26-1	52-26-1	26	1	37.0	20.0	70.0	58.5	26.0	270	860
51-27-1	52-27-1	27	1	38.0	22.0	73.0	58.0	27.0	280	990
51-28-1	52-28-1	28	1	39.5	22.0	75.0	60.0	28.0	290	1.000
51-29-1	52-29-1	29	1	41.0	22.0	76.0	62.0	29.0	300	1.080
51-30-1	52-30-1	30	1	42.0	24.0	83.0	64.0	30.0	310	1.220
51-32-1	52-32-1	32	1	44.5	24.0	88.0	70.0	31.0	330	1.380

L-PIPE DOUBLE SOCKET WRENCHES SET




- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40-50 HRC
- Standards: ISO 1711, ISO 691, ISO 2236

6x12					g
51-8-W	1	8	8, 10, 11, 13, 14, 17, 19, 22 mm		1.980
6x6					g
52-8-W	1	8	8, 10, 11, 13, 14, 17, 19, 22 mm		1.980



TUBULAR SOLID WRENCHES


DOUBLE HEAD SOCKET WRENCHES

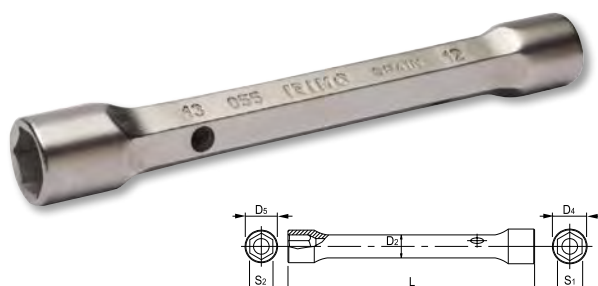

- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- From 16 onwards, with hole to locate the stud
- Hardness: 42-48 HRC
- Standards: UNE 16586

		S1x S2 mm	D4 mm	D5 mm	D2 mm	L mm	g
055011	10	6x7	10	11	7	103	31
055031	10	8x9	12.5	13.5	9	108	53
055051	10	10x11	15	16	11	120	78
055071	10	12x13	17	19	13	138	127
055091	10	14x15	20	21	14	143	152
055121	10	16x17	22	24	16	153	185
055141	10	18x19	25	26	18	163	235
055171	10	20x22	28	30	20	173	312
055181	5	21x23	29	31	21	183	359
055201	5	24x26	33	35	24	193	438
055211	5	24x27	33	37	24	193	466
055221	5	25x28	34	37	25	203	535
055241	5	27x29	37	39	27	208	592
055251	5	30x32	40	43	30	208	737

BAR HANDLE FOR SOCKET WRENCH

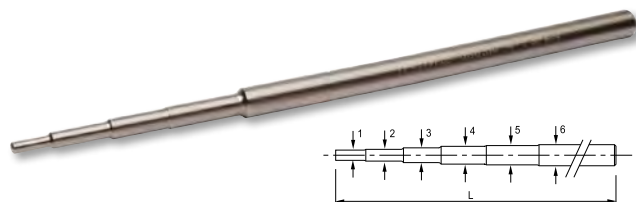

DOUBLE HEAD SOCKET WRENCHES SET



- Material: High performance alloy steel, CrV
- Finish: Chrome-plated matt finished
- From 16 onwards, with hole to locate the stud
- Hardness: 42-48 HRC
- Standards: UNE 16586

056231	1	8	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22 mm					1.150
056271	1	12	6-7, 8-9, 10-11, 12-13, 14-15, 16-17, 18-19, 20-22, 21-23, 24-26, 25-28, 30-32 mm					3.200

- Material: High performance alloy steel, CrV
- Hardness: 42-48 HRC
- Standards: DIN 900

		1	2	3	4	5	6	L mm	g
055301	1	3.1	4.3	5.3	5.8	8	—	6x7 14x15	175 54
055311	1	6.8	7.8	9.8	11.8	12.8	14	16x17 30x32	270 251

3



4



5



6



7



8



9



10



11




12



SLOGGING RING, OPEN END


RING END SLOGGING WRENCHES

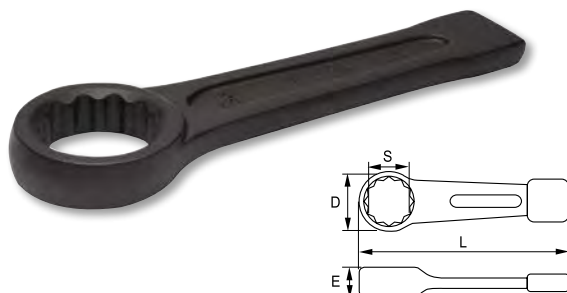

- Material: High performance alloy steel
- Hardness: 24-46 mm - 34-40 HRc and 50-100 mm - 30-36 HRc
- Standards: DIN 7444

		S mm	D mm	E mm	L mm	g
30-24-2	1	24	43	15	165	235
30-27-2	1	27	46	16	180	290
30-30-2	1	30	53	18	195	435
30-32-2	1	32	53	18	195	415
30-34-2	1	34	59	18	205	510
30-36-2	1	36	59	18	205	510
30-38-2	1	38	59	18	205	510
30-41-2	1	41	65	20	230	710
30-46-2	1	46	74	22.5	240	980
30-50-2	1	50	79	24	255	1.050
30-55-2	1	55	86	25	270	1.410
30-60-2	1	60	93	26	280	1.640
30-65-2	1	65	103	29	300	2.180
30-70-2	1	70	109	33	315	2.400
30-75-2	1	75	114	34	330	2.775
30-80-2	1	80	125	36	348	3.150
30-85-2	1	85	129	37	360	4.860
30-90-2	1	90	148	40	379	5.680
30-95-2	1	95	151	41	395	6.500
30-100-2	1	100	154	45	405	7.830

OPEN END SLOGGING WRENCHES

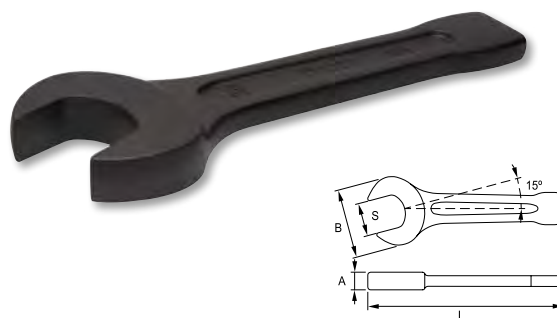

- Material: High performance alloy steel
- Hardness: 30-46 mm - 34-40 HRc and 50-85 mm - 30-36 HRc
- Standards: DIN 133

		S mm	A mm	B mm	L mm	g
31-30-2	1	30	17	65	190	550
31-32-2	1	32	17	67	195	560
31-36-2	1	36	18	77	210	845
31-41-2	1	41	19	88	230	1.040
31-46-2	1	46	20	96	250	1.375
31-50-2	1	50	21	106	275	1.670
31-55-2	1	55	24	116	305	2.175
31-60-2	1	60	24	125	315	2.455
31-65-2	1	65	28	136	345	3.550
31-70-2	1	70	30	148	370	4.075
31-75-2	1	75	30	158	385	5.170
31-80-2	1	80	33	170	400	5.785
31-85-2	1	85	33	174	410	6.870


71-UN7-1





HOOK WRENCHES


HOOK WRENCH

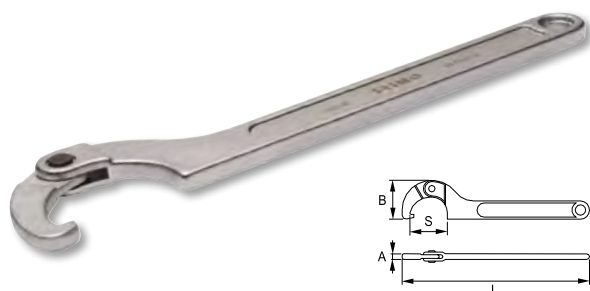

- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40 HRC
- Standards: DIN 137-B

		S mm	A mm	B mm	L mm	g
29-3550-2	1	35-50	6	38	202	186
29-5080-2	1	50-80	8	55	280	382
29-80120-2	1	80-120	9	75	345	642

HOOK WRENCH WITH INTERCHANGEABLE PIN

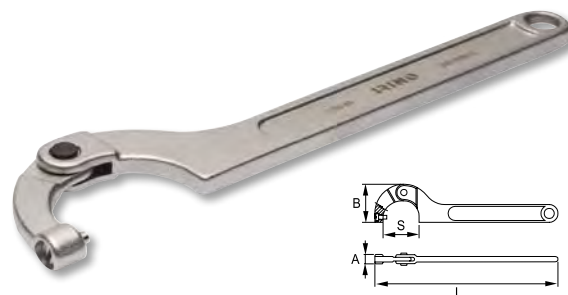

- Material: High performance alloy steel
- Finish: Chrome-plated matt finished
- Hardness: 40 HRC
- Standards: DIN 137-B

		S mm	A mm	B mm	L mm	g
29P-3550-2	1	35-50	11	38	202	186
29P-5080-2	1	50-80	14	55	280	382
29P-80120-2	1	80-120	18	75	345	642

SPARE PART - INTERCHANGEABLE PIN



- Material: High performance alloy steel

			D mm	g
29P-3550-A	1	29P-3550-2	4	5
29P-5080-A	1	29P-5080-2	5	9
29P-80120-A	1	29P-80120-2	6	19

MULTIFITTING KEY

7 IN 1 UNIVERSAL KEY



- Universal key for all common locks
- 1 wrench for 7 different applications
- With radiator aerating key in the central hub
- For electricity, heating, ventilation and air-conditioning systems as well as building construction applications
- Made from zinc die casting, with chain, adaptor and bit (1.2x7 mm & PH2)
- Plastic blister retail packaging

71-UN7-1	1	1.2	PH-2	3-5	9	3-5	72x72	89

9 IN 1 UNIVERSAL KEY



- Universal key for all common locks
- 1 wrench for 9 different applications
- For electricity, heating, ventilation and air-conditioning systems as well as building construction applications
- Made from zinc die casting, with chain, adaptor and bit (1.2x7 mm & PH2)
- Plastic blister retail packaging

71-UN9-1	1	1.2	PH-2	5-7-8	9-10	9-10	90x62	87

3



4



5



6



7



8



9



10



11



12



A full-page photograph of a male mechanic in a black uniform and cap, wearing black gloves, using a torque wrench on a car wheel. The scene is set in a garage with a tiled floor and a diamond-plate metal plate under the wheel. In the background, another person is partially visible. A semi-transparent grey horizontal bar is positioned across the middle of the image, containing the section header text.

03.

TORQUE TOOLS

TORQUE WRENCHES

ADJUSTABLE CLICK WRENCH WITH FIXED RATCHET HEADS



ADJUSTABLE CLICK WRENCH WITH INTERCHANGEABLE HEADS




- Adjustable mechanical clock torque wrench
- Precision: $\pm 4\%$ clockwise
- Fixed ratchet head
- Reversible ratchet with 45 teeth / 8° angle action
- Plastic handle for higher comfort
- Standard: ISO 6789

R			N·m	Δ N·m	mm	kg
070411	1	1/4"	4-20	0.050	275	0.5
070421	1	3/8"	10-60	0.125	360	0.8
070431	1	1/2"	25-125	0.25	420	0.9
070441	1	1/2"	40-200	0.5	460	1.0
070451	1	1/2"	65-335	0.5	520	1.2
070461	1	3/4"	65-335	0.5	520	1.2
070471	1	3/4"	150-800	2	1.040	4.9
070481	1	1"	300-1500	3	1.250	8.2

- Adjustable mechanical click torque wrenches
- Precision: $\pm 4\%$
- 9x12 and 14x18 interchangeable heads
- Plastic handle for higher comfort
- Standard: ISO 6789

R			N·m	Δ N·m	mm	kg
7309-30	1	9x12	6-30	0.050	298	0.6
7309-60	1	9x12	10-60	0.125	367	0.7
7309-125	1	9x12	25-125	0.25	422	0.8
7314-200	1	14x18	40-200	0.5	455	0.9
7314-335	1	14x18	65-335	0.5	515	1.1


9x12 MM OPEN END INSERTS



- Open-end insert heads, 9x12 mm
- High performance alloy steel
- Forged chrome-plated

R		S mm	A mm	B mm	C mm	g
7309-1-10	1	10	25	17.5	5.7	40
7309-1-11	1	11	26	17.5	5.7	40
7309-1-12	1	12	28	17.5	5.7	45
7309-1-13	1	13	29	17.5	5.7	45
7309-1-14	1	14	32	20.0	7.7	50
7309-1-17	1	17	38	20.0	7.7	60
7309-1-19	1	19	42	20.0	7.7	70


9x12 MM RING END INSERTS



- Ring-end insert head, 9x12 mm
- High performance alloy steel
- Forged chrome-plated

R		S mm	A mm	B mm	C mm	g
7309-2-10	1	10	18	17.5	8	40
7309-2-11	1	11	19	17.5	8	40
7309-2-12	1	12	20	17.5	12	50
7309-2-13	1	13	21	17.5	12	50
7309-2-14	1	14	23	17.5	12	50
7309-2-17	1	17	27	17.5	13	50
7309-2-19	1	19	31	17.5	13	60


9x12 & 14x18 MM RATCHET HEAD INSERTS



- 1/4", 3/8" & 1/2" square drive ratchet inserts in 9x12 mm
- 1/2" Square drive ratchet inserts in 14x18 mm
- Teeth number: 45
- Angle action: 8°
- High performance alloy steel
- Forged chrome-plated

R		S	A mm	B mm	C mm	D mm	Max N·m	g
7309-1/4	1	1/4"	37	18	20	9x12	25	135
7309-3/8	1	3/8"	38	18	20	9x12	160	160
7309-1/2	1	1/2"	38	18	20	9x12	160	160
7314-1/2	1	1/2"	40	25	20	14x18	420	265


14x18 MM OPEN END INSERTS



- Open-end insert head, 14x18 mm
- High performance alloy steel
- Forged chrome-plated

R		S mm	A mm	B mm	C mm	g
7314-1-13	1	13	30	25.0	7	130
7314-1-14	1	14	31	25.0	7	130
7314-1-17	1	17	37	25.0	9	135
7314-1-19	1	19	41	25.0	9	140
7314-1-22	1	22	47	25.0	11	170
7314-1-24	1	24	51	25.0	11	180
7314-1-27	1	27	59	32.5	14	220
7314-1-30	1	30	63	32.5	14	240
7314-1-32	1	32	65	32.5	14	240

14x18 MM RING END INSERTS




- Ring-end insert head, 14x18 mm
- High performance alloy steel
- Forged chrome-plated

R		S mm	A mm	B mm	C mm	g
7314-2-13	1	13	21	25	12	120
7314-2-14	1	14	23	25	12	120
7314-2-17	1	17	28	25	13	130
7314-2-19	1	19	30	25	13	140
7314-2-22	1	22	35	25	15	145
7314-2-24	1	24	38	25	15	145
7314-2-27	1	27	42	31	18	170
7314-2-30	1	30	45	31	18	180
7314-2-32	1	32	48	31	18	180
7314-2-36	1	36	53	31	19	205
7314-2-41	1	41	59	31	19	235

03 TORQUE TOOLS

BOLTS AND NUTS. PRE-LOAD AND TORQUE DATA

	coarse pitch	mm	mm	mm	mm²	mm	PROPERTY CLASS. COARSE PITCH											
							4.8		5.8		6.8		8.8		10.9		12.9	
							Pre-load N	Torque N·m	Pre-load N	Torque N·m	Pre-load N	Torque N·m	Pre-load N	Torque N·m	Pre-load N	Torque N·m	Pre-load N	Torque N·m
M2	040	40	15	207	010 014		4480 4495	0.15 0.19	610.6 561.9	0.19 0.23	732.7 674.3	0.23 0.28	976.9 899.0	0.31 0.37	1373.8 1264.3	0.43 0.52	1648.6 1517.1	0.52 0.63
M2.5	045	50	20	3.39	0.10 0.14		813.5 749.9	0.31 0.38	1016.9 937.4	0.39 0.48	1220.2 1124.9	0.47 0.58	1627.0 1499.8	0.63 0.77	2288.0 2109.1	0.88 1.08	2745.6 2531.0	1.06 1.30
M3	050	55	25	5.03	0.10 0.14		1219.9 1125.9	0.54 0.60	1524.9 1407.4	0.68 0.83	1829.9 1688.9	0.82 1.00	2439.9 2251.9	1.09 1.34	3431.0 3166.7	1.53 1.88	4117.2 3800.0	1.84 2.26
M3.5	060	60	—	6.78	0.10 0.14		1638.2 1511.3	0.84 1.03	2047.8 1889.2	1.05 1.28	2457.3 2267.0	1.26 1.54	3276.4 3022.6	1.68 2.05	4607.5 4250.6	2.36 2.89	5528.9 5100.7	2.84 3.47
M4	070	70	30	8.78	0.10 0.14		21154 19509	1.25 1.53	2644.3 2438.7	1.56 1.91	3173.1 2926.4	1.88 2.29	4230.8 3901.9	2.50 3.06	5949.6 5487.0	3.52 4.30	7139.5 6584.4	4.22 5.16
M5	080	80	40	14.20	0.10 0.14		34616 31968	2.46 3.02	4327.0 3996.0	3.08 3.78	5192.3 4795.2	3.70 4.53	6923.1 6393.7	4.93 6.04	9735.7 8991.1	6.93 8.50	11682.8 10789.3	8.32 10.20
M6	100	100	50	20.10	0.10 0.14		48747 44991	4.24 5.19	6093.4 5623.9	5.30 6.48	7312.1 6748.6	6.35 7.78	9749.4 8998.2	8.47 10.37	13710.1 12653.7	11.92 14.59	16452.2 15184.4	14.30 17.51
M7	100	110	—	28.90	0.10 0.14		71345 65996	6.97 8.60	8918.2 8249.5	8.71 10.76	10701.8 9899.4	10.45 12.90	14269.1 13199.2	13.94 17.21	20065.9 18561.4	19.60 24.20	24079.1 22273.6	23.52 29.04
M8	125	130	60	36.60	0.10 0.14		89471 82656	10.20 12.54	11183.9 10332.0	12.75 15.67	13420.7 12398.4	15.30 18.80	17894.2 16531.2	20.41 25.07	25163.7 23247.0	28.70 35.26	30196.5 27896.5	34.44 42.31
M10	150	160	80	58.00	0.10 0.14		142445 131674	20.11 24.76	17805.6 16459.2	25.14 30.95	21366.8 19751.1	30.16 37.14	28489.0 26334.8	40.22 49.52	40062.7 37033.3	56.56 69.64	48075.3 44439.9	67.87 83.56
M12	175	180	100	84.30	0.10 0.14		207666 192040	34.43 42.42	25958.3 24005.0	43.03 53.03	31149.9 28806.0	51.64 63.63	41533.2 38408.0	68.86 84.84	58406.1 54011.2	96.83 119.31	70087.3 64813.5	116.20 143.17
M14	200	210	120	115.00	0.10 0.14		283899 262612	54.77 67.56	35487.4 32826.5	68.46 84.45	42584.9 39391.8	82.15 101.34	56779.8 52522.4	109.53 135.13	79846.6 73859.6	154.03 190.02	95816.0 88631.5	184.84 228.03
M16	200	240	140	157.00	0.10 0.14		392421 363642	85.14 105.80	49052.7 45455.3	106.43 132.26	58863.2 54546.3	127.72 158.71	78484.3 72728.5	170.29 211.61	110368.5 102274.4	239.47 297.58	132442.2 122729.3	287.36 357.09
M18	250	270	140	192.00	0.10 0.14		47533.0 43986.1	117.48 145.16	59416.3 54982.7	146.85 181.45	71299.6 65979.2	176.22 217.74	95066.1 87972.3	234.96 290.32	133686.7 123711.0	330.41 402.26	160424.1 148453.2	396.49 489.92
M20	250	300	170	245.00	0.10 0.14		61238.0 56747.1	166.08 206.39	76547.5 70933.9	207.61 257.98	91857.0 85120.6	249.13 309.58	122476.0 113494.2	332.17 412.78	172231.9 159601.2	467.11 580.47	206678.2 191521.5	560.54 696.56
M22	250	340	170	303.00	0.10 0.14		76305.2 70791.9	227.22 283.79	95381.5 88489.8	284.02 354.74	114457.8 106187.8	340.82 425.69	152610.4 141583.7	454.43 567.58	214608.3 199102.1	639.05 798.16	257530.0 238922.5	766.85 957.80
M24	300	360	190	353.00	0.10 0.14		88232.4 81761.8	287.16 356.84	110290.5 102202.2	358.94 446.05	132348.6 122642.7	430.73 535.26	176646.9 163523.6	574.31 713.68	248153.7 229955.1	807.63 1003.61	297784.4 275961.1	969.15 1204.33
M27	300	410	190	459.00	0.10 0.14		115778.8 107441.5	420.04 525.08	144723.5 134301.9	525.05 656.35	173668.2 161162.2	630.06 787.62	231557.6 214883.0	840.08 1050.16	325627.9 302179.2	1181.36 1476.79	390753.4 362615.0	1417.63 1772.15
M30	350	460	220	561.00	0.10 0.14		140999.5 130770.6	572.83 714.49	176249.4 163463.3	716.03 893.11	211499.3 196155.9	859.24 1071.73	281999.0 261541.2	1145.65 1428.97	396561.1 367792.3	1611.08 2009.49	475873.4 441350.8	1933.29 2411.39
M33	350	500	220	694.00	0.10 0.14		175618.1 163058.0	774.65 970.43	219522.6 203822.5	968.32 1213.03	263427.1 244587.0	1161.98 1455.64	351236.2 326115.9	1549.31 1940.86	493925.8 458600.5	2178.72 2729.33	592711.0 550320.6	2614.46 3275.19
M36	400	550	240	817.00	0.10 0.14		206081.7 191241.8	998.60 1248.41	257602.2 239052.3	1248.25 1560.51	309122.6 286862.7	1497.89 1872.61	412163.5 382483.6	1997.19 2496.81	579604.8 537867.6	2808.55 3511.14	695525.8 645441.1	3370.26 4213.37
M39	400	600	270	976.00	0.10 0.14		247520.0 229902.6	1291.81 1620.96	309400.0 287378.3	1614.77 2026.20	371279.9 344853.9	1937.72 2431.44	495039.9 459805.2	2583.63 3241.92	696149.8 646601.0	3633.23 4558.96	835379.8 775921.3	4359.88 5470.75
M42	450	650	—	1120.00	0.10 0.14		283225.0 262939.0	1601.25 2005.46	354031.2 328673.8	2001.57 2506.83	424837.4 394408.5	2401.88 3008.20	566449.9 525878.0	3202.51 4010.93	796570.1 739516.0	4503.53 5640.37	955884.2 887419.2	5404.23 6768.44
M45	450	700	320	1310.00	0.10 0.14		332751.5 309151.8	2005.51 2519.55	415939.4 386439.7	2506.89 3149.43	499127.3 463727.7	3008.26 3779.32	665503.0 618303.6	4011.02 5039.09	935863.6 869489.3	5640.50 7086.23	1123036.0 1043387.0	6768.60 8503.47
M48	500	750	—	1470.00	0.10 0.14		372429.3 345862.9	2406.51 3018.11	465536.6 432328.7	3008.14 3772.64	558644.0 518794.4	3609.77 4527.17	744858.6 691725.8	4813.03 6036.23	1047457.0 972739.4	6768.32 8488.45	1256949.0 1167287.0	8121.98 10186.14
M52	500	800	360	1760.00	0.10 0.14		448108.9 416499.0	3099.96 3900.52	560136.1 520623.8	3874.95 4875.65	672163.4 624748.5	4649.93 5850.78	896217.8 832998.0	6199.91 7801.04	1260306.0 1171404.0	8718.63 10970.21	1512368.0 1405684.0	10462.36 13164.25
M56	550	850	410	2030.00	0.10 0.14		516202.9 479683.4	3838.14 4824.40	645253.6 599604.2	4797.68 6030.50	774304.4 719525.1	5757.21 7236.60	1032406.0 959366.8	7676.29 9648.80	1451821.0 1349110.0	10794.78 13568.63	1742185.0 1618931.0	12953.73 16282.36
M60	550	900	—	2360.00	0.10 0.14		602498.5 560267.5	4754.64 5992.71	753123.1 700334.4	5943.30 7490.88	903747.8 840401.2	7131.96 8989.06	1204997.0 1120535.0	9509.28 11985.42	1694527.0 1575752.0	13372.43 16854.49	2033432.0 1890903.0	16046.91 20225.39
M64	600	950	460	2680.00	0.10 0.14		683339.5 635299.9	5746.17 7235.13	854174.4 794124.9	7182.71 9043.92	1025009.0 952949.8	8619.25 10852.70	1366679.0 1270600.0	11492.34 14470.27	1921892.0 1786781.0	16161.10 20348.82	2306271.0 2144137.0	19393.32 24418.58
M68	600	1000	—	3060.00	0.10 0.14		782799.9 728201.8	6939.64 8758.24	978499.8 910252.2	8674.55 10947.80	1174200.0 1092303.0	10409.46 13137.36	1565600.0 1456404.0	13879.28 17516.48	2201625.0 2048068.0	19517.74 24632.55	2641950.0 2457681.0	23421.29 29559.06


A close-up photograph of a hand holding a metal socket. Below the hand, a blue plastic tray filled with various sizes of metal sockets is visible. The sockets are arranged in rows, and some are in focus while others are blurred in the background. A yellow horizontal line is positioned above the text.

04.

SOCKETRY

1/4" SOCKETS

1/4" HEXAGONAL SOCKETS




- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124

R			A mm	B mm	C mm	L mm	g
101-04-1	5	4	6.9	9.0	12.0	25.0	11
101-045-1	5	4.5	7.5	9.0	12.0	25.0	11
101-05-1	5	5	8.2	9.0	12.0	25.0	11
101-055-1	5	5.5	8.8	9.0	12.0	25.0	12
101-06-1	5	6	9.4	9.0	12.0	25.0	11
101-07-1	5	7	11.0	9.0	12.0	25.0	13
101-08-1	5	8	12.0	12.0	12.0	25.0	13
101-09-1	5	9	13.0	12.0	13.0	25.0	15
101-10-1	5	10	14.0	12.0	12.6	25.0	21
101-11-1	5	11	16.0	12.0	14.0	25.0	24
101-12-1	5	12	17.0	12.0	14.8	25.0	26
101-13-1	5	13	18.0	12.0	15.8	25.0	28
101-14-1	5	14	20.0	12.0	17.4	25.0	39




R			A mm	B mm	C mm	L mm	g
101A-05-1	5	5/32"	6.9	8.5	12.0	25.0	10
101A-06-1	5	3/16"	7.5	8.5	12.0	25.0	10
101A-07-1	5	7/32"	8.8	9.5	12.0	25.0	11
101A-08-1	5	1/4"	9.4	9.5	12.0	25.0	11
101A-09-1	5	9/32"	11.0	10.5	12.0	25.0	13
101A-10-1	5	5/16"	12.0	10.5	12.0	25.0	12
101A-11-1	5	11/32"	13.0	10.5	12.0	25.0	14
101A-12-1	5	3/8"	14.0	10.5	12.6	25.0	18
101A-14-1	5	7/16"	16.0	11.5	14.0	25.0	23
101A-16-1	5	1/2"	18.0	11.5	15.8	25.0	29
101A-18-1	5	9/16"	20.0	11.5	17.4	25.0	37

1/4" SOCKETS, TORX®



1/4" DEEP HEXAGONAL SOCKETS



- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124

R			A mm	B mm	C mm	L mm	g
103-04-1	5	4	6.9	12.0	12.0	50.0	21
103-045-1	5	4.5	7.5	12.0	12.0	50.0	20
103-05-1	5	5	8.2	12.0	12.0	50.0	21
103-055-1	5	5.5	8.8	12.0	12.0	50.0	22
103-06-1	5	6	9.4	12.0	12.0	50.0	22
103-07-1	5	7	11.0	24.0	12.0	50.0	26
103-08-1	5	8	12.0	24.0	10.9	50.0	29
103-09-1	5	9	13.0	24.0	11.6	50.0	30
103-10-1	5	10	14.0	24.0	13.0	50.0	39
103-11-1	5	11	16.0	24.0	14.2	50.0	44
103-12-1	5	12	17.0	24.0	15.0	50.0	49
103-13-1	5	13	18.0	24.0	16.0	50.0	55
103-14-1	5	14	20.0	24.0	17.0	50.0	65



R			A mm	B mm	C mm	L mm	g
103A-06-1	5	3/16"	8.2	12.0	12.0	50.0	21
103A-08-1	5	1/4"	9.7	12.0	12.0	50.0	22
103A-09-1	5	9/32"	11.2	24.0	12.0	50.0	26
103A-10-1	5	5/16"	12.0	24.0	12.0	50.0	29
103A-11-1	5	11/32"	13.0	24.0	12.0	50.0	30
103A-12-1	5	3/8"	13.7	24.0	12.0	50.0	39
103A-14-1	5	7/16"	16.1	24.0	14.2	50.0	44
103A-16-1	5	1/2"	18.0	24.0	16.0	50.0	55

- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standard: DIN 3120

R			S mm	A mm	B mm	L mm	g
106-04-1	5	E-4	3.8	6.0	12.0	25.0	10
106-05-1	5	E-5	4.7	7.0	12.0	25.0	11
106-06-1	5	E-6	5.7	8.0	12.0	25.0	11
106-07-1	5	E-7	6.2	8.6	12.0	25.0	11
106-08-1	5	E-8	7.5	10.3	12.0	25.0	12
106-10-1	5	E-10	9.4	12.3	13.0	25.0	21

1/4" BIT DRIVERS

1/4" BIT DRIVER, SLOTTED



- Bit made with S2 special steel
- Slotted
- Standard: DIN 3120

Q			A mm	B mm	L mm	g
107-0840-1	5	0.8 x 4	11.8	20.0	37.5	15
107-1055-1	5	1 x 5.5	11.8	20.0	37.5	15
107-1280-1	5	1.2 x 8	11.8	20.0	37.5	16

1/4" BIT DRIVER, PHILLIPS



- Bit made with S2 special steel
- Phillips bit driver
- Standard: DIN 3120

Q			A mm	B mm	L mm	g
107-PH1-1	5	PH-1	11.8	20.0	37.5	15
107-PH2-1	5	PH-2	11.8	20.0	37.5	15
107-PH3-1	5	PH-3	11.8	20.0	37.5	16

1/4" BIT DRIVER, POZIDRIV



- Bit made with S2 special steel
- Pozidriv bit driver
- Standard: DIN 3120

Q			A mm	B mm	L mm	g
107-PZ1-1	5	PZ-1	11.8	20.0	37.5	15
107-PZ2-1	5	PZ-2	11.8	20.0	37.5	15
107-PZ3-1	5	PZ-3	11.8	20.0	37.5	16

1/4" BIT DRIVER, HEXAGONAL



- Bit made with S2 special steel
- Hexagonal bit driver
- Standard: DIN 3120

Q			A mm	B mm	L mm	g
107-H3-1	5	3	11.8	20.0	37.5	15
107-H4-1	5	4	11.8	20.0	37.5	15
107-H5-1	5	5	11.8	20.0	37.5	16
107-H6-1	5	6	11.8	20.0	37.5	17
107-H8-1	5	8	11.8	20.0	37.5	19

Q			A mm	B mm	L mm	g
107A-4-1	5	1/8"	11.8	20.0	37.5	15
107A-5-1	5	5/32"	11.8	20.0	37.5	15
107A-6-1	5	3/16"	11.8	20.0	37.5	16
107A-7-1	5	7/32"	11.8	20.0	37.5	17

1/4" BIT DRIVER, TORX®




- Bit made with S2 special steel
- TORX® bit driver
- Standard: DIN 3120

Q			S mm	A mm	C mm	L mm	g
107-T08-1	5	T8	2.3	11.8	20.0	37.5	15
107-T09-1	5	T9	2.5	11.8	20.0	37.5	15
107-T10-1	5	T10	2.7	11.8	20.0	37.5	15
107-T15-1	5	T15	3.3	11.8	20.0	37.5	15
107-T20-1	5	T20	3.8	11.8	20.0	37.5	15
107-T25-1	5	T25	4.4	11.8	20.0	37.5	15
107-T27-1	5	T27	5.0	11.8	20.0	37.5	16
107-T30-1	5	T30	5.5	11.8	20.0	37.5	16
107-T40-1	5	T40	6.6	11.8	20.0	37.5	16

1/4" ACCESSORIES


1/4" REVERSIBLE RATCHET

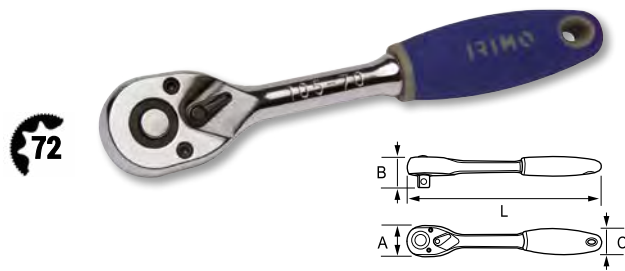

- 72 teeth / 5° action
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Quick release
- 2-component handle
- Cushion thermo rubber grip
- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	L mm	G
105-70-1	5	28	25	23	152	151

1/4" REVERSIBLE RATCHET

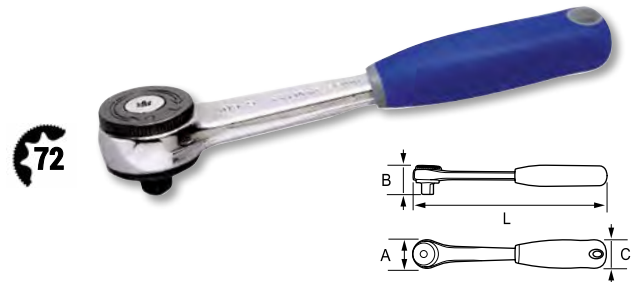

- 72 teeth / 5° action
- High performance alloy steel
- Chrome-plated high polished finish
- 2-component handle
- Cushion thermo rubber grip
- Standards: DIN 3122, DIN 3120, ISO 3315, UNE 16512
- * 105711 Repair Kit

		A mm	B mm	C mm	L mm	G
105501	1	25	23	21	122	150



RATCHET EXHIBITOR WITH 12 1/4" RATCHETS



- Reversible ratchet
- 72 teeth / 5° action
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Quick release
- 2-component handle
- Cushion thermo rubber grip
- Standard: DIN 3122, DIN 3120
- * Use part number 105-70-1 to order individual ratchets

105-70-12DISP	1	12	160x150x230	2.590

1/4" HEXAGONAL SOCKET SET IN RAIL, 11 pieces



- 1/4" Socket set in display
- 11 pcs socket set
- Hexagonal sockets, metric sizes
- Chrome plated bright finish
- Standard: DIN 3120, DIN 3124, DIN 3122
- Hang sell presentation

109-11-4	5	11	232x60x15	250

101-04-1, 101-05-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1



1/4" SLIDING T-HANDLE



- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	L mm	 9
105-42-1	5	13.5	6.0	24	115	45

1/4" SOCKET SET, HEXAGONAL AND METRIC




- 13 pcs, 1/4" drive socket set
- Hexagonal sockets, metric sizes
- Chrome plated bright finish
- Standard: DIN 3120, DIN 3124, DIN 3122
- Hang sell presentation
- * Counter display when ordering 12 pieces

109-13-4	8	13	254x70x30	460

105-70-1		105-24-1	
101-04-1, 101-05-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1			

1/4" FLEXIBLE EXTENSION

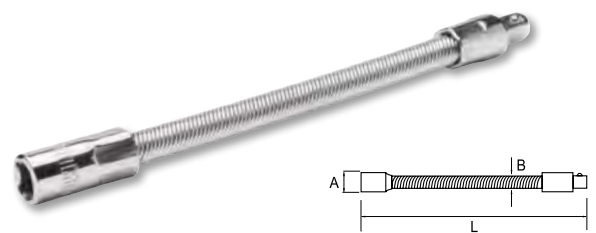

- Standard: DIN 3120

		A mm	B mm	L mm	
105-28-1	5	12.5	8	148	57

1/4" ACCESSORIES


1/4" EXTENSIONS



- Standards: DIN 3120, DIN 3122

R		A mm	B mm	L mm	g
105-22-1	5	8.1	12.2	50	20
105-24-1	5	8.1	12.2	100	38
105-26-1	5	8.1	12.2	150	65


1/4" SPINNER HANDLE

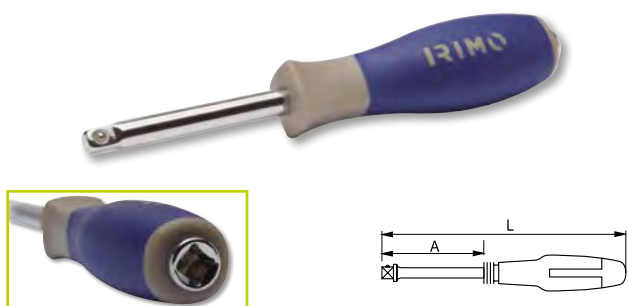

- Female 1/4" square in the head
- Standard: DIN 3120

R		A mm	L mm	1/4"	1/4"	g
105-50-1	5	61	150	1/4"	1/4"	88


1/4"-3/8" INCREASING ADAPTOR

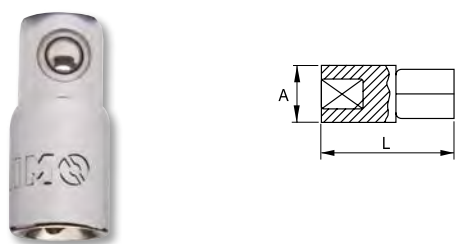

- Increasing adaptor 1/4" to 3/8"
- Standards: DIN 3120, DIN 3122

R		A mm	L mm	g
105-46-1	5	12.0	26.0	31

1/4" UNIVERSAL JOINT

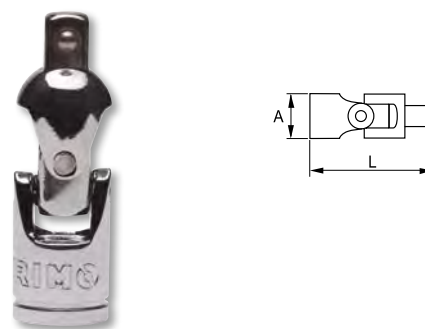

- Standards: DIN 3120, DIN 3122

R		A mm	L mm	g
105-40-1	5	13.8	38.0	27

1/4" BIT HOLDER



- 1/4" female square to 1/4" female hex
- Standard: DIN 3120

R		A mm	L mm	g
105-48-1	5	11.9	25.0	12

Super Compact Small & Handy



- 1/4" hexagonal socket and bit handy set, 37 pcs
- Bit holder with swiveling system for easy Access
- Handy reversible ratchet of 72 teeth.
Length 105 mm
- Bimaterial handles
- Bright chrome plated finish
- DIN 3120 and DIN 3124



x10	1/4"	5.5-6-7-8-9-10-11-12-13-14 mm	
x1	72	1/4"	x2 1/4" 50-100 mm
x1	1/4"		x1 1/4"
x22	1/4"		
(3x)	①	SL4-5-6	(3x) ⚙️ PZ1-2-3
(5x)	●	H3-4-5-6-7	(3x) ⚙️ PH1-2-3
(7x)	⚙️	T10-15-20-25-27-30-40	(1x) ⚙️ 1/4"

109-37-4	1	45x100x150	780
----------	---	------------	-----

1/4" SOCKET AND BIT SET

1/4" mm

x 23



- 1/4" 23 pcs socket and bit set DIN 3120 and DIN 3124
- Ratchet torque according to DIN 3122
- Special bit ratchet hex 1/4" drive; Reversible; 60 teeth; L= 90 mm
- Bimaterial ratchet handle
- ABS plastic box
- Includes belt clip
- Ratchet is sold as a spare part: SP121

109-23-4	1	110x75x45	340
101-06-1, 101-07-1, 101-08-1, 101-10-1, 101-11-1, 101-13-1	1/4"		
475A-25-1	⚙️		
475-PH1-1, 475-PH2-1	⚙️		
475-PZ1-1, 475-PZ2-1	⚙️		
475-4-1, 475-6-0-1	①		
475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1	●		
475-T10-1, 475-T15-1, 475-T20-1, 475-T25-1, 475-T30-1	⚙️		
SP121	⚙️		

1/4" SOCKET SET, HEXAGONAL AND METRIC

1/4" mm

x 19



- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene

109-19-4	10	260x185x55	1.100
105-40-1	⚙️	105-70-1	⚙️
105-42-1	⚙️	105-50-1	⚙️
105-22-1	⚙️	105-26-1	⚙️
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1	1/4"		

1/4" SOCKET SETS

1/4" SOCKET SET, HEXAGONAL AND METRIC

1/4"

mm

x 35



- 35 pcs socket set
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene


R	Box	Dimensions	Weight
109-35-4	1	250 x 170 x 60	1.200
105-48-1		105-70-1	
105-42-1		105-50-1	
105-22-1		105-40-1	
105-24-1			
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1			
040001, 040011, 040021			
475-PH1-1, 475-PH2-1, 475-PH3-1			
475-PZ1-1, 475-PZ2-1, 475-PZ3-1			
475-4-1, 475-6.0-1			
475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1			

3/8" SOCKETS

3/8" HEXAGONAL SOCKETS

6


mm



- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124

R	Box	Hex	A mm	B mm	C mm	L mm	g
112-06-1	5	6	10.5	9.0	17.0	28.0	21
112-07-1	5	7	11.0	9.0	17.0	28.0	24
112-08-1	5	8	12.2	9.0	17.0	28.0	27
112-09-1	5	9	13.5	9.0	17.0	28.0	26
112-10-1	5	10	14.7	9.0	17.0	28.0	24
112-11-1	5	11	16.0	9.0	17.0	28.0	26
112-12-1	5	12	18.0	15.0	17.0	28.0	24
112-13-1	5	13	19.0	15.0	17.0	28.0	29
112-14-1	5	14	20.0	15.0	17.7	28.0	38
112-15-1	5	15	22.0	15.0	17.9	28.0	40
112-16-1	5	16	22.0	15.0	17.9	28.0	46
112-17-1	5	17	24.0	15.0	18.8	30.0	56
112-18-1	5	18	26.0	15.0	19.8	30.0	75
112-19-1	5	19	26.0	15.0	20.7	30.0	66
112-20-1	5	20	28.0	15.0	21.8	30.0	88
112-21-1	5	21	28.0	15.0	21.8	30.0	84
112-22-1	5	22	30.0	15.0	22.8	32.0	104

3/8" HEXAGONAL DEEP SOCKETS





- Deep sockets
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standard: DIN 3120

			A mm	B mm	C mm	L mm	
113-07-1	5	7	11.0	16.0	17.0	64.0	45
113-08-1	5	8	12.2	16.0	17.0	64.0	49
113-09-1	5	9	13.5	16.0	17.0	64.0	53
113-10-1	5	10	14.7	16.0	17.0	64.0	60
113-11-1	5	11	17.0	29.0	16.0	64.0	61
113-12-1	5	12	18.0	29.0	17.2	64.0	63
113-13-1	5	13	19.0	29.0	16.8	64.0	75
113-14-1	5	14	20.0	29.0	17.8	64.0	81
113-16-1	5	16	22.0	29.0	18.0	64.0	98
113-17-1	5	17	24.0	29.0	18.9	64.0	123
113-19-1	5	19	26.0	29.0	20.8	64.0	145

3/8" ACCESSORIES



3/8" REVERSIBLE RATCHET

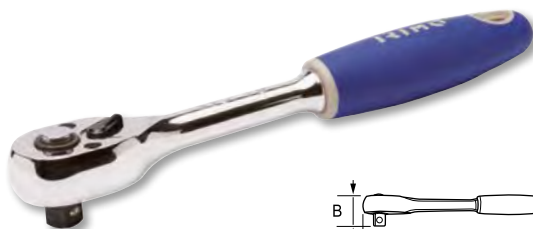

- 72 teeth / 5° action
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Quick release
- 2-component handle
- Cushion thermo rubber grip
- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	L mm	
115-70-1	5	33	33	32	202	341

3/8" REVERSIBLE RATCHET

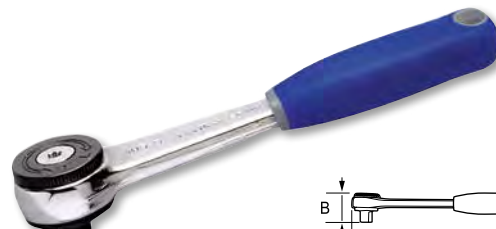


- 72 teeth / 5° action
- High performance alloy steel
- Chrome-plated high polished finish
- 2-component handle
- Cushion thermo rubber grip
- Standards: DIN 3122, DIN 3120, ISO 3315, UNE 16512
- * 115701 Repair Kit

		A mm	B mm	C mm	L mm	
115501	1	29	30	24	197	230

3/8" ACCESSORIES


3/8" EXTENSIONS



- Standards: DIN 3120, DIN 3122

		A mm	B mm	L mm	g
115-20-1	5	17.0	12.1	75	125
115-22-1	5	17.0	12.1	150	138
115-24-1	5	17.0	12.1	250	232


3/8" SLIDING T-HANDLE



- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	L mm	g
115-42-1	5	17.5	8.5	35	152	114


3/8" T-HANDLE HEAD



- Sliding T handle head
- Standard: DIN 3120

		A mm	C mm	g
115-43-1	5	24.0	40.5	30


3/8" UNIVERSAL JOINT



- Standards: DIN 3120, DIN 3122

		A mm	L mm	g
115-40-1	5	17.8	59.0	61


3/8"-1/4" REDUCING ADAPTOR



- Reducing adaptor 3/8" to 1/4"
- Standard: DIN 3120

		A mm	L mm	g
115-46-1	5	16.0	25.0	17


3/8"-1/2" INCREASING ADAPTOR



- Increasing adaptor 3/8" to 1/2"
- Standard: DIN 3120

		A mm	L mm	g
115-44-1	5	18.0	35.5	45

3/8" BIT HOLDER



- 3/8" female square to 5/16" female hex
- Standard: DIN 3120

			A mm	L mm	g
115-48-1	5	5/16"	15.4	28.0	24

3/8" SOCKET SET

3/8" SOCKET SET, HEXAGONAL AND METRIC



x 18




- 3/8" Socket set, 18 pcs
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene

			g
119-18-4	1	320x250x75	3.250
112-07-1, 112-08-1, 112-10-1, 112-11-1, 112-12-1, 112-13-1, 112-14-1, 112-15-1, 112-16-1, 112-17-1, 112-19-1, 112-21-1, 112-22-1			
115-70-1			
115-20-1, 115-22-1			
115-40-1			
115-43-1			

1/2" SOCKETS

1/2" HEXAGONAL SOCKETS

6 mm




- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124

Part No.	5	8	A mm	B mm	C mm	L mm	g
121-08-1	5	8	14.8	13.0	22.0	38.0	50
121-09-1	5	9	15.3	13.0	22.0	38.0	48
121-10-1	5	10	15.3	13.0	22.0	38.0	49
121-11-1	5	11	16.5	13.0	22.0	38.0	50
121-12-1	5	12	17.8	13.0	22.0	38.0	52
121-13-1	5	13	19.0	13.0	22.0	38.0	54
121-14-1	5	14	20.3	13.0	22.0	38.0	56
121-15-1	5	15	22.0	17.8	20.5	38.0	57
121-16-1	5	16	22.0	17.8	20.5	38.0	71
121-17-1	5	17	24.0	17.8	21.9	38.0	72
121-18-1	5	18	25.0	17.8	22.9	38.0	90
121-19-1	5	19	26.0	17.8	22.9	38.0	84
121-20-1	5	20	28.0	17.8	23.9	38.0	87
121-21-1	5	21	28.0	17.8	23.9	38.0	95
121-22-1	5	22	30.0	17.8	26.1	38.0	97
121-23-1	5	23	32.0	17.8	28.1	38.0	103
121-24-1	5	24	32.0	17.8	28.1	38.0	109
121-25-1	5	25	34.0	17.8	29.1	40.0	146
121-26-1	5	26	34.0	17.8	29.1	42.0	192
121-27-1	5	27	36.0	17.8	30.1	42.0	211
121-28-1	5	28	38.0	17.8	32.1	42.0	212
121-30-1	5	30	40.0	17.8	34.1	44.0	214
121-32-1	5	32	42.0	17.8	36.1	44.0	217
121-34-1	5	34	50.0	18.0	38.0	44.0	260
121-36-1	5	36	52.0	18.2	40.0	45.0	300

1/2" BIHEXAGONAL SOCKETS

12 mm



- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124


Part No.	5	8	A mm	B mm	C mm	L mm	g
122-08-1	5	8	14.8	13.0	22.0	38.0	50
122-09-1	5	9	15.3	13.0	22.0	38.0	48
122-10-1	5	10	15.3	13.0	22.0	38.0	49
122-11-1	5	11	16.5	13.0	22.0	38.0	50
122-12-1	5	12	17.8	13.0	22.0	38.0	52
122-13-1	5	13	19.0	13.0	22.0	38.0	54
122-14-1	5	14	20.3	13.0	22.0	38.0	56
122-15-1	5	15	22.0	17.8	20.5	38.0	57
122-16-1	5	16	22.0	17.8	20.5	38.0	71
122-17-1	5	17	24.0	17.8	21.9	38.0	72
122-18-1	5	18	25.0	17.8	22.9	38.0	90
122-19-1	5	19	26.0	17.8	22.9	38.0	84
122-20-1	5	20	28.0	17.8	23.9	38.0	87
122-21-1	5	21	28.0	17.8	23.9	38.0	95
122-22-1	5	22	30.0	17.8	26.1	38.0	97
122-23-1	5	23	32.0	17.8	28.1	38.0	103
122-24-1	5	24	32.0	17.8	28.1	38.0	109
122-27-1	5	27	36.0	17.8	30.1	42.0	211
122-30-1	5	30	40.0	17.8	34.1	44.0	214
122-32-1	5	32	42.0	17.8	36.1	44.0	217
122-34-1	5	34	44.0	17.8	37.1	45.0	220
122-36-1	5	36	44.0	17.8	38.1	44.0	220

12 in

Part No.	5	5/16"	A mm	B mm	C mm	L mm	g
122A-10-1	5	5/16"	14.8	13.0	22.0	38.0	50
122A-11-1	5	11/32"	15.3	13.0	22.0	38.0	48
122A-12-1	5	3/8"	15.5	13.0	22.0	38.0	45
122A-14-1	5	7/16"	16.7	13.0	22.0	38.0	49
122A-16-1	5	1/2"	19.2	13.0	22.0	38.0	54
122A-18-1	5	9/16"	20.5	13.0	22.0	38.0	55
122A-20-1	5	5/8"	22.0	17.8	20.6	38.0	69
122A-22-1	5	11/16"	24.0	17.8	21.9	38.0	71
122A-24-1	5	3/4"	26.0	17.8	22.9	38.0	75
122A-26-1	5	13/16"	28.0	17.8	23.9	38.0	76
122A-28-1	5	7/8"	30.0	17.8	26.1	38.0	88
122A-30-1	5	15/16"	32.0	17.8	28.1	38.0	104
122A-34-1	5	1.1/16"	36.0	17.8	30.1	42.0	141
122A-38-1	5	1.3/16"	40.0	17.8	34.1	44.0	214
122A-40-1	5	1.1/4"	42.0	17.8	36.1	44.0	233

1/2" SQUARE DRIVE DEEP SOCKETS WITH METRIC HEX PROFILE


6 mm



- 1/2" Deep sockets, Hexagonal, sizes in mm
- Chrome vanadium alloy steel
- Knurled shank for finger turning of free running fasteners
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124

			A mm	B mm	C mm	L mm	g
123-10-1	5	10	15.3	27.0	22.0	78.0	78
123-12-1	5	12	17.8	27.0	22.0	78.0	103
123-13-1	5	13	19.0	27.0	22.0	78.0	108
123-14-1	5	14	20.3	27.0	22.0	78.0	109
123-15-1	5	15	22.0	31.0	22.0	78.0	113
123-16-1	5	16	22.0	31.0	22.0	78.0	115
123-17-1	5	17	24.0	31.0	22.0	78.0	123
123-18-1	5	18	25.0	31.0	22.8	78.0	149
123-19-1	5	19	26.0	31.0	22.8	78.0	138
123-21-1	5	21	28.0	31.0	23.8	78.0	151
123-22-1	5	22	30.0	31.0	26.0	78.0	190
123-24-1	5	24	32.0	31.0	28.0	78.0	220

1/2" SOCKETS, TORX®




- Standard: DIN 3120

			S mm	A mm	C mm	L mm	g
126-10-1	5	E-10	9.4	14.7	22.0	38.0	55
126-11-1	5	E-11	10.0	15.2	22.0	38.0	53
126-12-1	5	E-12	11.1	16.0	22.0	38.0	57
126-14-1	5	E-14	12.9	17.0	22.0	38.0	59
126-16-1	5	E-16	14.7	22.0	20.1	38.0	65
126-18-1	5	E-18	16.6	24.0	21.8	38.0	77
126-20-1	5	E-20	18.4	24.0	21.8	38.0	73
126-24-1	5	E-24	22.1	28.0	23.8	38.0	110

1/2" BIHEXAGONAL DEEP SOCKETS

12 mm



- 1/2" Sockets, long
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124


			A mm	B mm	C mm	L mm	g
124-10-1	5	10	15.3	27.0	22.0	78.0	78
124-11-1	5	11	16.5	27.0	22.0	78.0	86
124-12-1	5	12	17.8	27.0	22.0	78.0	103
124-13-1	5	13	19.0	27.0	22.0	78.0	108
124-14-1	5	14	20.3	27.0	22.0	78.0	109
124-15-1	5	15	22.0	31.0	22.0	78.0	113
124-16-1	5	16	22.0	31.0	22.0	78.0	115
124-17-1	5	17	24.0	31.0	22.0	78.0	123
124-18-1	5	18	25.0	31.0	22.8	78.0	149
124-19-1	5	19	26.0	31.0	22.8	78.0	135
124-21-1	5	21	28.0	31.0	23.8	78.0	151
124-22-1	5	22	30.0	31.0	26.0	78.0	190
124-24-1	5	24	32.0	31.0	28.0	78.0	220
124-27-1	5	27	36.0	31.0	30.0	78.0	250
124-30-1	5	30	40.0	31.0	34.0	78.0	341
124-32-1	5	32	42.0	31.0	36.0	78.0	382

12 in

			A mm	B mm	C mm	L mm	g
124A-18-1	5	9/16"	22.0	31.0	22.0	78.0	113
124A-20-1	5	5/8"	22.0	31.0	22.0	78.0	115
124A-22-1	5	11/16"	25.0	31.0	22.8	78.0	149
124A-24-1	5	3/4"	26.0	31.0	22.8	78.0	135
124A-26-1	5	13/16"	28.0	31.0	23.8	78.0	151

1/2" BIT DRIVERS


1/2" BIT DRIVER, HEXAGONAL



- Hexagonal bit driver
- Standard: DIN 3120 / ISO 1174

Q			A mm	B mm	L mm	g
180-04-1	5	4	21.8	22	60	70
180-05-1	5	5	21.8	22	60	71
180-06-1	5	6	21.8	22	60	72
180-07-1	5	7	21.8	22	60	72
180-08-1	5	8	21.8	22	60	73
180-10-1	5	10	21.8	22	60	81
180-12-1	5	12	21.8	22	60	89
180-14-1	5	14	21.8	22	60	96
180-17-1	5	17	23.8	22	60	100
180-19-1	5	19	23.8	22	60	100
Q			A mm	B mm	L mm	g
180-05X-1	5	5	21.8	62	100	89
180-06X-1	5	6	21.8	62	100	90
180-07X-1	5	7	21.8	62	100	91
180-08X-1	5	8	21.8	62	100	91
180-10X-1	5	10	21.8	62	100	109
180-12X-1	5	12	21.8	62	100	130

1/2" BIT DRIVER, TORX®



- TORX® Bit driver
- Standard: DIN 3120 / ISO 1174

Q			S mm	A mm	B mm	L mm	g
183-20-1	5	T20	3.84	21.8	22	60	69
183-25-1	5	T25	4.40	21.8	22	60	69
183-27-1	5	T27	4.96	21.8	22	60	70
183-30-1	5	T30	5.49	21.8	22	60	70
183-40-1	5	T40	6.60	21.8	22	60	70
183-45-1	5	T45	7.77	21.8	22	60	70
183-50-1	5	T50	8.79	21.8	22	60	71
183-55-1	5	T55	11.17	21.8	22	60	76
183-60-1	5	T60	13.20	21.8	22	60	81
Q			S mm	A mm	B mm	L mm	g
183-40X-1	5	T40	6.60	21.8	82	120	95
183-45X-1	5	T45	7.77	21.8	82	120	96
183-50X-1	5	T50	8.79	21.8	82	120	98
183-55X-1	5	T55	11.17	21.8	102	140	117

1/2" HEX BIT DRIVERS SOCKET SET


x 9



- 9 pcs bit driver set 1/2"
- Metric hexagonal bits
- Bright chrome socket
- Black finish bit
- Standard: DIN 3120 / ISO 1174
- Box in high density polyethylene

Q			g
129-9H-4	1	55x200x160	1.080

180-04-1, 180-05-1, 180-06-1, 180-07-1, 180-08-1, 180-10-1, 180-12-1, 180-14-1, 180-17-1



1/2" TORX® BIT DRIVER SOCKET SET

x 9



- 9 pcs bit driver set 1/2"
- TORX® bits
- Bright chrome socket
- Black finish bit
- Standard: DIN 3120 / ISO 1174
- Box in high density polyethylene

Q			g
129-9T-4	1	55x200x160	1.140

183-20-1, 183-25-1, 183-27-1, 183-30-1, 183-40-1, 183-45-1, 183-50-1, 183-55-1, 183-60-1



1/2" BIT DRIVER, XZN



- XZN Bit driver
- Standard: DIN 3120 / ISO 1174

			A mm	B mm	L mm	g
185-05-1	5	M 5	21.8	22	60	67
185-06-1	5	M 6	21.8	22	60	69
185-08-1	5	M 8	21.8	22	60	69
185-10-1	5	M 10	21.8	22	60	77
185-12-1	5	M 12	21.8	22	60	85
185-14-1	5	M 14	21.8	22	60	90
185-16-1	5	M 16	21.8	22	60	95
			A mm	B mm	L mm	g
185-06X-1	5	M 6	21.8	62	100	87
185-08X-1	5	M 8	21.8	62	100	89
185-10X-1	5	M 10	21.8	62	100	105
185-12X-1	5	M 12	21.8	62	100	123


1/2" SOCKET DRIVERS FOR TORX® TAMPER SCREWS



- 1/2" socket drivers for TORX® tamper screws
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

				L mm	L1 mm	g
T49T30XL	1	TR30	1/2"	200	160	122
T49T40XL	1	TR40	1/2"	200	160	123
T49T45XL	1	TR45	1/2"	200	160	125
T49T70HL	1	TR70	1/2"	100	60	167
T49T80HL	1	TR80	1/2"	100	30	163


1/2" ACCESSORIES



- 72 teeth / 5° action
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Quick release
- 2-component handle
- Cushion thermo rubber grip
- Standard: DIN 3122, DIN 3120

		A mm	B mm	C mm	L mm	g
125-70-1	5	42	41	36	262	591

1/2" REVERSIBLE RATCHET



- 72 teeth / 5° action
- High performance alloy steel
- Chrome-plated high polished finish
- 2-component handle
- Cushion thermo rubber grip
- Standards: DIN 3122, DIN 3120, ISO 3315, UNE 16512
- * 125701 Repair Kit

		A mm	B mm	C mm	L mm	g
125501	1	39	41	30	251	614

1/2" ACCESSORIES


RATCHET EXHIBITOR WITH 12 1/2" RATCHETS



- Reversible ratchet
- 72 teeth / 5° action
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Quick release
- 2-component handle
- Cushion thermo rubber grip
- Standard: DIN 3122, DIN 3120
- * Use part number 125-70-1 to order individual ratchets

125-70-12DISP	1	12	225x295x220	7.852

1/2" HEXAGONAL SOCKET SET IN RAIL, 10 pieces

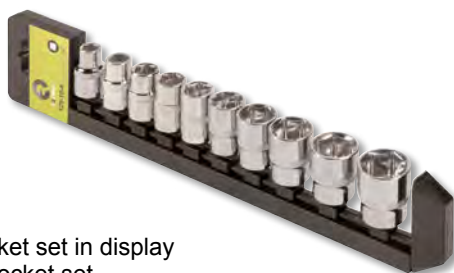

- 1/2" Socket set in display
- 10 pcs socket set
- Hexagonal sockets, metric sizes
- Chrome plated bright finish
- Standard: DIN 3120, DIN 3124, DIN 3122
- Hang sell presentation

129-10-4	5	10	360x90x15	800

121-10-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-21-1, 121-22-1, 121-24-1



1/2" SOCKET SET, HEXAGONAL AND METRIC




- 12 pcs socket set
- Hexagonal sockets, metric sizes
- Chrome plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Hang sell presentation
- * **Counter display when ordering 8 pieces**

129-12-4	8	12	330x100x50	1.600

125-70-1		125-23-1	
121-10-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-21-1, 121-22-1, 121-24-1			


1/2" EXTENSIONS



- Standards: DIN 3120, DIN 3122

		A mm	B mm	L mm	
125-22-1	5	22.4	15.7	75	120
125-23-1	5	22.4	15.7	125	193
125-25-1	5	22.4	15.7	250	380


1/2" SWIVEL HANDLE



- Standard: DIN 3120

		A mm	B mm	C mm	L' mm	L mm	
125-52-1	5	35	12	40	375	355.0	692


1/2" SPEED BRACE



- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	E mm	L mm	
125-49-1	5	31.0	12.7	75	152	420	575

1/2" SLIDING T-HANDLE

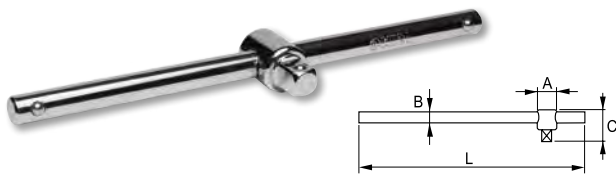

- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	L mm	g
125-42-1	5	23.5	13.5	45	250	272


1/2"-3/8" REDUCING ADAPTOR



- Reducing adaptor 1/2" to 3/8"
- Standards: DIN 3120, DIN 3122

		A mm	L mm	g
125-46-1	5	22.0	35.5	45

1/2" L-HANDLE

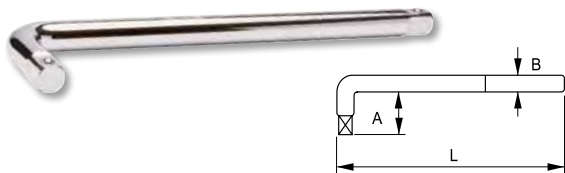

- Standards: DIN 3120, DIN 3122

		A mm	B mm	L mm	g
125-60-1	5	46	14	250	456


1/2" UNIVERSAL JOINT



- Standards: DIN 3120, DIN 3122

		A mm	L mm	g
125-40-1	5	23.8	72.0	146

1/2" T-HANDLE HEAD

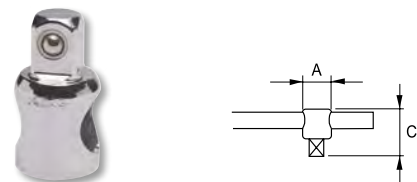

- Sliding T handle head
- Standard: DIN 3120

		A mm	C mm	g
125-43-1	5	24.0	44	73


1/2"-3/4" INCREASING ADAPTOR



- Increasing adaptor 1/2" to 3/4"
- Standards: DIN 3120, DIN 3122


		A mm	L mm	g
125-44-1	5	25.0	50.0	140

1/2" SPARK PLUG SOCKET

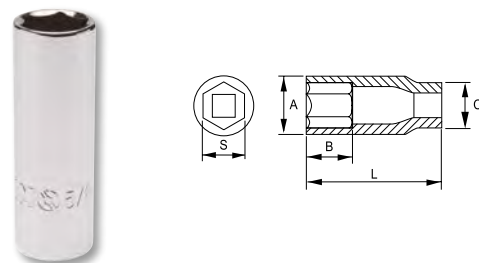


		S mm	A mm	B mm	C mm	L mm	g
125-53-1	5	5/8" - 16	22.0	32.0	22.0	65.0	90
125-54-1	5	13/16" - 21	28.0	31.0	24.0	65.0	146

1/2" BIT HOLDER

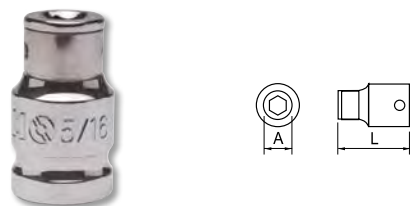

- 1/2" female square to 5/16" female hex
- Standard: DIN 3120

			A mm	L mm	
125-48-1	5	5/16"	17.0	38.5	56

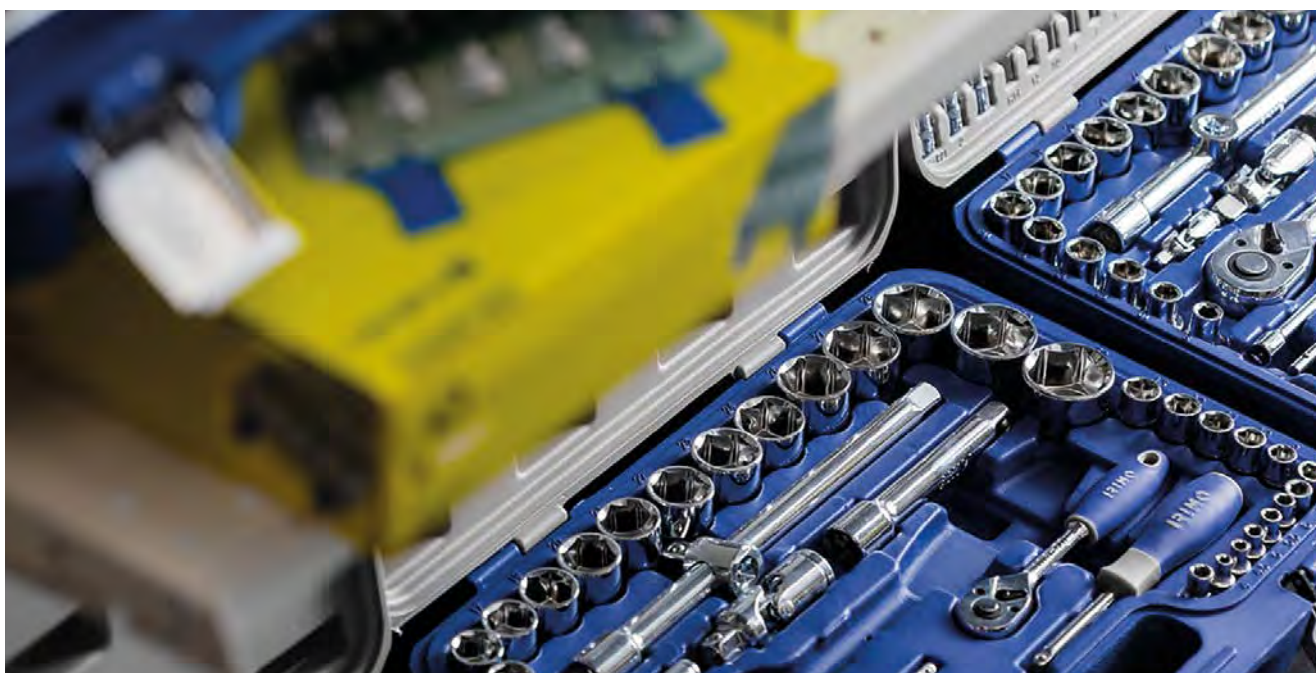

1/2" SOCKET SETS

1/2" SOCKET SET, HEXAGONAL AND METRIC

1/2"

mm

x 23



- 23 pcs socket set
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks



129-23-4



1



320x250x75



3.500


125-70-1




125-43-1



125-25-1



125-23-1



125-40-1



121-08-1, 121-10-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-23-1, 121-24-1, 121-26-1, 121-27-1, 121-28-1, 121-30-1, 121-32-1

1/2"



1/2" SOCKET SET, HEXAGONAL AND METRIC

1/2"

mm

x 33



- 33 pcs sockets and wrenches set
- Hex sockets, metric sizes
- Combination wrenches, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks



129-33W-4



1



320x250x75



5.020


125-70-1




125-43-1



125-25-1



125-23-1



125-40-1



25-08-1, 25-09-1, 25-10-1, 25-11-1, 25-12-1, 25-13-1, 25-14-1, 25-15-1, 25-17-1, 25-19-1



121-08-1, 121-10-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-23-1, 121-24-1, 121-26-1, 121-27-1, 121-28-1, 121-30-1, 121-32-1

1/2"



1/4"-1/2" SOCKET SET, HEXAGONAL AND METRIC



x 58

- 58 pcs socket set
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks

129-58-4	1	380x280x80	4.750
105-50-1		105-70-1	
105-42-1		105-40-1	
105-22-1		105-24-1	
125-70-1		125-43-1	
125-25-1		125-40-1	
125-23-1			
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1			
121-08-1, 121-10-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-23-1, 121-24-1, 121-26-1, 121-27-1, 121-28-1, 121-30-1, 121-32-1			
040001, 040011, 040021			
475-PH1-1, 475-PH2-1, 475-PH3-1			
475-PZ1-1, 475-PZ2-1, 475-PZ3-1			
475-3-1, 475-4-1, 475-5-1			
475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1			


1/4"-1/2" SOCKET SET, HEXAGONAL, INCHES



x 53

- 53 pcs socket set
- Hexagonal sockets, AF
- Bright chrome plating finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks

129A-53-4	1	380x280x80	4.750
105-48-1		105-70-1	
105-42-1		105-50-1	
105-22-1		105-24-1	
105-40-1		125-70-1	
125-25-1		125-43-1	
125-23-1		125-40-1	
101A-05-1, 101A-06-1, 101A-07-1, 101A-08-1, 101A-09-1, 101A-10-1, 101A-11-1, 101A-12-1, 101A-14-1, 101A-16-1, 101A-18-1			
122A-10-1, 122A-11-1, 122A-12-1, 122A-14-1, 122A-16-1, 122A-18-1, 122A-20-1, 122A-22-1, 122A-24-1, 122A-26-1, 122A-28-1, 122A-30-1, 122A-34-1, 122A-38-1, 122A-40-1			
040001, 040011, 040021			
475-PH1-1, 475-PH2-1, 475-PH3-1			
475-PZ1-1, 475-PZ2-1, 475-PZ3-1			
475-3-1, 475-4-1, 475-5-1			
1/4" Hex 1/8", 5/32", 3/16", 7/32" AF			



1/2" SOCKET SETS

1/4"-1/2" SOCKET SET, HEXAGONAL AND METRIC

1/4" 1/2" mm

x 108



- 108 pcs socket set
- Hexagonal sockets, metric sizes
- Chrome plated, bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122, ISO 10102
- Box in high density polyethylene
- Box with metal locks

129-108-4	1	380x280x80	7.100
105-48-1		105-70-1	
125-42-1		105-50-1	
105-22-1		105-40-1	
105-24-1		125-70-1	
125-48-1		125-43-1	
125-25-1		125-23-1	
125-40-1			
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1		1/4"	
103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1, 103-12-1, 103-13-1		1/4"	
106-04-1, 106-05-1, 106-06-1, 106-07-1, 106-08-1			
121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-16-1, 121-17-1, 121-18-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1		1/2"	
126-10-1, 126-11-1, 126-12-1, 126-14-1, 126-16-1, 126-18-1, 126-20-1, 126-24-1			
124-14-1, 124-15-1, 124-17-1, 124-19-1, 124-22-1		1/2"	
125-53-1, 125-54-1			
107-T08-1, 107-T10-1, 107-T15-1, 107-T20-1, 107-T25-1, 107-T27-1, 107-T30-1			
107-H3-1, 107-H4-1, 107-H5-1, 107-H6-1			
107-PH1-1, 107-PH2-1			
107-PZ1-1, 107-PZ2-1			
107-0840-1, 107-1055-1, 107-1280-1			
040001, 040011, 040021			
045801, 045811, 045821			
470-10.0-1, 470-12.0-1, 470-8.0-1			
470-H10-1, 470-H7-1, 470-H8-1			
470-PH3-1, 470-PH4-1			
470-T40-1, 470-T45-1, 470-T50-1, 470-T55-1, 470-T60-1			
470-PZ3-1, 470-PZ4-1			

1/4"-1/2" SOCKET SET, HEXAGONAL, INCHES

1/4" 1/2" in

x 103



- 103 pcs socket set, AF sizes
- Hexagonal sockets
- Bright chrome plating finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks

129A-103-4	1	380x280x80	7.000
105-40-1		105-70-1	
105-42-1		105-50-1	
105-22-1		105-24-1	
125-70-1		125-43-1	
125-25-1		125-40-1	
125-23-1		125-48-1	
101A-05-1, 101A-06-1, 101A-07-1, 101A-08-1, 101A-10-1, 101A-11-1, 101A-12-1, 101A-14-1, 101A-16-1, 101A-18-1		1/4"	
103A-06-1, 103A-08-1, 103A-09-1, 103A-10-1, 103A-11-1, 103A-12-1, 103A-14-1, 103A-16-1		1/4"	
106-04-1, 106-05-1, 106-06-1, 106-07-1, 106-08-1			
122A-12-1, 122A-14-1, 122A-16-1, 122A-18-1, 122A-20-1, 122A-22-1, 122A-24-1, 122A-26-1, 122A-28-1, 122A-40-1		1/2"	
124A-18-1, 124A-20-1, 124A-22-1, 124A-24-1, 124A-26-1		1/2"	
126-10-1, 126-11-1, 126-12-1, 126-14-1, 126-16-1, 126-18-1, 126-20-1, 126-24-1			
125-53-1, 125-54-1			
107-T08-1, 107-T09-1, 107-T10-1, 107-T15-1, 107-T20-1, 107-T25-1, 107-T27-1, 107-T30-1			
107A-4-1, 107A-5-1, 107A-6-1, 107A-7-1			
107-PH1-1, 107-PH2-1			
107-PZ1-1, 107-PZ2-1			
107-0840-1, 107-1055-1, 107-1280-1			
040001, 040011, 040021			
470-T40-1, 470-T45-1, 470-T50-1, 470-T55-1, 470-T60-1			
470-10.0-1, 470-12.0-1, 470-8.0-1			
470-H7-1, 470-H8-1, 470-H10-1, 470-H12-1, 470-H14-1			
470-PH3-1, 470-PH4-1			
470-PZ3-1, 470-PZ4-1			

1/4"-1/2" SOCKET SET, HEXAGONAL AND METRIC

1/4" 1/2" mm

x 101



- 101 pcs socket set
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks

Part Number	Quantity	Dimensions	Weight
129-101-4	1	380x280x80	7.000
105-48-1			
105-42-1			
105-22-1			
105-24-1			
125-70-1			
125-25-1			
125-23-1			
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1			
103-06-1, 103-07-1, 103-08-1, 103-10-1, 103-11-1, 103-12-1, 103-13-1, 103-14-1			
121-08-1, 121-10-1, 121-12-1, 121-13-1, 121-14-1, 121-16-1, 121-17-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-23-1, 121-24-1, 121-26-1, 121-27-1, 121-28-1, 121-30-1, 121-32-1			
124-13-1, 124-17-1, 124-19-1, 124-22-1			
107-T08-1, 107-T10-1, 107-T15-1, 107-T20-1, 107-T25-1, 107-T30-1			
107-H3-1, 107-H 4-1, 107-H5-1, 107-H6-1			
107-PH1-1, 107-PH2-1			
107-PZ1-1, 107-PZ2-1			
107-0840-1, 107-1055-1, 107-1280-1			
040001, 040011, 040021			
475-H3-1, 475-H4-1, 475-H5-1			
475-T10-1, 475-T15-1, 475-T20-1, 475-T25-1, 475-T27-1, 475-T30-1			
470-8.0-1, 470-10.0-1			
470-H6-1, 470-H7-1, 470-H8-1, 470-H10-1			
470-T30-1, 470-T40-1, 470-T45-1, 470-T50-1, 470-T55-1			

SOCKET SET 1/4", 3/8" AND 1/2"

1/4" 3/8" 1/2" mm

x 172



- 172 pcs socket set
- Hexagonal sockets, metric sizes
- Chrome plated, bright finish
- DIN 3120, DIN 3124, DIN 3122, ISO 10102
- Box in high density polyethylene
- Box with metal locks

Part Number	Quantity	Dimensions	Weight
129-172-4	1	100x500x370	9.650
105-48-1			
105-42-1			
105-22-1			
105-24-1			
115-22-1			
115-40-1			
125-70-1			
125-25-1			
125-23-1			
101-04-1, 101-045-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1, 101-13-1, 101-14-1			
103-04-1, 103-05-1, 103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1			
106-04-1, 106-05-1, 106-06-1, 106-07-1, 106-08-1			
112-10-1, 112-11-1, 112-12-1, 112-13-1, 112-14-1, 112-15-1, 112-16-1, 112-17-1, 112-18-1, 112-19-1			
113-10-1, 113-11-1, 113-12-1, 113-13-1, 113-14-1, 113-15-1			
126-20-1, 126-24-1			
125-53-1, 125-54-1			
121-10-1, 121-11-1, 121-12-1, 121-13-1, 121-14-1, 121-15-1, 121-16-1, 121-17-1, 121-18-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1			
107-T08-1, 107-T09-1, 107-T10-1, 107-T15-1, 107-T20-1, 107-T25-1, 107-T27-1, 107-T30-1			
107-H3-1, 107-H4-1, 107-H5-1, 107-H6-1			
107-PH0-1, 107-PH1-1, 107-PH2-1			
107-PZ0-1, 107-PZ1-1, 107-PZ2-1			
1/4" Drive bit socket: 4.5-5-6.5-7 mm			
1/4" Drive bit socket: T8H-T9H-T10H-T15H-T20H-T25H-T27H-T30H			
3/8" Drive E-Profile sockets: E10-E11-E12-E14-E16-E18			
3/8" Drive Spark Plug Socket: 16 mm			
1/2" Drive Deep Socket: (6 PT) 16-17-18-19-22 mm			
Hex Key Wrench: 1.5-2-2.5-3-4-5-6 mm			
20 pcs 1/4" bit 25 mm L W/ Holder: T8-T9-T10-T15-T20-T25-T27-T30-T40-T45 / H3-H4-H5-H6 / PH0-PH1-PH2 / PZ0-PZ1-PZ2			
24 pcs 8 mm Bit 30 mm L: T40-T45-T50-T55-T60-T70 / H7-H8-H10-H12-H14 / T40H-T45H-T50H-T55H-T60H-T70H / PH3-PH4 / PZ3-PZ4 / SL8-SL10-SL12			

1/2" SOCKET SETS

Socket set 1/4, 3/8 and 1/2"

149-164-4



490 x 370 x 100



1



12.9

1/4"

3/8"

1/2"

mm

x 164



- 164 pcs socket set
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with two extra locks to ensure the transport


105-48-1		105-70-1	
105-24-1		105-50-1	
105-22-1		105-40-1	
115-70-1		115-40-1	
115-20-1		115-24-1	
115-44-1		115-46-1	
115-48-1		125-70-1	
125-23-1		125-25-1	
125-46-1		125-40-1	
601-200-1		612-160-1	
475R-1/4-30		48-9-H	
475-5-1			

101-04-1, 101-05-1, 101-055-1, 101-06-1, 101-07-1, 101-08-1, 101-09-1, 101-10-1, 101-11-1, 101-12-1	
103-04-1, 103-05-1, 103-06-1, 103-07-1, 103-08-1, 103-09-1, 103-10-1, 103-11-1, 103-12-1	
112-08-1, 112-09-1, 112-10-1, 112-11-1, 112-12-1, 112-13-1, 112-14-1, 112-15-1, 112-16-1, 112-17-1, 112-18-1, 112-19-1	
113-08-1, 113-09-1, 113-10-1, 113-11-1, 113-12-1, 113-13-1, 113-14-1, 113-15-1, 113-17-1, 113-19-1	
121-14-1, 121-17-1, 121-18-1, 121-19-1, 121-20-1, 121-21-1, 121-22-1, 121-24-1, 121-27-1, 121-30-1, 121-32-1	
124-12-1, 124-13-1, 124-14-1, 124-15-1, 124-17-1, 124-18-1, 124-19-1, 124-21-1, 124-22-1	
167-17-1, 167-19-1, 167-21-1, 167-23-1	
18-12-1, 18-13-1, 18-14-1	
25-08-1, 25-09-1, 25-10-1, 25-11-1, 25-12-1, 25-13-1, 25-14-1, 25-17-1, 25-18-1, 25-19-1	
475-T10-1, 475-T15-1, 475-T20-1, 475-T25-1, 475-T27-1, 475-T30-1, 475-T40-1	
475-TR10-1, 475-TR15-1, 475-TR20-1, 475-TR25-1, 475-TR27-1, 475-TR30-1, 475-TR40-1	
3/8" Drive Spark Plug Sockets: 16-21 mm	
3/8" Drive bit socket: 3-4-5-6 mm	
3/8" Drive bit sockets: PH1-PH2	
3/8" Drive bit sockets: PZ1-PZ2	
3/8" Drive bit sockets: TR10-TR15-TR20-TR25-TR30-TR40	
3/8" TORX® sockets: E8, E10, E11, E12, E14, E16, E18, E20	

3/4" SOCKETS

3/4" HEXAGONAL SOCKETS

6 mm




- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Hexagonal
- Wave shape profile NPP
- Standards: DIN 3124, DIN 3120

Q			A mm	B mm	C mm	L mm	g
131-19-1	1	19	30	12	36	50	200
131-21-1	1	21	32	12	36	50	215
131-22-1	1	22	33	12	36	50	215
131-23-1	1	23	34	14	36	50	215
131-24-1	1	24	34	16	36	50	215
131-25-1	1	25	38	16	36	50	220
131-26-1	1	26	38	16	36	52	220
131-27-1	1	27	38	18	36	52	240
131-28-1	1	28	38	18	36	52	250
131-29-1	1	29	42	18	38	52	260
131-30-1	1	30	42	20	38	52	275
131-32-1	1	32	44	22	38	52	310
131-33-1	1	33	46	22	38	55	340
131-34-1	1	34	46	22	38	57	330
131-35-1	1	35	48	24	42	57	380
131-36-1	1	36	50	24	42	57	415
131-38-1	1	38	52	26	44	57	455
131-40-1	1	40	56	27	44	63	505
131-41-1	1	41	56	27	44	63	545
131-42-1	1	42	58	27	44	63	600
131-46-1	1	46	62	30	44	68	650
131-50-1	1	50	68	33	44	72	755
131-55-1	1	55	75	36	48	75	1.000
131-60-1	1	60	80	39	48	77	1.100

3/4" BIHEXAGONAL SOCKETS

12 mm



- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Bi-Hexagonal
- Wave shape profile NPP
- Standards: DIN 3120, DIN 3124


Q			A mm	B mm	C mm	L mm	g
131B-19-2	1	19	30	12	36	50	200
131B-21-2	1	21	32	12	36	50	215
131B-22-2	1	22	33	12	36	50	215
131B-23-2	1	23	34	14	36	50	215
131B-24-2	1	24	34	16	36	50	215
131B-26-2	1	26	38	16	36	52	220
131B-27-2	1	27	38	18	36	52	240
131B-29-2	1	29	42	18	38	52	260
131B-30-2	1	30	42	20	38	52	275
131B-32-2	1	32	44	22	38	52	310
131B-35-2	1	35	48	24	42	57	380
131B-36-2	1	36	50	24	42	57	415
131B-38-2	1	38	52	26	44	57	455
131B-41-2	1	41	56	27	44	63	545
131B-46-2	1	46	56	27	44	63	545
131B-50-2	1	50	67	29	46	72	715

12 in

Q			A mm	B mm	C mm	L mm	g
132A-28-1	1	7/8"	33	12	36	50	215
132A-30-1	1	15/16"	35	16	36	50	215
132A-32-1	1	1"	38	16	36	52	200
132A-34-1	1	1.1/16	38	18	36	54	240
132A-36-1	1	1.1/8"	42	18	38	55	280
132A-40-1	1	1.1/4"	44	22	38	55	310
132A-42-1	1	1.5/16"	46	22	38	57	340
132A-44-1	1	1.3/8"	48	24	42	57	380
132A-46-1	1	1.7/16"	50	24	42	57	415
132A-48-1	1	1.1/2"	52	26	44	57	455
132A-52-1	1	1.5/8"	56	27	44	63	545
132A-54-1	1	1.11/16"	58	27	44	63	600
132A-60-1	1	1.7/8"	65	30	44	68	700
132A-64-1	1	2"	68	33	44	72	755

3/4" ACCESSORIES

3/4" REVERSIBLE RATCHET HEAD

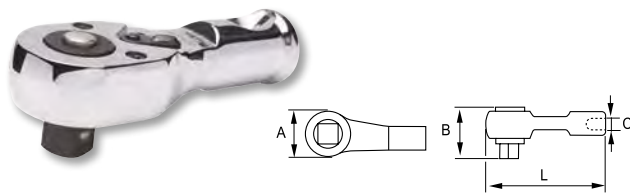

- 24 Teeth
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Quick release
- Standards: DIN 3120, DIN 3122

		A mm	B mm	C mm	L mm	g
135-70-1	1	65	61.5	20	155	1.360


3/4" RATCHET HANDLE



- Ratchet handle

		C mm	L mm	g
135-85-1	1	20	450	1.100


SLIDING T HANDLE HEAD

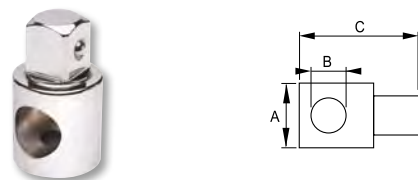

- Ball retaining system

		A mm	B mm	C mm	g
135-43-1	1	35	20.5	60	235

3/4"-1/2" REDUCING ADAPTOR

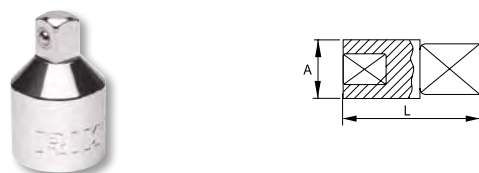

- Reducing adaptor 3/4" to 1/2"
- Ball retaining system

		A mm	L mm	g
135-46-1	1	36	54	260

3/4" EXTENSIONS



- Ball retaining system

		A mm	B mm	L mm	g
135-21-1	1	36	23	125	515
135-22-1	1	36	23	200	725
135-24-1	1	36	23	400	1.350

3/4" SLIDING T-HANDLE



- Ball retaining system

		A mm	B mm	C mm	L mm	g
135-42-1	1	36	20	60	450	1.335


3/4" UNIVERSAL JOINT



- Ball retaining system

		A mm	L mm	g
135-40-1	1	40	108	540

3/4" SWIVEL HANDLE

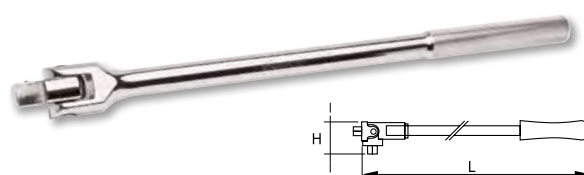

- Ball retaining system

		H mm	L mm	g
135-52-1	1	40	450	1.700

3/4" SOCKET SETS

3/4" SOCKET SET, METRIC

3/4" mm

x 17



- 17 pcs socket set
- Hex sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome-plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks
- Spare Box part number: SP-106S-BOX17
- Two spare locks 3/4": SP104S

Part Number	Quantity	Dimensions	Weight
139-17-4	1	475x295x100	12.500
135-70-1		135-24-1	
135-22-1		135-43-1	
135-85-1			
131-22-1, 131-24-1, 131-27-1, 131-30-1, 131-32-1, 131-33-1, 131-34-1, 131-36-1, 131-38-1, 131-41-1, 131-46-1, 131-50-1			

3/4" SOCKET SET, METRIC

3/4" mm

x 21



- 21 pcs socket set
- Hexagonal sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks
- Spare Box part number: SP-106S-BOX21

Part Number	Quantity	Dimensions	Weight
139-21-4	1	475x295x100	11.900
135-70-1		135-24-1	
135-22-1		135-43-1	
135-85-1			
131-19-1, 131-21-1, 131-22-1, 131-23-1, 131-24-1, 131-26-1, 131-27-1, 131-29-1, 131-30-1, 131-32-1, 131-35-1, 131-36-1, 131-38-1, 131-41-1, 131-46-1, 131-50-1			

3/4" SOCKET SET, METRIC

3/4" mm

x 21



- 21 pcs socket set
- Bihexagonal sockets, metric sizes
- Chrome vanadium alloy steel
- Chrome plated bright finish
- Standards: DIN 3120, DIN 3124, DIN 3122
- Box in high density polyethylene
- Box with metal locks
- Spare Box part number: SP-106S-BOX21


Part Number	Quantity	Dimensions	Weight
139-21B-4	1	475x295x100	11.900
135-70-1		135-24-1	
135-22-1		135-43-1	
135-85-1			
131B-19-2, 131B-21-2, 131B-22-2, 131B-23-2, 131B-24-2, 131B-26-2, 131B-27-2, 131B-29-2, 131B-30-2, 131B-32-2, 131B-35-2, 131B-36-2, 131B-38-2, 131B-41-2, 131B-46-2, 131B-50-2			



3/8" IMPACT SOCKETS


3/8" IMPACT HEXAGONAL SOCKETS, METRIC

6 mm



3/8" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC

6 mm




• Standards: UNE 16507, ISO 2725, DIN 3129

R			A mm	B mm	C mm	L mm	g
160-07-1	1	7	12.6	13	19	32	39
160-08-1	1	8	14	13	19	32	39
160-10-1	1	10	15.8	13	19	32	40
160-11-1	1	11	16.9	13	19	32	41
160-12-1	1	12	18.2	13	19	32	41
160-13-1	1	13	19.5	13	22	32	54
160-14-1	1	14	20.5	13	22	32	54
160-15-1	1	15	22	16	22	32	54
160-16-1	1	16	24	16	22	32	57
160-17-1	1	17	25	17	22	34	67
160-18-1	1	18	26	17	22	34	67
160-19-1	1	19	28	17	22	34	71
160-20-1	1	20	28	17	22	34	79
160-21-1	1	21	30	17	22	34	80
160-24-1	1	24	34	17	22	34	102

R			A mm	B mm	C mm	L mm	g
161-10-1	1	10	15.9	10	19	63	77
161-13-1	1	13	19.7	10	19	63	96
161-17-1	1	17	24.5	11	22	63	184

3/8" IMPACT ACCESSORIES

3/8" EXTENSIONS

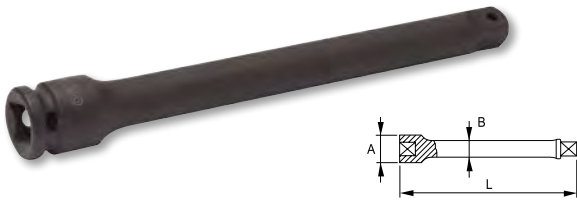

- Standards: DIN 16503, ISO 1174

		A mm	B mm	L mm	g
162-00-1	1	19	12.5	75	99
162-02-1	1	19	12.5	150	159


3/8" UNIVERSAL JOINT



- Standards: DIN 16503, ISO 1174

		A mm	L mm	g
162-50-1	1	22	50	124


3/8"-1/4" REDUCING ADAPTOR

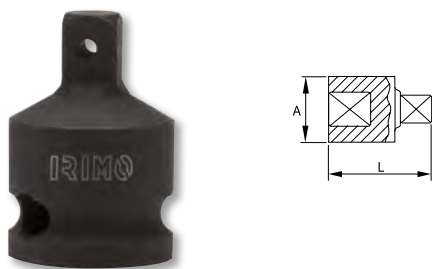

- 3/8" to 1/4" reducing adaptor
- Standards: DIN 16503, ISO 1174
- Due to the special working conditions of this adaptor, it is not guaranteed against male failure

		A mm	L mm	g
162-65-1	1	19	28	57

3/8"-1/2" INCREASING ADAPTOR

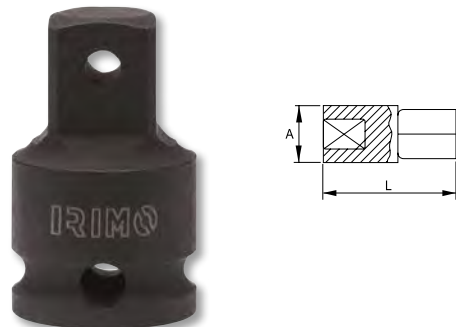

- 3/8" to 1/2" increasing adaptor
- Standards: DIN 16503, ISO 1174

		A mm	L mm	g
162-60-1	1	22	36	96

SAFETY SPRINGS




- 3/8" safety rings

				g
162931	1	3/8"	7-12	2
162941	1	3/8"	13-24	2

1/2" IMPACT SOCKETS


1/2" IMPACT HEXAGONAL SOCKETS, METRIC

6 mm



1/2" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC

6 mm



• Standards: UNE 16507, ISO 2725, DIN 3129

			A mm	B mm	C mm	L mm	g
167-08-1	1	8	15	15	25	38	84
167-10-1	1	10	17.5	15	25	38	89
167-12-1	1	12	19	15	25	38	94
167-13-1	1	13	20	15	25	38	94
167-14-1	1	14	22	15	25	38	94
167-15-1	1	15	23	15	25	38	134
167-16-1	1	16	24	15	25	38	134
167-17-1	1	17	26	15	30	38	134
167-18-1	1	18	27	15	30	38	134
167-19-1	1	19	28	17.5	30	38	134
167-20-1	1	20	29	17.5	30	38	137
167-21-1	1	21	30	17.5	30	38	149
167-22-1	1	22	32	17.5	30	38	149
167-23-1	1	23	34	18	30	40	149
167-24-1	1	24	34	18	30	40	179
167-26-1	1	26	36	22	30	42	189
167-27-1	1	27	38	22	30	42	204
167-30-1	1	30	42	22	30	44	234
167-32-1	1	32	44	22	40	44	282
167-34-1	1	34	46	22	40	48	406
167-36-1	1	36	48	22	40	48	467
167-38-1	1	38	50	23	40	48	480
167-41-1	1	41	50	24	42	48	495

			A mm	B mm	C mm	L mm	g
168-10-1	1	10	17.5	24	25	78	118
168-11-1	1	11	18	24	25	78	121
168-13-1	1	13	20	24	25	78	163
168-14-1	1	14	22	37	25	78	190
168-16-1	1	16	24	37	25	78	239
168-17-1	1	17	26	37	30	78	239
168-18-1	1	18	27	37	30	78	239
168-19-1	1	19	28	39	30	78	246
168-21-1	1	21	30	39	30	78	267
168-22-1	1	22	32	39	30	78	328
168-23-1	1	23	34	39	30	78	348
168-24-1	1	24	34	39	30	78	351
168-27-1	1	27	38	39	30	78	373
168-30-1	1	30	42	39	30	78	409
168-32-1	1	32	43	40	32	78	415

1/2" IMPACT SOCKET HEXAGONAL SET MM

1/2" mm

x 7



- High performance Cr-Mo alloy steel
- Phosphated finish
- To be used with machines
- To be used with safety spring
- Dynamic-drive profile to protect nuts
- High density polyethylene box
- Standards: UNE 16507, DIN 3129, ISO 2725

168-7-4	1	52 x 180 x 255	2.100	

168-10-1, 168-13-1, 168-17-1, 168-19-1, 168-22-1, 168-24-1, 168-27-1



1/2" IMPACT SOCKET HEXAGONAL SET MM

1/2" mm

x 9



- High performance Cr-Mo alloy steel
- Phosphated finish
- To be used with machines
- To be used with safety spring 169921 or 169931
- Dynamic-drive profile to protect nuts
- High density polyethylene box
- Standards: UNE 16507, DIN 3129, ISO 2725

Q	1	58x170x210	g
167-9-4	1	58x170x210	1.610
167-17-1, 167-19-1, 167-22-1, 167-24-1, 167-27-1			1/2"
169-01-1		169-25-1	
169-65-1		169-60-1	

1/2" IMPACT SOCKET HEXAGONAL SET MM

1/2" mm

x 11



- High performance Cr-Mo alloy steel
- Phosphated finish
- To be used with machines
- To be used with safety spring
- Dynamic-drive profile to protect nuts
- High density polyethylene box
- -Standards: UNE 16507, DIN 3129, ISOV2725

Q	1	58x170x210	g
167-11-4	1	58x170x210	1.600
167-08-1, 167-10-1, 167-12-1, 167-14-1, 167-17-1, 167-19-1, 167-22-1, 167-24-1, 167-27-1			1/2"
169-03-1		169-25-1	

1/2" IMPACT SOCKET SET

1/2" mm

x 10



- Set 10 impact socket
- Strong blow moulded case
- Hex sockets
- Black finish
- Standards: ISO 2725, DIN 3129
- Plastic box in high density polyethylene

Q	1	200x160x52	g
167-10-4	1	200x160x52	1.425
167-10-1, 167-13-1, 167-14-1, 167-16-1, 167-17-1, 167-18-1, 167-19-1, 167-21-1, 167-22-1, 167-24-1			1/2"

1/2" IMPACT SOCKET HEXAGONAL SET MM

1/2" mm

x 14




- High performance Cr-Mo alloy steel
- Phosphated finish
- To be used with machines
- To be used with safety spring
- Dynamic-drive profile to protect nuts
- High density polyethylene box
- Standards: UNE 16507, DIN 3129, ISO 2725

Q	1	82x263x335	g
168-14-4	1	82x263x335	4.230
168-10-1, 168-11-1, 168-13-1, 168-14-1, 168-16-1, 168-17-1, 168-18-1, 168-19-1, 168-21-1, 168-22-1, 168-24-1, 168-27-1, 167-30-1, 167-32-1			1/2"

1/2" IMPACT ACCESSORIES


1/2" EXTENSIONS



- Standards: DIN 16503, ISO 1174

		A mm	B mm	L mm	
169-03-1	1	25	16.5	75	139
169-01-1	1	25	16.5	125	274
169-02-1	1	25	16.5	150	484


1/2"-3/4" INCREASING ADAPTOR



- 1/2" to 3/4" increasing adaptor
- Standards: DIN 16503, ISO 1174

		A mm	L mm	
169-60-1	1	30	48	114


1/2"-3/8" REDUCING ADAPTOR



- 1/2" to 3/8" reducing adaptor
- Standards: ISO 1174, DIN 16503
- Due to the special working conditions of this adaptor, it is not guaranteed against male failure

		A mm	L mm	
169-65-1	1	25	38	129

1/2" UNIVERSAL JOINT



- Standards: DIN 16503, ISO 1174

		A mm	L mm	
169-25-1	1	30	63	189

SAFETY SPRINGS




- 1/2" safety rings

169921	1	1/2"	10-14	5-10	2
169931	1	1/2"	15-36	12-19	2

3/4" IMPACT SOCKETS


3/4" IMPACT HEXAGONAL SOCKETS, METRIC

6 mm



3/4" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC

6 mm



• Standards: UNE 16507, ISO 2725, DIN 3129

R			A mm	B mm	C mm	L mm	g
173-17-2	1	17	30	21	44	51	339
173-18-2	1	18	32	21	44	51	339
173-19-2	1	19	33	21	44	51	349
173-21-2	1	21	35	21	44	51	359
173-22-2	1	22	36	21	44	51	359
173-23-2	1	23	37	21	44	51	369
173-24-2	1	24	38	21	44	51	379
173-27-2	1	27	41	21	44	51	399
173-28-2	1	28	42	23	44	51	409
173-29-2	1	29	45	23	44	51	409
173-30-2	1	30	46	23	44	51	439
173-32-2	1	32	48	27	44	57	469
173-33-2	1	33	50	27	44	57	489
173-34-2	1	34	51	27	44	57	509
173-36-2	1	36	53	27	44	57	519
173-38-2	1	38	56	27	44	57	559
173-41-2	1	41	59	28	44	58	659
173-46-2	1	46	66	30	44	62	709
173-50-2	1	50	71	32	54	65	839
173-55-2	1	55	77	37	54	70	1109
173-60-2	1	60	84	37	54	70	1200

R			A mm	B mm	C mm	L mm	g
174-17-2	1	17	30	23	44	90	560
174-19-2	1	19	33	23	44	90	600
174-21-2	1	21	35	23	44	90	680
174-22-2	1	22	36	23	44	90	700
174-24-2	1	24	38	23	44	90	750
174-27-2	1	27	41	23	44	90	800
174-30-2	1	30	46	27	44	90	898
174-32-2	1	32	48	27	44	90	957
174-33-2	1	33	50	27	44	90	1010
174-34-2	1	34	51	27	44	90	1030
174-36-2	1	36	55	27	44	90	1084
174-41-2	1	41	59	28	44	90	1270

3/4" IMPACT SOCKET SET, IN METAL BOX

3/4" mm

x 8




• Set in metal box

R				g
173-01-5	1	24 - 27 - 29 - 30 - 32 - 34 - 36 - 38 mm		4.000

3/4" IMPACT ACCESSORIES


3/4" EXTENSIONS



- Standards: DIN 16503, ISO 1174

R		A mm	B mm	L mm	g
175-01-2	1	175	44	21	850
175-10-2	1	250	44	21	1.190
175-02-2	1	325	44	21	1.460


3/4" UNIVERSAL JOINT



- Standards: DIN 16503, ISO 1174

R		A mm	L mm	g
175-25-2	1	42	92	580


3/4"-1" INCREASING ADAPTOR



- 3/4" to 1" increasing adaptor
- Standards: DIN 16503, ISO 1174

R		A mm	L mm	g
175-60-2	1	44	63	410


3/4"-1/2" REDUCING ADAPTOR



- 3/4" to 1/2" reducing adaptor
- Standards: DIN 16503, ISO 1174
- Due to the special working conditions of this adaptor, it is not guaranteed against male failure

R		A mm	L mm	g
175-65-2	1	44	57	350

SAFETY SPRINGS




- 3/4" safety rings

R					g
175911	1	3/4"	17-46	12-24	2
179931	1	3/4"	50-60		2

1" IMPACT SOCKETS


1" IMPACT HEXAGONAL SOCKETS, METRIC

6 mm



1" IMPACT HEXAGONAL SOCKETS, LONG SERIES, METRIC

6 mm



• Standards: UNE 16507, ISO 2725, DIN 3129

			A mm	B mm	C mm	L mm	g
177-22-2	1	22	39	22	54	58	645
177-24-2	1	24	41	22	54	58	650
177-27-2	1	27	46	22	54	58	670
177-30-2	1	30	49	24	54	62	680
177-32-2	1	32	52	24	54	62	695
177-33-2	1	33	54	24	54	62	695
177-34-2	1	34	54	24	54	62	720
177-36-2	1	36	56	29	54	65	800
177-38-2	1	38	58	29	54	65	845
177-41-2	1	41	61	34	54	70	920
177-42-2	1	42	64	34	54	70	950
177-46-2	1	46	68	36	54	75	1150
177-50-2	1	50	73	36	54	75	1375
177-55-2	1	55	79	44	54	83	1540
177-60-2	1	60	86	47	54	87	1700
177-65-2	1	65	92	47	54	90	1940
177-70-2	1	70	97	47	54	93	2450
177-75-2	1	75	104	47	86	95	2900
177-80-2	1	80	110	39	86	100	3300

			A mm	B mm	C mm	L mm	g
178-22-2	1	22	39	23	54	90	975
178-24-2	1	24	42	23	54	90	1016
178-27-2	1	27	46	23	54	90	1134
178-30-2	1	30	49	24	54	90	1256
178-32-2	1	32	52	24	54	90	1297
178-33-2	1	33	54	24	54	92	1311
178-34-2	1	34	54	24	54	92	1350
178-36-2	1	36	56	29	54	92	1474
178-38-2	1	38	58	29	54	92	1479
178-41-2	1	41	61	34	54	92	1533
178-46-2	1	46	68	36	54	95	1710
178-50-2	1	50	73	36	54	95	1896
178-55-2	1	55	79	44	54	100	2155
178-60-2	1	60	86	47	54	100	2372

1" IMPACT SOCKET SET, IN METAL BOX

1" mm




x 7

• Set in metal box

177-10-5	1	24 - 27 - 30 - 32 - 33 - 36 - 38 mm	5.500	

1" IMPACT ACCESSORIES


1" EXTENSIONS

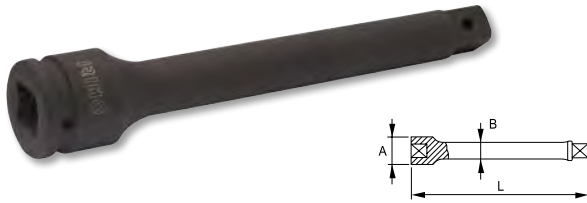

- Standards: DIN 16503, ISO 1174

R		A mm	B mm	L mm	g
179-00-2	1	125	54	34	1.085
179-01-2	1	175	54	34	1.390
179-02-2	1	325	54	34	2.395

SAFETY SPRINGS



- 1" safety rings

R					g
179931	1	1"	19-70	17-27	9
179941	1	1"	75-80		13

1"-3/4" REDUCING ADAPTOR



- 1" to 3/4" reducing adaptor
- Standards: DIN 16503, ISO 1174
- Due to the special working conditions of this adaptor, it is not guaranteed against male failure

R		A mm	L mm	g
179-65-2	1	54	70	350

1" UNIVERSAL JOINT



- Standards: DIN 16503, ISO 1174

R		A mm	L mm	g
179-52-2	1	54	120	650

05.

CLAMPING TOOLS



BENCH VICES


Round Guide Vice

- Capacity range from 3,5 Ton (80 mm) to 9 Ton (150 mm) at maximum opening
- Reinforced cantilever support, to assure resistance at maximum opening
- Protected spindle
- Round shape helps adjusting all the way
- Bigger guide diameter for increased resistance
- Rolled thread spindle, for easy locating and tightening parts
- Greasing points for maintenance
- Extended anvil
- Single piece steel blocks for higher load capacity
- Interchangeable jaws
- Diamond grinded, for better grip
- Thermically treated, for durability
- Perfect jaws alignment
- Optional swivel base



R			B mm	C mm	D mm	L mm	g
201231	1	80	90	42	130	260	5.850
201241	1	100	110	56	166	325	11.350
201251	1	125	130	72	196	375	18.200
201261	1	150	170	80	230	430	29.700

SQUARE GUIDE VICE



SQUARE GUIDE VICE




- Heavy duty square guide bench vice
- Manufactured from high grade cast steel
- Interchangeable jaws
- Oversized anvil
- Laminated spindle thread for smooth operation
- Can be used with swivel base
- Free play adjustment via screw mechanism
- With pipe holding jaws

R			B mm	C mm	D mm	L mm	g
216041	1	100	145	50	122	325	6.497
216051	1	125	170	63	152	402	13.733
216061	1	150	230	80	182	492	20.388
216071	1	175	250	94	211	551	30.688

- Heavy duty square guide bench vice
- Manufactured from high grade cast steel
- Oversized anvil
- Interchangeable jaws are available
- Laminated spindle thread for smooth operation
- Can be used with swivel base

R			B mm	C mm	D mm	L mm	g
207041	1	100	145	50	122	325	6.200
207051	1	125	170	63	152	402	13.200
207061	1	150	230	80	182	492	19.800
207071	1	175	250	94	211	551	30.100

SQUARE GUIDE VICE



- Heavy duty square guide bench vice
- Manufactured from ductile iron, with similar characteristics to steel
- High impact resistance and durability
- Fitted with swivel base
- Large square anvil
- Added a stop pin at the main screw end to prevent jaw from falling out
- Spare jaws and spindle available
- GS certification

Q			B mm	C mm	D mm	L mm	g
207-100	1	100	100	61	164	330	11.450
207-125	1	125	125	72	193	408	20.000
207-150	1	150	150	84	223	466	29.700

SPARE PARTS FOR BENCH VICES

SPARE JAWS



- Pair of spare jaws and screws for round guide vice 201

Q			B mm	C mm	D mm	g
202401	1	180	15	10	55	170
202411	1	100	20	12	64	350
202421	1	125	20	12	77	450
202431	1	150	25	14	90	750


SPARE JAWS



- Pair of spare jaws and screws for square guide vices 207041/207071 and 216

Q			B mm	C mm	D mm	g
202441	1	100	15	10	64	350
202421	1	125	20	12	77	450
202451	1	150	20	12	90	750
202461	1	175	25	14	105	1.020

SPARE JAWS

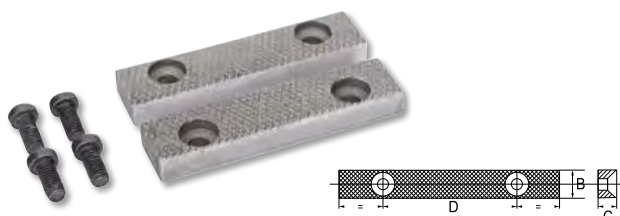

- Pair of spare jaws and screws for square guide vices 207-100/207-150

Q			B mm	C mm	D mm	g
202-100	1	100	20	10	60	270
202-125	1	125	21	12	75	460
202-150	1	150	21	12	90	550

PAIR OF PIPE JAWS AND SCREWS



- Pair of pipe jaws and screws for square guide vices 207041/207071 and 216

Q						g
206721	1	100		13.5 - 26.9		245
206741	1	125		21.3 - 76.1		436
206761	1	150 / 175		26.9 - 89.0		478

SPARE PARTS FOR BENCH VICES

SPARE SPINDLE AND BOLT



- Spare spindle and bolt for round guide vice 201

Q	Icon	mm	L mm	g
202811	1	180	251	875
202821	1	100	317	1.400
202831	1	125	364	2.200
202841	1	150	428	3.400

SPARE SPINDLE



SPARE SPINDLE AND NUT



- Spare spindle and nut for square guide vice 207041/207071 and 216


Q	Icon	mm	L mm	g
206821	1	100	287	600
206831	1	125	352	1.400
206841	1	150	432	2.200
206851	1	175	471	3.200

- Spare spindle for square guide vices 207-100/207-150

Q	Icon	mm	L mm	g
206-100	1	100	165	560
206-125	1	125	188	920
206-150	1	150	216	1.060

ACCESSORIES FOR BENCH VICES

ALUMINIUM JAWS

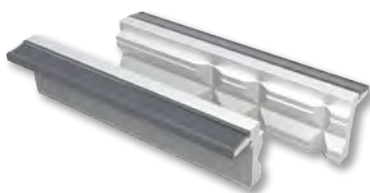

- Prism jaws of hardened aluminium
- Offer efficient clamping and protection of the workpiece at the same time
- Designed for horizontal clamping of flat and round objects
- Designed for vertical clamping of round objects
- 90° recess in the top to hold flat bar stock while marking out or centrepunching
- Horizontal vee-groove with an angle of 120° for clamping of pipes and other round workpieces
- 3 vertical vee-grooves with angles of 100°, 120° and 130° for clamping of pipes and other round workpieces
- Excellent powerful neodymium magnetic strip

Q	Icon	mm	g
202561	1	100	180
202571	1	125	200
202581	1	150	220

ALUMINIUM JAWS



- Neutral jaws of hardened aluminium
- For clamping rough or medium finish, machined workpieces
- Impact resistant extruded polycarbonate PC
- Hardened aluminium offers superior corrosion resistance along with excellent surface finish
- Excellent powerful neodymium magnetic strip

Q	Icon	mm	g
202511	1	100	180
202521	1	125	200
202541	1	150	220


POLYURETHANE JAWS



- Polyurethane jaws with grooves
- For clamping of round parts with very delicate details
- The jaws are manufactured from the special flexible polyurethane material
- Shore hardness A82
- Polyurethane is known for its unique abilities to “bite onto” the work piece without damaging or scratching it
- Polyurethane is so flexible, that it returns to its original shape after deformation
- Excellent powerful neodymium magnetic strip

202661	1	100	150
202671	1	125	175
202681	1	150	200


POLYURETHANE JAWS



- Polyurethane jaws with small cross serrations
- For clamping of flat parts with very delicate details
- The jaws are manufactured from the special flexible polyurethane material
- Shore hardness A82
- Polyurethane is known for its unique abilities to “bite onto” the work piece without damaging or scratching it
- Polyurethane is so flexible, that it returns to its original shape after deformation
- Excellent powerful neodymium magnetic strip

202761	1	100	150
202771	1	125	175
202781	1	150	200

SWIVEL VICE BASE




- Swivel base for all round 201 and 207041/207071 square guide vice models
- Manufactured from high grade cast steel

		Ø mm	mm	L mm	d mm	g
201431	1	80	100	90	11	850
201451	1	100	125	115	13	1.150
201461	1	125	150	145	13	1.500
201471	1	150	175	165	17	2.500

TABLE VICE

MINI BENCH VICE



- Versatile tool for filing, flattening or laying out work
- With swivel base
- Finished anvil
- Material: cast iron
- Blister packaging

			B	C	D	H	L	
		mm	mm	mm	mm	mm	mm	g
217-50-B	1	50	40	34	20	120	125	1.100

SCREW CLAMPS

FORGED WOODEN HANDLE F-CLAMP



- Professional type F clamp with one fixed and one sliding bracket fitted to a galvanised profiled steel rail
- Screwed wooden handle for a comfortable adjusting
- Forged jaws allows a high and maintained clamping force


R		A mm	B mm	HxS mm	g
258-100-2	1	60	100	15.5 x 7.5	450
258-120-2	1	60	120	15.5 x 7.5	750
258-160-2	1	80	160	15.5 x 7.5	900
258-200-2	10	120	200	22 x 10.6	1.200
258-250-2	10	120	250	22 x 10.6	1.500
258-300-2	10	120	300	22 x 10.6	1.586

STEEL CLAMP, 90 MM




R		A mm	B mm	HxS mm	g
256001	5	150	90	30 x 8	1.100
256011	5	200	90	30 x 8	1.200
256031	5	300	90	30 x 8	1.400
256041	5	400	90	30 x 8	1.600

STEEL T-HANDLE CLAMP, 120 MM

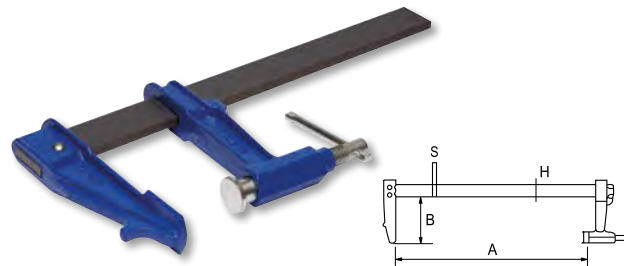


R		A mm	B mm	HxS mm	g
256131	5	300	120	35 x 8	2.000
256141	5	400	120	35 x 8	2.200
256151	5	500	120	35 x 8	2.400
256161	5	600	120	35 x 8	2.600
256181	5	800	120	35 x 8	3.000
256201	5	1.000	120	35 x 8	3.400

NON-SLIP BRAKING MECHANISM CLAMP, 150 MM

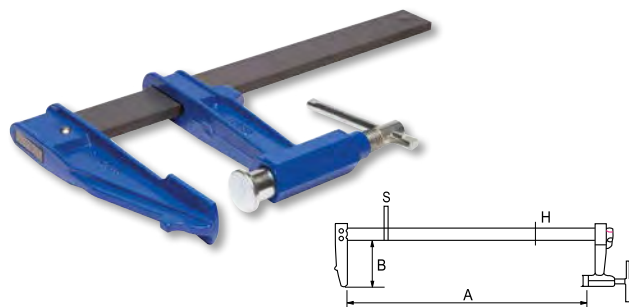


R		A mm	B mm	HxS mm	g
256231	5	300	150	40 x 10	3.100
256241	5	400	150	40 x 10	3.400
256251	2	500	150	40 x 10	3.700
256261	2	600	150	40 x 10	4.000
256281	2	800	150	40 x 10	4.600
256301	2	1.000	150	40 x 10	5.200
256321	1	1.200	150	40 x 10	5.800

LIGHT SCREW CLAMP, 70 MM

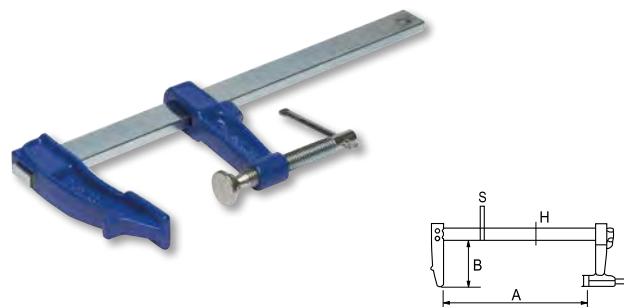

R		A mm	B mm	HxS mm	g
255011	10	120	70	18 x 7	420
255021	10	150	70	18 x 7	450
255031	10	200	70	18 x 7	500
255041	10	250	70	18 x 7	550
255051	10	300	70	18 x 7	600


FORGED RATCHETING F-CLAMP



- Professional clamp
- Strong Clamping tool
- Aluminium body
- Up to 5100 Nw
- Ratcheting system to facilitate adjust and clamping

Q		B mm	A mm	HxS mm	g
257-200-2	10	200	140	25 x 12	986
257-300-2	10	300	140	25 x 12	1.586
257-400-2	10	400	140	25 x 12	2.286
257-500-2	10	500	140	25 x 12	2.886
257-600-2	10	600	140	25 x 12	3.286

QUICK CLAMPS



- High resistance clamps with quick release system
- Clamping capacity over 70 kg
- Reversible jaw mechanism



Q		A mm	B mm	L mm	g
254-150-2	1	150 - 6"	60	335	487
254-300-2	6	300 - 12"	60	485	586
254-450-2	6	450 - 18"	60	635	686
254-600-2	6	600 - 24"	60	785	781
254-900-2	6	900 - 36"	60	1.085	980
254-1200-2	4	1.200 - 48"	60	1.685	1.165


06.

PIPE TOOLS



STILLSON WRENCHES


STILLSON WRENCH

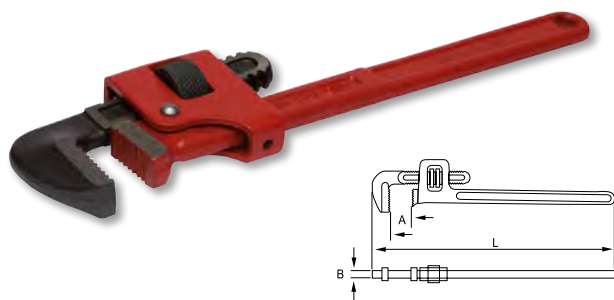

- Forged template steel
- Hardened gripping teeth 55÷60 HRC
- Epoxy painting

Q		A inch	A mm	B mm	L inch	L mm	g
302-210-2	3	1"	19	11	8"	210	290
302-260-2	3	1.3/8"	25	15	10"	260	620
302-310-2	3	1.3/4"	26	17	12"	310	800
302-365-2	3	2"	28	19	14"	365	1.120
302-465-2	1	2.3/8"	30	23	18"	465	1.890
302-615-2	1	3"	39	26	24"	615	3.200
302-900-2	1	4"	48	30	36"	900	6.100

STILLSON ALUMINIUM WRENCH

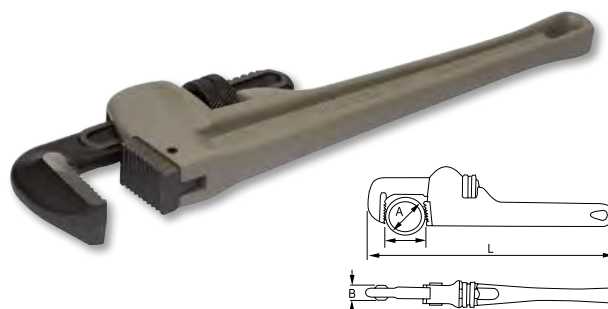

- Aluminium alloy handle with section in double T
- Light, 40% less weight and great resistance

Q		A inch	A mm	B mm	L inch	L mm	g
304-250-2	2	1.1/2"	22	17	10"	250	430
304-350-2	2	2"	26	21	14"	350	950
304-450-2	1	2.1/2"	29	26	18"	450	1.650
304-600-2	1	3"	33	28	24"	600	2.500
304-900-2	1	5"	44	32	36"	900	5.200

SPARE PARTS FOR STILLSON WRENCHES



Q	Q		L inch
302S-210-2	302T-210-2	1	8"
302S-260-2	302T-260-2	1	10"
302S-310-2	302T-310-2	1	12"
302S-365-2	302T-365-2	1	14"
302S-465-2	302T-465-2	1	18"
302S-615-2	302T-615-2	1	24"
302S-900-2	302T-900-2	1	36"

SPARE PARTS FOR STILLSON ALUMINIUM WRENCH



Q	Q	Q	L inch
304S-250-2	304T-250-2	304F-250-2	1 10"
304S-350-2	304T-350-2	304F-350-2	1 14"
304S-450-2	304T-450-2	304F-450-2	1 18"
304S-600-2	304T-600-2	304F-600-2	1 24"
304S-900-2	304T-900-2	304F-900-2	1 36"

CHAIN PIPE WRENCH

CHAIN PIPE WRENCH



- Strong chain made of tempered special steel
- Jaws and body in forged hardened steel
- Double sided tooth system for ratchet-like use
- Self locking function in both directions

Q		S inch	A mm	B mm	L mm	g
307-350-2	1	1.1/2"	8	38	350	1.400
307-685-2	1	2.1/2"	9	79	685	3.500
307-940-2	1	4"	13	60	940	6.700
307-1122-2	1	6"	20	75	1.122	12.600

SPARE CHAIN




- Material: tempered special steel

Q			
307S-350-2	1	307-350-2	340
307S-685-2	1	307-685-2	475
307S-940-2	1	307-940-2	560
307S-1122-2	1	307-1122-2	830

PIPE WRENCHES SWEDISH MODEL


CORNER MOUTH

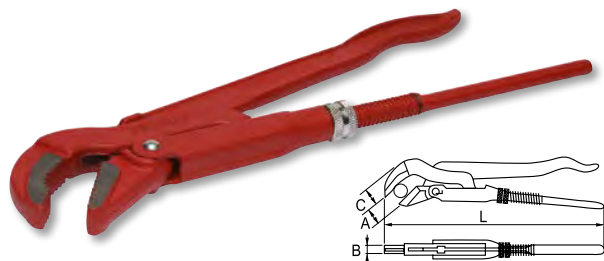

- Forged steel
- Epoxy painting
- Hardened gripping teeth

Q		A inch	A mm	C mm	B mm	L mm	g
303081	1	1/2"	15	20	8	240	665
303111	1	1"	25	25	11	315	1.145
303121	1	1.1/2"	40	27	12	425	1.890
303131	1	2"	50	30	13	550	3.275
303171	1	3"	80	36	17	655	6.425


PERPENDICULAR MOUTH

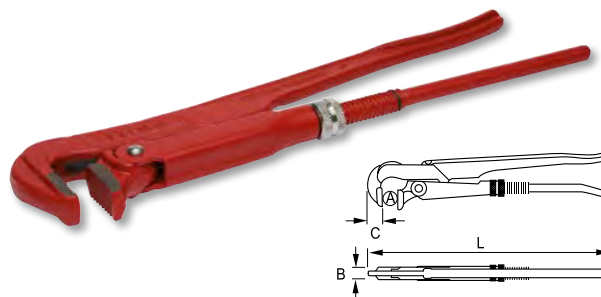

- Forged steel
- Epoxy painting
- Hardened gripping teeth

Q		A inch	A mm	C mm	B mm	L mm	g
303201	1	1"	25	16	18	320	800
303211	1	1.1/2"	40	19	20	425	1.300
303221	1	2"	50	21	25	560	2.300
303231	1	3"	80	22	30	630	2.900
303241	1	4"	117	30	32	735	5.900

CURVED MOUTH

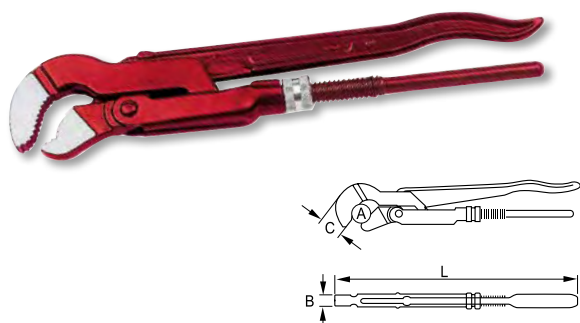


- Forged steel
- Epoxy painting
- Hardened gripping teeth

Q		A inch	A mm	C mm	B mm	L mm	g
303291	1	1/2"	15	13	16	235	400
303301	1	1"	25	17	23	330	800
303311	1	1.1/2"	40	19	27	420	1.400
303321	1	2"	50	21	32	535	2.400
303331	1	3"	80	24	34	648	4.200

PIPE CUTTERS


SMALL COPPER PIPE CUTTER



- Enamelled
- Phosphated finish

R		S inch	Ø mm	L mm	g
321161	2	1/8" - 5/8"	3 - 16	58	122
321171	2	1/8" - 1.1/8"	3 - 30	80	220


MULTIPURPOSE PIPE CUTTER



- Enamelled
- Phosphated finish

R		S inch	Ø mm	L mm	g
321281	1	1/8" - 1.1/8"	3 - 30	30	321


TELESCOPIC COPPER PIPE CUTTER



- Enamelled
- Phosphated finish

R		S inch	Ø mm	L mm	g
321361	1	1/8" - 1.3/8"	3 - 35	160	330

STEEL PIPE CUTTER



- Enamelled
- Phosphated finish

R		S inch	Ø mm	L mm	g
321501	1	1/8" - 2"	3 - 50	385	2.520

SPARE WHEELS



R			D mm	d mm	E mm	g
321511	1	321161/321171/321281/321321/ 321351/321361	20	5	5	5
321551	1	321501	31	9	19	28

AUTO RETRACT PLASTIC TUBE CUTTER



- From 6 to 42 mm
- Used for PVC, CPVC, POLY, PEX & PE tube materials
- Retail packaging

R		L mm	g
321-42-1	12	205	680

SPARE BLADE



- Spare blade for 312-42-1 Plastic tube cutter
- Retail packaging

R		g
321-BLADE-1	25	58

GASKET CUTTERS

GASKET CUTTERS SET

x 11



332-51-4	1	140 x 130 x 40	680	
333-003-2, 333-004-2, 333-006-2, 333-008-2, 333-010-2, 333-012-2, 333-014-2, 333-016-2, 333-018-2, 333-020-2				
332S-030-2				


GASKET CUTTERS SET

x 16



332-52-4	1	140 x 130 x 40	680	
333-003-2, 333-004-2, 333-006-2, 333-008-2, 333-010-2, 333-012-2, 333-014-2, 333-016-2, 333-018-2, 333-020-2, 333-022-2, 333-024-2, 333-026-2, 333-028-2, 333-030-2				
332S-030-2				

GASKET CUTTERS



- Interchangeable gasket washer cutters
- Cuts all gasket materials: leather, rubber, cardboard, fibre, asbestos, lead, felt, plastic, etc.
- Triple sharpening: inside, outside and cutting edge
- Atmosphere protected tempered alloy steel punches

		S mm		A mm	L mm	g
333-003-2	1	3	1/2 x 24 Z"	14	31	15
333-004-2	1	4	1/2 x 24 Z"	14	31	15
333-006-2	1	6	1/2 x 24 Z"	14	31	15
333-008-2	1	8	1/2 x 24 Z"	14	31	15
333-010-2	1	10	1/2 x 24 Z"	14	31	15
333-012-2	1	12	Flat	25	30	30
333-014-2	1	14	Flat	25	30	30
333-016-2	1	16	Flat	25	30	30
333-018-2	1	18	Flat	25	30	30
333-020-2	1	20	Flat	25	30	30
333-022-2	1	22	Flat	35	35	50
333-024-2	1	24	Flat	35	35	50
333-026-2	1	26	Flat	35	35	50
333-028-2	1	28	Flat	35	35	50
333-030-2	1	30	Flat	35	35	50

WAD PUNCHES 3 - 30 HANDLE



332S-030-2	1	003-030 mm	350	

REVOLVER WAD PUNCHES



- Rotating wheel for 6 punching sizes in leather, rubber, plastic, canvas, joints and other similar material
- Easy selection and diameter hole vision to avoid errors
- Its exclusive design reduces necessary force in a 70%

		A mm	L mm	g
330021	1	90	220	260

A close-up photograph of a person's hand holding a blue and white screwdriver. The screwdriver is being used to work on a complex mechanical device, likely a car engine or a piece of industrial machinery. The device features several circular gauges with white faces and black needles, and numerous black wires and hoses connected to it. The background is blurred, showing more of the machinery and a red component. The overall scene is brightly lit, with a focus on the hand and the screwdriver.


07.

**SCREWDRIVERS
& BITS**

Manufactured in Europe

SLOTTED SCREWDRIVERS FOR ENGINEERINGS

SLOTTED SCREWDRIVERS FOR ELECTRICIANS

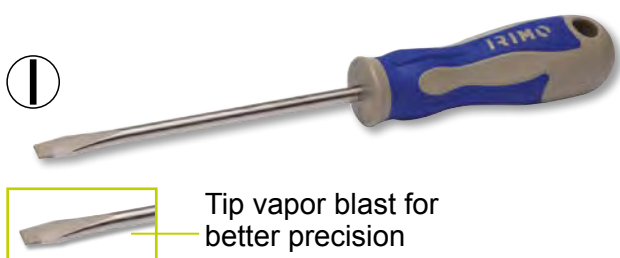

- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 2380, DIN 5265, UNE 16516

407-4-75	10	0.8	4	75	90	165	40
407-4-100	10	0.8	4	100	90	190	40
407-5.5-100	10	1	5.5	100	100	200	65
407-5.5-125	10	1	5.5	125	100	225	70
407-6.5-125	10	1.2	6.5	125	110	235	100
407-6.5-150	10	1.2	6.5	150	110	260	105
407-8-150	10	1.6	8	150	110	260	119
407-8-175	10	1.6	8	175	110	285	127
407-10-200	10	1.6	10	200	120	320	175
407-12-250	5	2	12	250	120	370	230
407-14-250	5	2.5	14	250	120	370	260

- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 2380, DIN 5265, UNE 16516

408-2.5-75	10	0.4	2.5	75	90	165	34
408-3-75	10	0.5	3	75	90	165	35
408-3-100	10	0.5	3	100	90	190	40
408-3-200	5	0.5	3	200	90	290	45
408-3.5-100	10	0.6	3.5	100	90	190	40
408-4-100	10	0.8	4	100	90	190	45
408-4-125	10	0.8	4	125	90	215	45
408-4-250	5	0.8	4	250	90	340	60
408-5.5-125	10	1	5.5	125	100	225	65
408-5.5-150	10	1	5.5	150	100	250	90
408-5.5-300	5	1	5	300	100	400	106
408-6.5-150	10	1.2	6.5	150	110	260	110

EAN code laser marked

Polypropylene & elastomer combination for perfect grip

Stripes on the elastomer avoid rolling out

Product code for easy identification

PHILLIPS SCREWDRIVERS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 8764, DIN 5262, UNE 16520

409-0-75	10	PH-0	75	90	165	35
409-1-100	10	PH-1	100	100	200	65
409-2-125	10	PH-2	125	110	235	100
409-3-150	5	PH-3	150	120	270	160
409-4-200	5	PH-4	200	120	320	200
409-1-250	5	PH-1	250	100	350	89
409-2-300	5	PH-2	300	110	410	130

STUBBY PHILLIPS SCREWDRIVERS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Standard: ISO 8764, DIN 5262, UNE 16520

409-1-25	10	PH-1	25	60	85	35
409-2-25	10	PH-2	25	60	85	35

STUBBY SLOTTED SCREWDRIVERS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Standard: ISO 2380, DIN 5265, UNE 16516

408-5.5-25	10	1.2	5.0	25	60	85	35
408-6.5-25	10	1.2	6.0	25	60	85	35

POZIDRIV SCREWDRIVERS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 8764, DIN 5262, UNE 16520

413-0-75	5	PZ-0	75	90	165	35
413-1-100	5	PZ-1	100	100	200	75
413-2-125	5	PZ-2	125	110	235	100
413-3-150	5	PZ-3	150	120	270	160
413-4-200	5	PZ-4	200	120	270	205

STUBBY POZIDRIV SCREWDRIVERS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Vapour blasted tip for greater screw-tip adherence and full anti-rust guarantee
- Standard: ISO 8764, DIN 5262, UNE 16520

413-1-25	10	PZ-1	25	60	85	35
413-2-25	10	PZ-2	25	60	85	35

SCREWDRIVERS

TORX® SCREWDRIVERS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened. Black finish tip for higher accuracy
- Size and part number are laser branded on the blade for easy identification

414-5-75	10	T-5	2.5	75	90	165	32
414-6-75	10	T-6	3	75	90	165	35
414-7-75	10	T-7	3	75	90	165	35
414-8-75	10	T-8	3	75	90	165	35
414-9-75	10	T-9	3	75	90	165	35
414-10-75	10	T-10	3	75	90	165	35
414-15-100	10	T-15	3.5	100	90	190	45
414-20-100	10	T-20	4	100	90	190	45
414-25-125	10	T-25	5	125	100	225	70
414-27-125	10	T-27	5.5	125	100	225	70
414-30-150	10	T-30	6	150	110	260	105
414-40-150	5	T-40	7	150	110	260	120
414-45-150	5	T-45	7	150	110	260	120

NUT DRIVER WITH HANDLE 1/4"



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV. Chrome-plated and entirely hardened
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 691, DIN 3125, UNE 16502

417-3.2-125	5	3.2	5.7	125	90	215	60
417-4-125	5	4	6.9	125	90	215	60
417-4.5-125	5	4.5	7.5	125	90	215	60
417-5-125	5	5	8.2	125	100	250	70
417-5.5-125	5	5.5	8.8	125	100	250	70
417-6-125	5	6	9.4	125	100	250	70
417-7-125	5	7	11.0	125	110	260	120
417-8-125	5	8	12.2	125	110	260	120
417-9-125	5	9	13.5	125	110	260	120
417-10-125	5	10	14.7	125	110	260	120
417-11-125	5	11	16.0	125	120	270	155
417-12-125	5	12	17.2	125	120	270	155
417-13-125	5	13	18.5	125	120	270	155
417-14-125	5	14	19.7	125	120	270	155

MAGNETIC BIT HOLDER FOR 1/4" BITS



- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV
- Strong magnet
- Size and part number are laser branded on the blade for easy identification

475-1/4-125	5	1/4"	125	235	112

NUT DRIVER WITH HANDLE, WITH FLEXIBLE BLADE 1/4"




- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, CrV
- Flexible blade


190-6-135	1	6	135	260	125
190-7-135	1	7	135	270	125
190-8-135	1	8	135	270	125

RATCHETING BIT HOLDER FOR 1/4" BITS

RATCHETING BIT HOLDER SCREWDRIVER FOR 1/4" BITS



RATCHETING BIT HOLDER STUBBY FOR 1/4" BITS



- Handle: 2-component handle
- Interchangeable bit storage compartment with release button for quick access
- Slide tray that keeps 12 different bits: Slotted 4, 5, 6 mm; PH 1, 2, 3; TORX® 15, 20, 25; Hex 3, 4, 5 mm
- Magnetic blade secures bit in screwdriver
- Smooth ratcheting stroke
- Three position ratchet mechanism: forward, reverse and neutral

475R-1/4-110	6	1/4"	110	125	235	310

- Ratcheting bit holder stubby for 1/4" bits
- Handle: 2-component handle
- Interchangeable bit storage
- 6 double ended bits: Slotted 5.0, 6.0; PH1, PH2; T15, T20, T25, T30; Hex 2.5, 3, 4, 5 mm
- Magnetic blade secures bit in screwdriver
- Smooth ratcheting stroke, three position ratchet mechanism
- Presented in a blister packaging

475R-1/4-30	6	1/4"	30	80	110	192

INSULATED SCREWDRIVER, 1000V



**Manufactured
in Europe**


SLOTTED INSULATED 1000V SCREWDRIVERS

IEC 60900  1000V   



PHILLIPS INSULATED 1000V SCREWDRIVERS

IEC 60900  1000V   

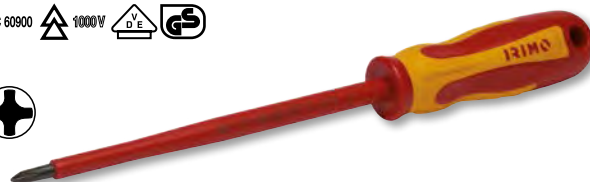

- For work on live equipment, up to 1000V
- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, insulation moulded directly onto blade. Black finish tip for higher accuracy
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 2380

							
408V-2.5-100	10	0.4	2.5	100	90	165	20
408V-3-100	10	0.5	3	100	90	190	22
408V-3.5-100	10	0.6	3.5	100	90	190	32
408V-4-100	10	0.8	4	100	90	190	35
408V-5.5-125	10	1	5.5	125	100	225	65
408V-6.5-150	10	1.2	6.5	150	110	260	90
408V-8-175	5	1.2	8	175	120	295	110

- For work on live equipment, up to 1000V
- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, insulation moulded directly onto blade. Black finish tip for higher accuracy
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 8764

					
409V-0-100	10	PH-0	100	90	190
409V-1-150	10	PH-1	150	100	260
409V-2-175	10	PH-2	175	110	285
409V-3-200	5	PH-3	200	120	320

POZIDRIV INSULATED 1000V SCREWDRIVERS

IEC 60900  1000V  

- For work on live equipment, up to 1000V
- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, insulation moulded directly onto blade. Black finish tip for higher accuracy
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 8764

					
413V-0-100	10	PZ-0	100	90	190 40
413V-1-150	10	PZ-1	150	100	260 80
413V-2-175	10	PZ-2	175	110	285 120
413V-3-200	5	PZ-3	200	120	320 180

TORX® INSULATED 1000V SCREWDRIVERS

IEC 60900  1000V  


- For work on live equipment, up to 1000V
- 2-component handle with hanging hole
- Blade is made of high performance alloy steel, insulation moulded directly onto blade. Black finish tip for higher accuracy
- Size and part number are laser branded on the blade for easy identification
- Standard: ISO 8764

					
414V-10-100	10	T-10	100	90	190 320
414V-15-125	10	T-15	125	100	225 650
414V-20-125	10	T-20	125	100	225 750
414V-25-150	10	T-25	150	110	360 900

TWIN PACK INSULATED SCREWDRIVERS + TESTER

IEC 60900  1000V  


- Screwdriver set, 3 pcs
- Includes 2 screwdrivers and 1 main tester 150V-250V
- For slotted and Phillips head screws

				
459V-3-1	1	3	35x130x310	35
408V-4-100				
409V-1-150				
429-03-1				

INSULATED 1000V SCREWDRIVER SET, 6 pieces


IEC 60900  1000V  

- Screwdriver set of 6 pieces
- For slotted and Phillips head screws
- In cardboard box

				
459V-6-C	1	6	42x325x160	580
408V-2.5-100, 408V-4-100, 408V-5.5-125, 408V-6.5-150				
409V-1-150, 409V-2-175				

SCREWDRIVER SETS


SCREWDRIVER SET, 6 pieces



- For slotted and Phillips head screws
- In cardboard box

459-6-C	1	6	42x325x160	570
408-3-75, 408-4-100				
407-5.5-125, 407-6.5-150				
409-1-100, 409-2-125				


SCREWDRIVER SET FOR ENGINEERINGS, 6 pieces



- For slotted and Pozidriv head screws
- In cardboard box

459-6A-C	1	6	42x325x160	570
408-3-75, 408-4-100				
407-5.5-125, 407-6.5-150				
413-1-100, 413-2-125				

SCREWDRIVER SET, 5 pieces



- For slotted and Phillips head screws
- In clamshell packaging

459-5-B	1	5	48x190x335	435
408-3-75, 408-4-100				
407-6.5-150				
409-1-100, 409-2-125				

SCREWDRIVER SET, 6 pieces



- For TORX® head screws
- In cardboard box

459-6B-C	1	6	42x325x160	470
414-10-75, 414-15-100, 414-20-100, 414-25-125, 414-27-125, 414-30-150				

SCREWDRIVER SET FOR ELECTRICIANS, 6 pieces



- For slotted and Phillips head screws
- In cardboard box

IRIMO				
459-6C-C	1	6	42x325x160	505
408-3-100, 408-4-125, 408-5.5-150			①	
409-1-100, 409-2-125			⊕	
429-03-1			①	

T-HANDLE SCREWDRIVERS



T-HANDLE WITH HEXAGONAL TIP



- Blade is made of high quality steel. Black finish
- The long blade allows to apply a controlled torque and provides an easy access to screws requiring depth
- The short 90° blade is used for extreme torque or to work in areas where height is limited
- Size and part number are laser branded on the blade for easy identification
- Rotating cap in the handle that allows a fast finger movement during turning reducing tightening time

IRIMO						
42-H2-100	5	2	130	100	64x30	23
42-H2.5-100	5	2.5	130	100	64x30	25
42-H3-100	5	3	130	100	64x30	28
42-H4-150	5	4	190	150	80x40	57
42-H5-150	5	5	190	150	80x40	70
42-H6-200	5	6	250	200	100x50	134
42-H8-200	5	8	250	200	100x50	186
42-H10-200	5	10	250	200	100x50	254

T-HANDLE SCREWDRIVERS

T-HANDLE WITH TORX® TIP



- Blade is made of high quality steel. Black finish
- The long blade allows to apply a controlled torque and provides an easy access to screws requiring depth
- The short 90° blade is used for extreme torque or to work in areas where height is limited
- Size and part number are laser branded on the blade for easy identification
- Rotating cap in the handle that allows a fast finger movement during turning reducing tightening time

46-T10-100	5	T10	2.72	130	100	64x30	27
46-T15-150	5	T15	3.26	190	150	80x40	55
46-T20-150	5	T20	3.84	190	150	80x40	55
46-T25-150	5	T25	4.40	190	150	80x40	66
46-T30-200	5	T30	5.49	250	200	100x50	126
46-T40-200	5	T40	6.60	250	200	100x50	147

T-HANDLE SCREWDRIVERS, NUT DRIVER



- Blade is made of high quality steel
- Size and part number are laser branded on the blade for easy identification
- Rotating cap in the handle that allows a fast finger movement during turning reducing tightening time

191-6-150	5	6	190	150	69x40	78	
191-7-175	5	7	225	175	84x50	121	
191-8-175	5	8	225	175	84x50	123	
191-10-175	5	10	225	175	84x50	160	
191-12-175	5	12	225	175	84x50	167	
191-13-175	5	13	225	175	84x50	172	

T-HANDLE WITH HEXAGONAL BALL TIP



- Blade: high quality steel. Black finish
- The long blade allows to apply a controlled torque and provides an easy access to screws requiring depth
- The short 90° blade is used for extreme torque or to work in areas where height is limited
- Ball end allows to easily insert the tip in the screw head from a range of angles
- More efficient and time saving than a standard T Handle
- Branding: size and part number laser branded in the blade for easier identification

42B-H3-100	5	3	130	100	64x30	28	
42B-H4-150	5	4	190	150	80x40	57	
42B-H5-150	5	5	190	150	80x40	70	
42B-H6-200	5	6	250	200	100x50	134	
42B-H8-200	5	8	250	200	100x50	186	
42B-H10-200	5	10	250	200	100x50	254	

HEX BALL END T HANDLE SET, 6 pieces



- T-handle hexagonal ball tip, 6 pcs
- In clamshell packaging

42B-6-B	1	6	355x247x40			120	

42B-H10-200, 42B-H3-100, 42B-H4-150, 42B-H5-150, 42B-H6-200, 42B-H8-200

6 IN 1 SCREWDRIVER



- Double ended bits (6.35x65 mm): PH1 - 5 mm
- Double ended bits (8x75 mm): PH2 - 6 mm
- Nut Driver: 6 mm - 8 mm

475-5-1	1	1/4" / 5/16"	50	110	160	312

REVERSIBLE SCREWDRIVER



- Impact resistant plastic handle
- Blade is made of high performance alloy steel. Nickel plated blade

427411	10	1.2	6	PH-2	156	26

MAGNETISER



- For magnetizing and demagnetizing different tools
- Simple and easy to use small devise
- Material: magnet, plastic
- Packaging: in blister pack

458-02-1	5	53x50x30	164

PRECISION SCREWDRIVER

PRECISION SCREWDRIVER SET, 6 pieces



- Precision screwdriver set, 6 pcs
- Chrome Vanadium steel blades
- Chrome plated finish and black tips
- Free turning caps for easy and accurate driving
- Sliding system of the plastic frame to open and release
- Sizes included:
 - 4 slotted: 1.6-2.0-2.5-3.0 mm
 - 2 Phillips: PH00-PH0

IRIMO	Box	Qty	Length (mm)	Tip (mm)	Weight (g)
461-6-B	1	6	150	50	120

POCKET PRECISION SCREWDRIVER



- 4 ends tips: PH0 / 3 mm and PH1/4 mm
- Satin finish, head treated bits
- Easy carrying pen size with clip

IRIMO	Box	Tip	Length (mm)	Tip (mm)	Weight (g)
478-4-1	1	PH0/PH1	120	3.0/4.0	20
478-4-2	48	PH0/PH1	120	3.0/4.0	1.100

VOLTAGE TESTER



429-03-1
429-04-1



429-10-1

- Handle: clear transparent plastic handle, impact resistant
- Blade: high quality steel, nickel plated blade, plastic protection up to the tip
- According to DIN VDE0680/6 GS-marked
- 429-10-1: Auto tester 6-24-V

IRIMO	Box	Length (mm)	Tip (mm)	Tip (mm)	Tip (mm)	Tip (mm)	Weight (g)
429-03-1	6	0.6	3.0	65	75	140	30
429-04-1	6	–	3.5	100	90	190	29
429-10-1	6	–	3.0	45	75	120	22

NICKEL PLATED KEYS FOR HEX SCREWS

NICKEL PLATED KEYS, METRIC



- High quality steel, entirely hardened
- Nickel plated
- Size stamped on the blade for easy identification
- Standard: ISO 2936

			a mm	b mm	
040001	10	1.5	15	47	1
040011	10	2.0	18	52	1
040021	10	2.5	21	59	3
040031	10	3.0	23	66	4
040041	10	4.0	29	74	10
040051	10	5.0	33	85	18
040061	10	6.0	38	96	29
040071	10	7.0	41	102	41
040081	10	8.0	44	108	57
040091	5	9.0	47	114	76
040101	5	10.0	50	122	100
040121	5	12.0	57	137	163
040141	1	14.0	70	154	253
040171	1	17.0	80	177	427
040191	1	19.0	89	199	600
040221	1	22.0	102	222	910

NICKEL PLATED KEYS, INCHES



- High quality steel, entirely hardened
- Nickel plated
- Size stamped on the blade for easy identification
- Standard: ISO 2936

			a mm	b mm	
040541	10	1/16"	15	47	1
040011	10	5/64"	18	52	1
040561	10	3/32"	21	59	3
040581	10	1/8"	23	66	4
040041	10	5/32"	29	74	10
040601	10	3/16"	33	85	18
040611	10	7/32"	35.5	91	29
040621	10	1/4"	38	96	32
040641	10	5/16"	44	108	60
040661	5	3/8"	50	122	100
040681	5	7/16"	53	129	140
040701	5	1/2"	63	145	182
040731	1	5/8"	76	168	370
040191	1	3/4"	89	199	601

NICKEL PLATED KEYS SETS, METRIC



- In plastic wallet
- Sizes marked at the top of the wallet, for an easy identification
- Hanging hole

IRIMO	mm	g
041011	1 6 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 mm	76
041071	1 8 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0 mm	180
041021	1 10 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 10, 12 mm	380
041091	1 11 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0, 10, 12 mm	570
041031	1 13 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 10, 12, 14, 17, 19 mm	1.800
041101	1 15 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0, 10, 12, 14, 17, 19, 22 mm	2.920

NICKEL PLATED KEYS SETS, INCHES



- In plastic wallet
- Sizes marked at the top of the wallet, for an easy identification
- Hanging hole

IRIMO	in	g
041041	1 5 1/8, 5/32, 3/16, 7/32, 1/4"	95
041051	1 9 1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 7/16, 1/2"	580
041061	1 12 1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4"	1.865

NICKEL PLATED KEYS FOR HEX SCREWS

OFFSET SCREWDRIVER SET, 3 pieces



- 3 pieces with double tips (Slotted & Phillips)
- Chrome plated keys set for hex screws, in metric
- Content: Slotted (5.0, 6.0, 8.0 mm); Phillips (PH1, PH2, PH3)
- Packaging: in blister pack



420-3-1



1



3



20x230x100



202

CHROME PLATED KEYS FOR HEX SCREWS, LONG

CHROME PLATED BLADE SET FOR HEX SCREWS, LONG BALL END METRIC



- Set of long ball end hex keys, 9 pieces, metric
- In plastic holder with hanging hole
- Sizes marked at the top of the lid, for an easy identification
- In blister packaging



48-9C-H



1



9




1.5-2-2.5-3-4-5-6-8-10 mm



360

BLACK KEYS FOR HEX SCREWS

BLACK KEYS, METRIC



- High quality steel, entirely hardened
- Black finish
- Size stamped on the blade for easy identification
- Standard: ISO 2936



045001



10



1.5

a

15

b

47



1

045011

10

2.0

18

52

2

045021

10

2.5

21

59

3

045031

10

3.0

23

66

4

045041

10

4.0

29

74

10

045051

10

5.0

33

85

13

045061

10

6.0

38

95

29

045071

10

7.0

41

102

41

045081

10

8.0

44

105

57

045091

5

9.0

47

114

76

045101

5

10.0

50

122

100

045121

5

12.0

57

137

163

045141

1

14.0

70

154

253

045171

1

17.0

80

177

427

045191

1

19.0

89

199

600

045221

1

22.0


102

222

910

BLACK KEYS FOR HEX SCREWS

BLACK KEYS, METRIC

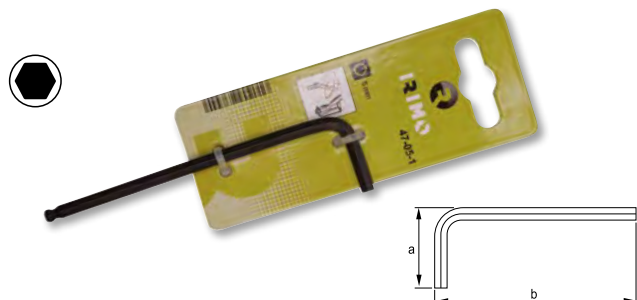

- High quality steel, entirely hardened
- Black finish
- Size stamped on the blade for easy identification
- Standard: ISO 2936

IRIMO			a mm	b mm	g
45-00-1	1	1.5	14.5	45.5	5.4
45-01-1	1	2.0	27.0	51.0	6.4
45-02-1	1	2.5	19.5	55.5	7.5
45-03-1	1	3.0	22.0	64.0	9.4
45-04-1	1	4.0	28.0	72.0	14.4
45-05-1	1	5.0	22.0	83.0	22.4
45-06-1	1	6.0	38.0	94.0	33.8
45-08-1	1	7.0	37.0	105.0	63.8
45-10-1	1	10.0	49.0	119.0	107.3

BLACK KEYS SETS, METRIC



- In plastic wallet
- Sizes marked at the top of the wallet, for an easy identification
- Hanging hole

IRIMO				g
046011	1	6	2.0, 2.5, 3.0, 4.0, 5.0, 6.0 mm	76
046021	1	10	2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 10, 12 mm	180
046091	1	11	2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0, 10, 12 mm	460
046031	1	13	2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 10, 12, 17, 19 mm	1.805
046101	1	15	2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0, 9.0, 10, 12, 14, 17, 19, 22 mm	2.830

BLACK KEYS SETS, METRIC



- Set of black finish hex keys, 9 pieces, metric
- In plastic holder with hanging hole
- Sizes marked at the top of the wallet, for an easy identification
- In blister packaging

IRIMO				g
46-9-H	1	9	1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm	270

BLACK KEYS SETS, METRIC




- Set of black finish hex keys, 8 pieces, metric
- In high quality impact resistant folder
- Allows many different working positions
- Positive stop at 270° degrees, for maximum leverage
- Easy to store
- Retail packaging with hanger

IRIMO				g
46-8-F	1	8	1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0 mm	160

BLACK KEYS FOR HEX SCREWS

BLACK KEYS, INCHES



- High quality steel, entirely hardened
- Black finish
- Size stamped on the blade for easy identification
- Standard: ISO 2936

			a mm	b mm	g
045541	10	1/16"	15	47	1
045011	10	5/64"	18	52	2
045561	10	3/32"	21	59	3
045581	10	1/8"	23	66	5
045041	10	5/32"	29	74	10
045601	10	3/16"	33	85	16
045611	10	7/32"	35.5	91	24
045621	10	1/4"	38	96	32
045641	10	5/16"	44	105	60
045661	5	3/8"	50	122	100
045681	5	7/16"	53	129	140
045701	5	1/2"	63	145	182
045731	1	5/8"	76	168	370
045191	1	3/4"	89	199	601

BLACK KEYS SETS, INCHES



- In plastic wallet
- Sizes marked at the top of the wallet, for an easy identification
- Hanging hole



046041	1	5	1/8, 5/32, 3/16, 7/32, 1/4"		95
046051	1	9	1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 7/16, 1/2"		580
046061	1	12	3/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4"		1.865

BLACK KEYS FOR HEX SCREWS, LONG


BLACK KEYS, METRIC LONG



- High quality steel, entirely hardened
- Black finish
- Size laser marking on the blade for an easy identification
- Long arm provides higher torque transmission and accessibility
- Standard: ISO 2936

			a mm	b mm	g
045801	10	1.5	15	91	1
045811	10	2.0	18	102	3
045821	10	2.5	21	114	5
045831	10	3.0	23	129	8
045841	10	4.0	29	144	17
045851	10	5.0	33	165	31
045861	10	6.0	38	186	51
045871	10	7.0	41	197	64
045881	5	8.0	44	208	100
045891	5	9.0	47	219	134
045901	5	10.0	50	234	175
045921	2	12.0	57	262	283
045941	2	14.0	70	294	439


LONG BALL END, METRIC

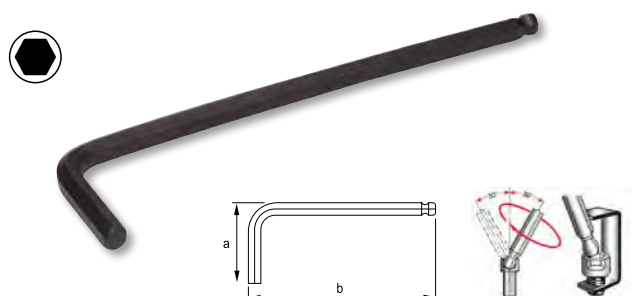

- High quality steel, entirely hardened. Black finish
- Size laser marking on the blade for an easy identification
- Long arm provides higher torque transmission and accessibility
- Ball end allows to easily insert the key in the screw head from a range of angles
- More efficient and time saving than a standard hex key
- Standard: ISO 2936

			a mm	b mm	g
047001	10	1.5	15	91	1
047011	10	2.0	18	102	3
047021	10	2.5	21	114	5
047031	10	3.0	23	129	8
047041	10	4.0	29	144	17
047051	10	5.0	33	165	31
047061	10	6.0	38	186	50
047081	10	8.0	44	208	100
047101	5	10.0	50	234	171
047121	2	12.0	57	262	275

LONG BALL END, METRIC

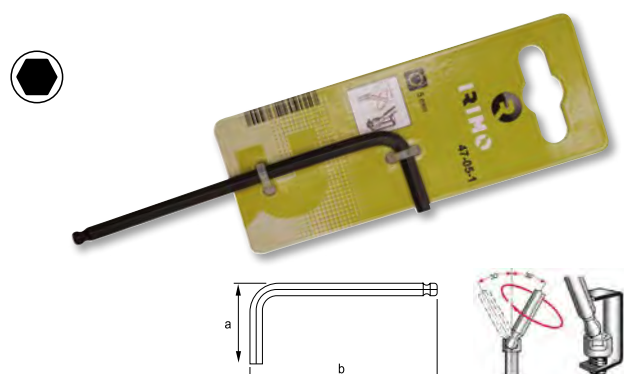

- High quality steel, entirely hardened. Black finish
- Size laser marking on the blade for an easy identification
- Long arm provides higher torque transmission and accessibility
- Ball end allows to easily insert the key in the screw head from a range of angles
- More efficient and time saving than a standard hex key
- Standard: ISO 2936

			a mm	b mm	g
47-00-1	1	1.5	14.5	62.5	6.0
47-01-1	1	2.0	17.0	76.0	7.2
47-02-1	1	2.5	19.5	85.5	8.8
47-03-1	1	3.0	22.0	91.0	11.0
47-04-1	1	4.0	28.0	102.0	17.6
47-05-1	1	5.0	32.0	118.0	28.0
47-06-1	1	6.0	37.0	139.0	44.4
47-08-1	1	8.0	43.0	155.0	82.6
47-10-1	1	10.0	49.0	177.0	144.0

LONG BALL END, METRIC



- Set of long ball end hex keys, 9 pieces, metric
- In plastic holder with hanging hole
- Sizes marked at the top of the lid, for an easy identification
- In blister packaging

48-9-H	1	9	1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm	360

LONG BALL END, INCHES



- Set of long ball end hex keys, 13 pieces
- In plastic holder with hanging hole
- Sizes marked at the top of the lid, for an easy identification
- In blister packaging

48A-13-H	1	9	0.05-1/16-5/64-3/32-7/64-1/8-9/64-5/32-3/16-7/32-1/4-5/16-3/8"	360

BLACK KEYS FOR TORX® SCREWS


BLACK KEYS FOR TORX® SCREWS



- High quality steel, entirely hardened
- Black finish
- Size laser marking on the blade for an easy identification
- Long arm provides higher torque transmission and accessibility

Q			a mm	b mm	g
457061	5	T-6	15	75	4
457071	5	T-7	16	80	4
457081	5	T-8	16	80	5
457091	5	T-9	16	80	5
457101	5	T-10	17	86	6
457151	5	T-15	18	90	10
457201	5	T-20	19	95	11
457251	5	T-25	20	100	17
457271	5	T-27	21	105	19
457301	5	T-30	24	114	29
457401	5	T-40	26	124	43
457451	5	T-45	29	133	61
457501	5	T-50	32	152	88

BLACK KEYS FOR TORX® SCREWS

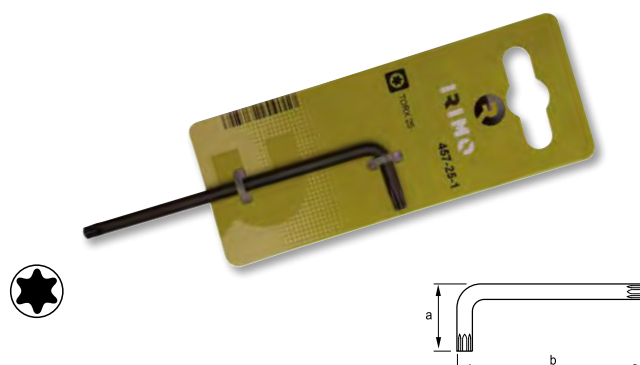

- High quality steel, entirely hardened
- Black finish
- Size laser marking on the blade for an easy identification
- Long arm provides higher torque transmission and accessibility

Q			a mm	b mm	g
457-10-1	1	T10	17	86	10.0
457-15-1	1	T15	18	90	12.2
457-20-1	1	T20	19	95	15.2
457-25-1	1	T20	20	100	18.8
457-27-1	1	T27	21	105	23.2
457-30-1	1	T30	24	114	28.0
457-40-1	1	T40	26	124	48.2
457-45-1	1	T45	29	133	66.4
457-50-1	1	T50	32	152	94.2

BLACK KEY SET FOR TORX® SCREWS



- Set of long black finish offset screwdrivers for TORX® head screws, 9 pieces
- All sizes marked on the holder for an easy selection
- Hanging hole
- In blister packaging

Q					g
458-9-H	10	9	T10, T15, T20, T25, T27, T30, T40, T45, T50		290

BLACK KEY SET FOR TORX® SCREWS




- Set of black finish offset screwdrivers for TORX® head screws, 8 pieces
- Impact resistant holder
- Allows many different working positions
- Positive stop at 270° degrees, for maximum leverage
- In blister packaging

Q					g
458-8-F	1	8	T9, T10, T15, T20, T25, T27, T30, T40		160

BLACK KEYS FOR TORX® TAMPER RESISTANT SCREWS

BLACK KEYS FOR TORX® TAMPER RESISTANT SCREWS

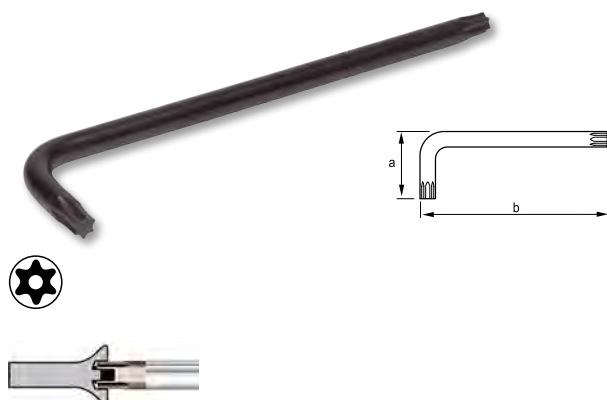

- High quality steel, entirely hardened
- Black finish
- Size laser marking on the blade for easy identification
- Long arm provides higher torque transmission and accessibility

Part No.	Qty	Size	a mm	b mm	Ø mm	g
454091	5	TR9	16	80	3.0	4
454101	5	TR10	17	86	3.0	5
454151	5	TR15	18	90	4.0	8
454201	5	TR20	19	95	4.0	11
454251	5	TR25	20	100	5.0	17
454271	5	TR27	21	105	5.0	19
454301	5	TR30	24	114	6.0	29
454401	5	TR40	26	124	7.0	43

BLACK KEY SETS FOR TORX® TAMPER RESISTANT SCREWS



- Set of long black finish offset screwdrivers for TORX® tamper head screws, 9 pieces
- All sizes marked on the holder for an easy selection
- Hanging hole
- In blister packaging

Part No.	Qty	Size	g
454-9-H	10	9	290

BLACK KEY SETS FOR TORX® TAMPER RESISTANT SCREWS



- Set of black finish offset screwdrivers for TORX® tamper head screws, 8 pieces
- Impact resistant holder
- Allows many different working positions
- Positive stop at 270° degrees, for maximum leverage
- In blister packaging

Part No.	Qty	Size	g
454-8-F	1	8	160

1/4" BITS

1/4" BITS FOR SLOTTED SCREWS, 25 MM



x 10



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 10 pieces

IRIMO					
475-4-1	1	0.5	4.0	25	35
475-4.5-1	1	0.6	4.5	25	35
475-5.5-1	1	0.8	5.5	25	35
475-6.0-1	1	1.0	6.0	25	35
475-6.5-1	1	1.2	6.5	25	35
475-8.0-1	1	1.6	8.0	25	35

1/4" BITS SLOTTED SCREWS, 70 MM



x 5



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 5 pieces

IRIMO					
475-70-3.0-1	1	0.5	3.0	70	70
475-70-3.5-1	1	0.6	3.5	70	70
475-70-5.5-1	1	0.8	5.5	70	77
475-70-6.5-1	1	1.2	6.5	70	80

1/4" BITS FOR PHILLIPS SCREWS, 25 MM



x 10



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 10 pieces

IRIMO					
475-PH0-1	1	PH-0	25	35	
475-PH1-1	1	PH-1	25	35	
475-PH2-1	1	PH-2	25	35	
475-PH3-1	1	PH-3	25	35	

1/4" BITS FOR PHILLIPS SCREWS, 50 MM



x 5



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 5 pieces

IRIMO					
475-50PH1-1	1	PH-1	50	70	
475-50PH2-1	1	PH-2	50	70	
475-50PH3-1	1	PH-3	50	77	

1/4" BITS FOR PHILLIPS SCREWS, 70 MM



x 5



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 5 pieces

IRIMO					
475-70PH1-1	1	PH-1	70	70	
475-70PH2-1	1	PH-2	70	70	
475-70PH3-1	1	PH-3	70	77	

1/4" BITS FOR PHILLIPS SCREWS, 89 MM



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 5 pieces

475-89PH1-1	1	PH-1	89	100
475-89PH2-1	1	PH-2	89	100
475-89PH3-1	1	PH-3	89	110

1/4" BITS FOR PHILLIPS SCREWS, 150 MM



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box for 5 pieces

475-150PH1-1	1	PH-1	150	150
475-150PH2-1	1	PH-2	150	150


1/4" BITS FOR PHILLIPS DRY WALL SCREWS, 25 MM



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: Grabber bits for drywall screws
- With reduced nose diameter 4.8 mm
- In plastic box of 10 pieces

475-PH2G-1	1	PH-2G	25	35

1/4" BITS FOR POZIDRIV SCREWS, 25 MM

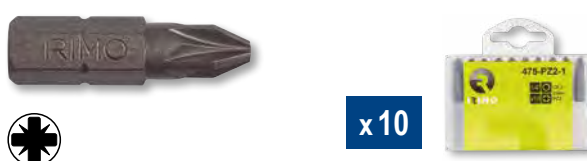

- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 10 pieces

475-PZ0-1	1	PZ-0	25	35
475-PZ1-1	1	PZ-1	25	35
475-PZ2-1	1	PZ-2	25	35
475-PZ3-1	1	PZ-3	25	35

1/4" BITS FOR POZIDRIV SCREWS, 50 MM



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-50PZ1-1	1	PZ-1	50	70
475-50PZ2-1	1	PZ-2	50	70
475-50PZ3-1	1	PZ-3	50	77

1/4" BITS

1/4" BITS FOR POZIDRIV SCREWS, 70 MM



x5



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-70PZ1-1	1	PZ-1	70	70
475-70PZ2-1	1	PZ-2	70	70
475-70PZ3-1	1	PZ-3	70	77

1/4" BITS FOR POZIDRIV SCREWS, 89 MM



x5



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-89PZ1-1	1	PZ-1	89	100
475-89PZ2-1	1	PZ-2	89	100
475-89PZ3-1	1	PZ-3	89	110

1/4" BITS FOR POZIDRIV SCREWS, 150 MM



x5



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-150PZ1-1	1	PZ-1	150	150
475-150PZ2-1	1	PZ-2	150	150

1/4" BITS FOR TORX® SCREWS, 25 MM



x10



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 10 pieces
(T30/T40 packed in box of 5 pieces)

475-T5-1	1	T5	1.70	25
475-T6-1	1	T6	1.70	25
475-T7-1	1	T7	1.99	25
475-T8-1	1	T8	2.31	25
475-T9-1	1	T9	2.50	25
475-T10-1	1	T10	2.74	25
475-T15-1	1	T15	3.27	25
475-T20-1	1	T20	3.86	25
475-T25-1	1	T25	4.43	25
475-T27-1	1	T27	4.99	25
475-T30-1	1	T30	5.52	25
475-T40-1	1	x5 T40	6.65	25
475-T45-1	1	x5 T45	7.90	25
475-T50-1	1	T50	7.94	25

1/4" BITS FOR TORX® SCREWS, 50 MM



x5



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-50T6-1	1	T6	1.70	50
475-50T8-1	1	T8	2.51	50
475-50T10-1	1	T10	2.74	50
475-50T15-1	1	T15	3.27	50
475-50T20-1	1	T20	3.86	50
475-50T25-1	1	T25	4.43	50
475-50T30-1	1	T30	5.52	50
475-50T40-1	1	T40	6.65	50

1/4" BITS FOR TORX® SCREWS, 89 MM



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-89T10-1	1	T10	2.74	89	80
475-89T15-1	1	T15	3.27	89	85
475-89T20-1	1	T20	3.86	89	90
475-89T25-1	1	T25	4.43	89	100
475-89T27-1	1	T27	4.99	89	100
475-89T30-1	1	T30	5.52	89	110
475-89T40-1	1	T40	6.65	89	120

1/4" BITS FOR TORX® SCREWS, 150 MM



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-150T10-1	1	T10	2.74	150	150
475-150T15-1	1	T15	3.27	150	150
475-150T20-1	1	T20	3.86	150	153
475-150T25-1	1	T25	4.43	150	155
475-150T30-1	1	T30	5.52	150	157
475-150T40-1	1	T40	6.65	150	160

1/4" BITS FOR TORX® TAMPER SCREWS, 25 MM



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- TORX® tamper resistant screws have a centre pin to prevent a standard TORX® driver to be inserted
- In plastic box of 5 pieces

475-TR10-1	1	T10	2.74	25	35
475-TR15-1	1	T15	3.27	25	35
475-TR20-1	1	T20	3.86	25	35
475-TR25-1	1	T25	4.43	25	35
475-TR27-1	1	T27	4.99	25	35
475-TR30-1	1	T30	5.52	25	40
475-TR40-1	1	T40	6.65	25	50

1/4" BITS FOR HEXAGONAL SCREWS, 25 MM



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- In plastic box of 5 pieces

475-H3-1	1	3	25	30	
475-H4-1	1	4	25	35	
475-H5-1	1	5	25	40	
475-H6-1	1	6	25	45	

1/4" BITS

TORSION BIT FOR PHILLIPS HEAD SCREWS,
25 MM

x5



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: steel grey surface coated with clear lacquer for rust protection
- Material: high performance alloy steel
- Application: torsion bits are suitable for hard material applications
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life
- In plastic box of 10 pieces

R				
			L mm	g
475T-PH1-1	1	PH-1	25	30
475T-PH2-2	1	PH-2	25	40
475T-PH3-2	1	PH-3	25	40

TORSION BIT FOR POZIDRIV HEAD SCREWS,
25 MM

x5



- Drive: 1/4" DIN 3126-C6.3,ISO 1173
- Finish: steel grey surface coated with clear lacquer for rust protection
- Material: high performance alloy steel
- Application: torsion bits are suitable for hard material applications
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life
- In plastic box of 10 pieces

R				
			L mm	g
475T-PZ1-1	1	PZ-1	25	30
475T-PZ2-2	1	PZ-2	25	40
475T-PZ3-2	1	PZ-3	25	40

DIAMOND BIT FOR PHILLIPS HEAD SCREWS,
25 MM

x5



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: gold coloured diamond coating
- Material: high performance alloy steel
- Application: high performance in any application
- Minimises the cam-out effect reducing "down-time"
- Reduces wear of bit and screw
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life
- In plastic box of 5 pieces

R				
			L mm	g
475D-PH1-1	1	PH-1	25	30
475D-PH2-1	1	PH-2	25	40
475D-PH3-1	1	PH-3	25	40

DIAMOND BIT FOR POZIDRIV HEAD SCREWS,
25 MM

x5



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: gold coloured diamond coating
- Material: high performance alloy steel
- Application: high performance in any application
- Minimises the cam-out effect reducing "down-time"
- Reduces wear of bit and screw
- Torsion zone that absorbs torque peaks avoiding premature wear and tear and improving service life
- In plastic box of 5 pieces

R				
			L mm	g
475D-PZ1-1	1	PZ-1	25	30
475D-PZ2-1	1	PZ-2	25	40
475D-PZ3-1	1	PZ-3	25	40

1/4" POWER MAGNETIC NUT DRIVER, METRIC



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- With strong magnet
- Hexagon socket
- In plastic holder (1 piece)

				mm	mm	g
474M-5.5-1	1	5.5	1/4"	11.5	50	25
474M-6-1	1	6	1/4"	11	50	21
474M-7-1	1	7	1/4"	12	50	28
474M-8-1	1	8	1/4"	12.5	50	24
474M-9-1	1	9	1/4"	13.5	50	31
474M-10-1	1	10	1/4"	15.5	50	36
474M-11-1	1	11	1/4"	18.4	50	30
474M-12-1	1	12	1/4"	14.5	50	34
474M-13-1	1	13	1/4"	17	50	40

1/4" POWER MAGNETIC NUT DRIVER SET



- Drive: 1/4" DIN 3126 E 6.3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- With strong magnet
- Hexagon socket. In blister packaging

				g
474M-5-H	1	5	70x20x45	134

474M-5.5-1, 474M-7-1, 474M-8-1, 474M-10-1, 474M-13-1

1/4" POWER MAGNETIC NUT DRIVER, INCHES



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- With strong magnet
- Hexagon socket
- In plastic holder (1 piece)

				mm	mm	g
474M-1/4-1	1	1/4"	1/4"	11	50	21
474M-3/8-1	1	3/8"	1/4"	14.3	50	31

1/4" POWER NUT DRIVER WITH RETAINING RING



- Drive: 1/4" DIN 3126-E 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Application: for all screw applications in trade and industry
- Hexagon socket
- In plastic holder (1 piece)

				mm	mm	g
474MR-8-1	1	8	1/4"	12.5	50	24
474MR-10-1	1	10	1/4"	13.5	50	36

1/4" BITS

ADAPTOR 1/4", 25 MM



- Drive: 1/4" DIN 3126-A 6.3, ISO 1173
- Finish: black finish
- Material: high performance alloy steel
- Hexagonal male to square male DIN3120
- In plastic bag (1 piece)
- Retail package

475A-25-1	1	1/4"	1/4"	25	5

ADAPTOR 1/4", 50 MM



- Drive: 1/4" DIN 3126-A 6.3, ISO 1173
- Finish: black finish
- Material: high performance alloy steel
- Hexagonal male to square male DIN3120
- In plastic holder (1 piece)

475A-50-1	1	1/4"	1/4"	50	18
475A-50-1/2-1	1	1/2"	1/4"	50	25

UNIVERSAL HOLDER 1/4"



- Drive: 1/4" DIN 3126-E 6.3, ISO 1173
- Finish: black finish
- Material: high performance alloy steel
- With strong magnet
- DIN 3126 D 6.3
- In plastic holder (1 piece)

475A-M-50-1	1	1/4"	1/4"	50	20
475A-M-75-1	1	1/4"	1/4"	75	35
475A-M-150-1	1	1/4"	1/4"	150	47

QUICK RELEASE BIT HOLDER 1/4"



- Drive: DIN 3126-E 6.3, ISO 1173
- Material: high performance alloy steel
- DIN 3126 D 6.3
- With permanent magnet
- In plastic holder (1 piece)

475A-60QR-1	1	1/4"	1/4"	14	60	15
475A-75QR-1	1	1/4"	1/4"	14	75	33

1/4" BITS SETS

1/4" BITS SETS




x 32



- Drive: 1/4" DIN 3126-C 6,3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- Display: 475-32-8 Disp 8 sets in blister packaging

475-32-1	1	32	30 x 105 x 65	275
475-32-8DISP	1	8	360 x 340 x 260	2.240
475-4.5-1, 475-4-1, 475-5.5-1				①
2x 475-PH1-1, 2x 475-PH2-1, 2x 475-PH3-1				⊕
475-PH2G-1				⊕
2x 475-PZ1-1, 2x 475-PZ2-1, 2x 475-PZ3-1				⊗
475-T10-1, 2x 475-T15-1, 2x 475-T20-1, 2x 475-T25-1, 475-T27-1, 2x 475-T30-1, 475-T40-1				⊗
475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1				⊗
475A-25-1				⊗
105-48-1				⊗
475A-60QR-1				⊗

1/4" BITS SETS

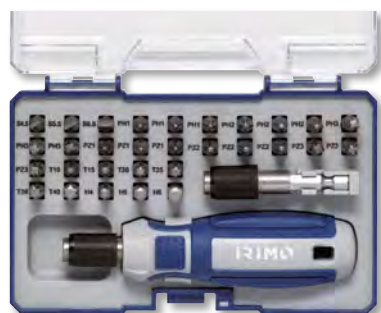

x 32



- Bits set of 32 pieces: 30 bits, 1 magnetic quick release bit holder and bit holding screwdriver for interchangeable bits
- 1/4" hexagon drive. DIN 3126, ISO 1173, style C 6.3
- Lock-in type system for easy and safety lock, magnetic. The bit stays caught until the release is driven
- Robust and tough bits
- Quick release bit holder with strong magnet (style E 6.3)
- Sand blasting finish bits
- Robust plastic case with hanger. Transparent lid
- For universal use
- High performance alloy steel
- In blister packaging

475-32A-1	6	153 x 35 x 100	375
475A-60QR-1			⊗
475-4.5-1, 475-5.5-1, 475-6.5-1			①
3x 475-PH1-1, 3x 475-PH2-1, 3x 475-PH3-1			⊕
3x 475-PZ1-1, 3x 475-PZ2-1, 3x 475-PZ3-1			⊗
475-H4-1, 475-H5-1, 475-H6-1			⊗
475-T10-1, 475-T15-1, 475-T20-1, 475-T25-1, 475-T30-1, 475-T40-1			⊗

1/4" BITS SETS

1/4" TORX® BITS SET



- Bits set of 9 pieces: 8 bits and 1 magnetic quick release bit holder
- 1/4" hexagon drive. DIN 3126, ISO 1173, style C 6.3
- Robust and tough bits
- Quick release bit holder with strong magnet (style E 6.3)
- Sand blasting finish bits
- The small size of the set is ideal to be carried in a pocket. Easy to open and close
- For universal use
- High performance alloy steel
- In blister packaging

IRIMO				
475-9-1	1	9	40x20x97	129
475A-60QR-1				
475-T10-1, 475-T15-1, 2x 475-T20-1, 2x 475-T25-1, 475-T30-1, 475-T40-1				

1/4" BITS SETS




- Drive: 1/4" DIN 3126-C 6.3, ISO 1173
- Finish: sand blasting
- Material: high performance alloy steel
- In blister packaging

IRIMO				
475-61-1	1	35x148x112	549	
475-4.5-1, 475-4-1, 475-5.5-1, 475-6.0-1, 475-6.5-1, 475-8.0-1				
475-PH0-1, 2x 475-PH1-1, 3x 475-PH2-1, 2x 475-PH3-1				
2x 475-PH2G-1				
475-PZ0-1, 2x 475-PZ1-1, 3x 475-PZ2-1, 2x 475-PZ3-1				
475-T6-1, 475-T7-1, 475-T8-1, 475-T9-1, 2x 475-T10-1, 2x 475-T15-1, 3x 475-T20-1, 2x 475-T25-1, 2x 475-T27-1, 2x 475-T30-1, 2x 475-T40-1				
475-TR10-1, 475-TR15-1, 475-TR20-1, 475-TR25-1, 475-TR27-1, 475-TR30-1, 475-TR40-1				
475-H3-1, 475-H4-1, 475-H5-1, 475-H6-1				
475A-25-1				
R-1, R-2, R-3				
475A-60QR-1				

PRECISION SCREWDRIVER SET FOR PRECISION ENGINEERING AND ELECTRONICS APPLICATIONS

RATCHETING BIT HOLDER PRECISION SCREWDRIVER WITH 17 PIECES BITS

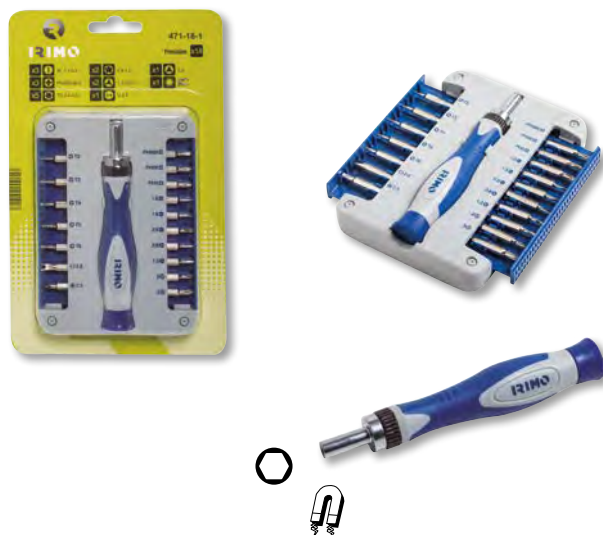

- Bits drive: 5/32" DIN 3126-C 4, ISO 1173
- Bits: made of chrome-vanadium steel, durable and high precision
- Handle: 2-component handle
- The rotating head allows an easy and accurate driving
- Magnetic blade secures bit in screwdriver
- Smooth ratcheting stroke: Three position ratchet mechanism: forward, reverse and neutral
- In blister packaging

IRIMO				
471-18-1	1	18	35x95x130	220
x3	①	SL: 1-1.5-2 mm	x3	PH000-PH00-PH0
x5	✱	T2-T3-T4-T5-T6	x2	0.8-1.2
x2	⚙	Y 2.0-3.0	x2	U 2.6
x1	⚙	2.3	x1	○

5/16" BITS

5/16" BITS FOR SLOTTED SCREWS



x2

- Drive: 5/16" DIN 3126-C 8, ISO 1173
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 2 pieces
- Retail package

470-5.5-1	1	1.0	5.5	36	18
470-6.5-1	1	1.2	6.5	36	20
470-8.0-1	1	1.2	8.0	36	22
470-10.0-1	1	1.6	10.0	36	30
470-12.0-1	1	2.0	12.0	36	36
470-14.0-1	1	2.5	14.0	36	38

5/16" BITS FOR PHILLIPS SCREWS



x2

- Drive: 5/16" DIN 3126-C 8, ISO 1173
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 2 pieces
- Retail package

470-PH1-1	1	PH-1	36	22
470-PH2-1	1	PH-2	36	24
470-PH3-1	1	PH-3	36	25
470-PH4-1	1	PH-4	36	28

5/16" BITS FOR HEXAGONAL SCREWS



x2

- Drive: 5/16" DIN 3126-C 8, ISO 1173
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 2 pieces
- Retail package

470-H4-1	1	4	36	25
470-H5-1	1	5	36	26
470-H6-1	1	6	36	27
470-H7-1	1	7	36	28
470-H8-1	1	8	36	29
470-H10-1	1	10	36	36

5/16" BITS FOR TORX® SCREWS



x2

- Drive: 5/16" DIN 3126-C 8, ISO 1173
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 2 pieces
- Retail package

			 L mm	 L mm	 g
470-T20-1	1	T20	3.86	36	21
470-T25-1	1	T25	4.43	36	22
470-T27-1	1	T27	4.99	36	24
470-T30-1	1	T30	5.52	36	24
470-T40-1	1	T40	6.65	36	27
470-T45-1	1	T45	7.82	36	27
470-T50-1	1	T50	8.83	36	27
470-T55-1	1	T55	11.22	36	28

5/16" IMPACT SCREWDRIVER

5/16" IMPACT SCREWDRIVER



- To turn frozen screws
- Converts hammer action on turning driving
- Hammer action guarantees that the bit will remain against the screw
- Square drive 1/2". Bit size 5/16"
- Reversible by positioning the adaptor

		L mm	C mm	A mm	L1 mm	g
470011	1	125	33	24	40	650

5/16" IMPACT SCREWDRIVER ADAPTOR



- Finish: Chrome-plated
- 1/2" square drive
- For 5/16" bits
- With retaining ring

		L mm	g
470051	1	40	54

5/16" IMPACT DRIVER BIT SET

x 20



- 1 Impact screwdriver, 1/2" square drive
- 1 Bit holding adaptor for screwdriver bits, 5/16" hexagon and 1/2" square drive
- 18 bits of 5/16"
- In black metal box

		mm	g
471011	1	197x70x45	1.280
470-8.0-1, 470-10.0-1, 470-12.0-1	①		
470-PH2-1, 470-PH3-1, 470-PH4-1	⊕		
470-H4-1, 470-H5-1, 470-H6-1, 470-H7-1, 470-H8-1, 470-H10-1	●		
470-T25-1, 470-T27-1, 470-T30-1, 470-T40-1, 470-T45-1, 470-T50-1	✱		
470011	○		

10 MM BITS


10 MM BITS FOR HEXAGONAL SCREWS



- Drive: 10 mm
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

T49H4	1	4	30	5
T49H5	1	5	30	6.5
T49H6	1	6	30	7
T49H7	1	7	30	7
T49H8	1	8	30	7
T49H10	1	10	30	7
T49H12	1	12	30	12
T49H14	1	14	30	14
T49H4L	1	4	75	20
T49H5L	1	5	75	20
T49H6L	1	6	75	20
T49H7L	1	7	75	20
T49H8L	1	8	75	20
T49H10L	1	10	75	20
T49H12L	1	12	75	20
T49H10XL	1	10	115	75

1/2" ADAPTOR FOR 10 MM BITS



- 1/2" Adaptor for 10 mm bits
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

T4901	1	10	36	17	22	55


10 MM BITS FOR TORX® SCREWS



- Drive: 10 mm
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

T49T20	1	T20	3.84	30	6.5
T49T25	1	T25	4.4	30	6.5
T49T27	1	T27	4.96	30	6.5
T49T30	1	T30	5.49	30	6.5
T49T40	1	T40	6.6	30	6.5
T49T45	1	T45	7.7	30	6.5
T49T50	1	T50	8.79	30	6.5
T49T55	1	T55	11.17	30	6.5
T49T60	1	T60	13.2	30	6.5
T49T20L	1	T20	3.84	75	20
T49T25L	1	T25	4.4	75	20
T49T27L	1	T27	4.96	75	20
T49T30L	1	T30	5.49	75	20
T49T40L	1	T40	6.6	75	20
T49T45L	1	T45	7.7	75	20
T49T50L	1	T50	8.79	75	20
T49T55L	1	T55	11.17	75	20
T49T60L	1	T60	13.2	75	20
T49T55XL	1	T55	11.17	115	75

3/8" ADAPTOR FOR 10 MM BITS



- 3/8" Adaptor for 10 mm bits
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

T4902	1	10	35	15	10	32

10 MM BITS

10 MM BITS FOR TORX® TAMPER SCREWS



- Drive: 10 mm
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

R				L mm	g
T49T20H	1	TR20	3.84	30	6.5
T49T25H	1	TR25	4.4	30	6.5
T49T27H	1	TR27	4.96	30	6.5
T49T30H	1	TR30	5.49	30	6.5
T49T40H	1	TR40	6.6	30	6.5
T49T45H	1	TR45	7.7	30	6.5
T49T50H	1	TR50	8.79	30	6.5
T49T55H	1	TR55	11.17	30	6.5
T49T60H	1	TR60	13.2	30	6.5
T49T20HL	1	TR20	3.84	75	20
T49T25HL	1	TR25	4.4	75	20
T49T27HL	1	TR27	4.96	75	20
T49T30HL	1	TR30	5.49	75	20
T49T40HL	1	TR40	6.6	75	20
T49T45HL	1	TR45	7.7	75	20
T49T50HL	1	TR50	8.79	75	20
T49T55HL	1	TR55	11.17	75	20
T49T60HL	1	TR60	13.2	75	20

10 MM BITS FOR XZN SCREWS



- Drive: 10 mm
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

R			L mm	g
T49M5	1	M5	30	6.5
T49M6	1	M6	30	7
T49M8	1	M8	30	7
T49M10	1	M10	30	8.5
T49M12	1	M12	30	10
T49M14	1	M14	30	20
T49M5L	1	M5	75	15
T49M6L	1	M6	75	15
T49M8L	1	M8	75	15
T49M10L	1	M10	75	15
T49M12L	1	M12	75	15

10 MM SQUARE BITS




- Drive: 10 mm
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

R			L mm	g
T49SQ8	1	8	30	17
T49SQ10	1	10	30	22

1/2" SOCKET DRIVERS

1/2" SOCKET DRIVERS FOR TORX® TAMPER SCREWS



- 1/2" socket drivers for TORX® tamper screws
- Finish: zinc phosphated
- Material: high performance alloy steel
- In plastic bag of 1 piece

R			L mm	L1 mm	g
T49T30XL	1	TR30	1/2"	200	122
T49T40XL	1	TR40	1/2"	200	123
T49T45XL	1	TR45	1/2"	200	125
T49T70HL	1	TR70	1/2"	100	167
T49T80HL	1	TR80	1/2"	100	163



08.

STRIKING TOOLS

PUNCHES AND CHISELS


COLD CHISELS



- Chrome vanadium
- Standard: UNE 16567

		L mm	S mm	A mm	g
501-150-1	25	150	18	10	133
501-200-1	25	200	22	12	243
501-250-1	20	250	25	13	357
501-300-1	25	300	26	14	552


FLAT COLD CHISELS

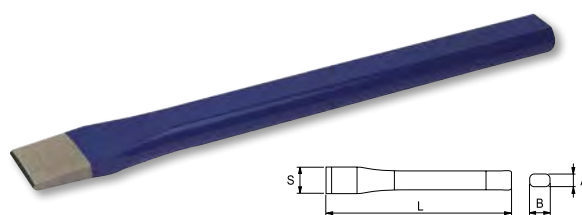

- Chrome molib. vanadium
- Finish: Lacquered, blue painted
- Flat oval shank
- Standard: DIN 7250

		L mm	S mm	AxB mm	g
504-150-1	10	150	21	11x17	181
504-175-1	10	175	24	12x20	269
504-200-1	10	200	28	13x23	390
504-250-1	10	250	28	13x23	500
504-300-1	10	300	32	13x26	602


FLAT COLD CHISEL

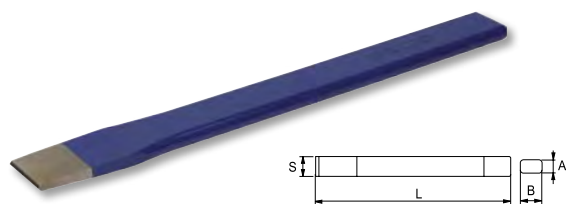

- Chrome molib. vanadium
- Finish: Lacquered, blue painted
- Flat oval shank

		L mm	S mm	A mm	B mm	g
502-230-1	10	230	26	7	26	285


EXTRAFLAT COLD CHISEL

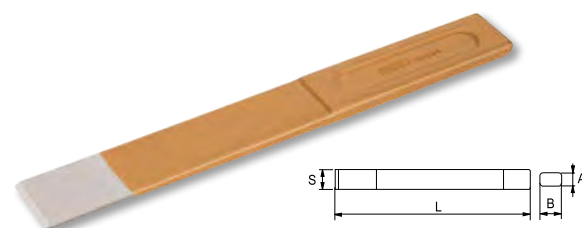

- Extraflat cold chisel
- Chrome molib. vanadium
- Flat oval shank

		L mm	S mm	A mm	B mm	g
500-240-1	10	230	26	4	26	278


FLAT CAPE CHISELS

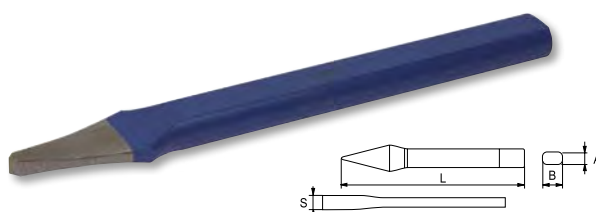

- Chrome molib. vanadium
- Finish: Lacquered, blue painted
- Flat oval shank
- Standard: DIN 7250

		L mm	S mm	AxB mm	g
506-150-1	10	150	6	11x17	152
506-175-1	10	175	7	12x20	231
506-200-1	10	200	8	13x23	335

ROUND CENTRE PUNCHES

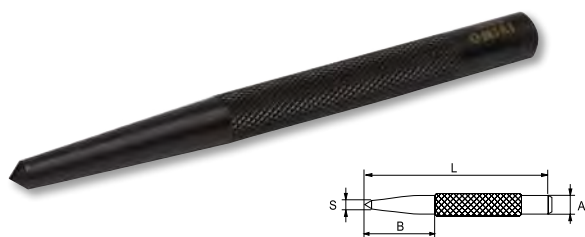

- Black finish
- Standard: UNE 16574


IRIMO		S mm	L mm	A mm	B mm	g
511-100-1	25	2.5	100	8	35	31
511-105-1	25	4	105	8	35	34
511-110-1	25	5	110	8	40	37
511-115-1	25	6	115	10	45	60
511-130-1	20	8	130	12	50	98

ROUND CENTRE PUNCH SETS



IRIMO				g
511-91-4	1	4	2.5 - 4 - 6 - 8 mm	234
511-92-4	1	5	2.5 - 4 - 5 - 6 - 8 mm	275


ROUND TAPER PUNCHES

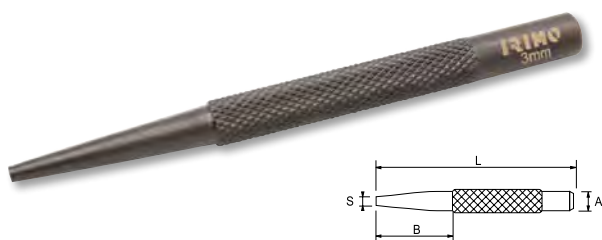

- Black finish
- Standard: UNE 16576

IRIMO		S mm	L mm	A mm	B mm	g
513-002-1	25	2	100	8	35	31
513-003-1	25	3	100	8	35	32
513-004-1	25	4	115	10	45	55
513-005-1	25	5	115	10	45	59
513-006-1	20	6	130	12	50	94
513-008-1	20	8	150	12	55	117
513-010-1	20	10	170	14	60	183

OCTAGONAL TAPER PUNCHES

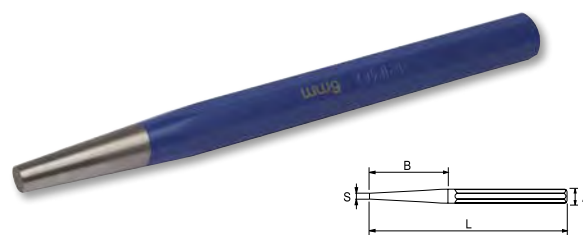

- Chrome molib. vanadium
- Finish: Lacquered, blue painted
- Octagonal shank
- Standard: DIN 6458

IRIMO		S mm	L mm	A mm	B mm	g
514-002-1	25	2	120	10	40	60
514-003-1	25	3	120	10	40	60
514-004-1	25	4	120	10	40	62
514-005-1	25	5	120	10	40	64
514-006-1	25	6	120	12	40	93

PUNCHES AND CHISELS

ROUND TAPER PUNCH SET



513-91-4	1	5	2 - 4 - 6 - 8 - 10 mm	502

OCTAGONAL TAPER PUNCH SET




519-91-4	1	6	150 x 80 x 12	409


2-3-4-5-6 mm



4 mm



ROUND PARALLEL PIN PUNCHES



- Black finish
- Standard: UNE 16575

		 S	 L	 A	 B	
515-002-1	25	2	100	8	28	29
515-003-1	25	3	100	8	28	30
515-004-1	25	4	100	8	28	31
515-005-1	25	5	115	10	33	53
515-006-1	25	6	115	10	33	55
515-007-1	25	7	115	10	33	58
515-008-1	20	8	130	12	43	91
515-009-1	20	9	130	12	43	96
515-010-1	20	10	130	14	53	143

ROUND PARALLEL PIN PUNCH SET



515-91-4	1	9	2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 mm	622


OCTAGONAL PARALLEL PIN PUNCHES



- Chrome molib. vanadium
- Finish: Lacquered, blue painted
- Octagonal shank
- Standard: DIN 6450

Q		S mm	L mm	A mm	B mm	g
516-002-1	20	2	150	10	35	63
516-003-1	20	3	150	10	40	63
516-004-1	20	4	150	10	50	63
516-005-1	20	5	150	10	50	64
516-006-1	20	6	150	10	50	70
516-008-1	20	8	150	12	55	106


OCTAGONAL PARALLEL PIN PUNCHES, LONG SERIES

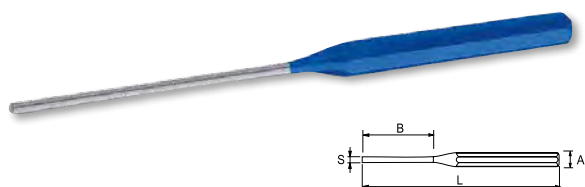


- Finish: Lacquered, blue painted
- Octagonal shank
- Long length

Q		S mm	L mm	A mm	B mm	g
518-004-1	20	4	175	10	80	61
518-006-1	20	6	175	10	80	72

ELECTRICIAN'S COLD CHISELS

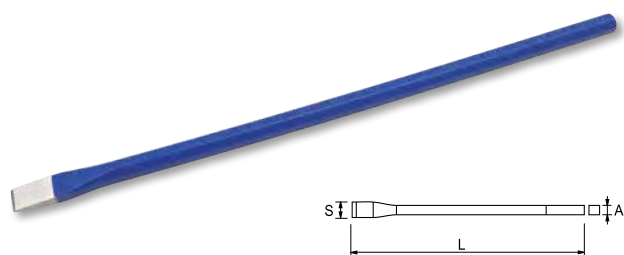

ROUND PARALLEL PIN PUNCHES, LONG SERIES

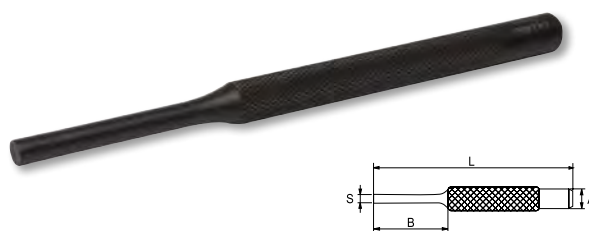

- Black finish
- Standard: UNE 16575

Q		S mm	L mm	A mm	B mm	g
517-120-1	25	2	120	8	30	33
517-130-1	25	3	130	8	40	35
517-135-1	25	4	135	8	45	37
517-140-1	25	5	140	10	50	60
517-145-1	20	6	145	10	55	64
517-150-1	20	8	150	12	60	100

ROUND PARALLEL PIN PUNCH SET, LONG SERIES




Q		S mm	L mm	A mm	B mm	g
517-91-4	1	6	2 - 3 - 4 - 5 - 6 - 8 mm			355

- Finish: Lacquered, blue painted
- Chrome molib. vanadium


Q		L mm	S mm	A mm	g
503-200-1	20	200	12	8	93
503-250-1	20	250	12	8	119
503-300-1	20	300	12	8	142

WRECKING BARS

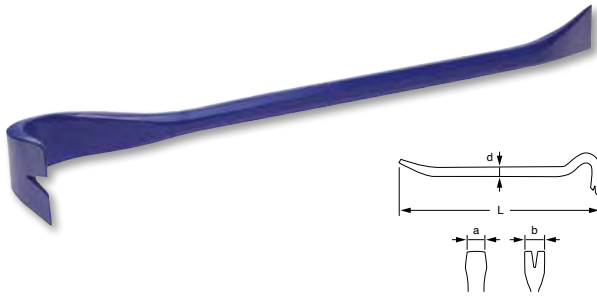

- Heavy duty tool for striking tasks
- Designed for a good penetration in very narrow places and nails provided
- With special designed claw areas to facilitate nail extraction
- Smooth finishing and high quality paint to get a comfortable use

		L mm	a mm	b mm	d mm	g
WB-300-2	1	346	28	44	14	450
WB-625-2	1	685	37	62	17	1.450
WB-710-2	1	704	41	69	17	1.950

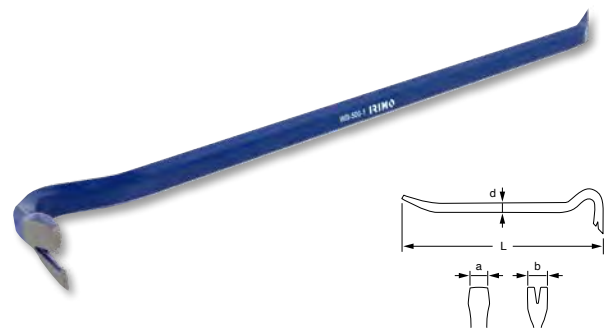

- Heavy duty tool for striking tasks
- Designed for a good penetration in very narrow places and nails provided

		L mm	a mm	b mm	d mm	g
WB-500-1	1	500	29	29	15,5	900
WB-600-1	1	600	31,5	36	18	1.370
WB-800-1	1	800	31,5	36	18	1.990
WB-1000-1	1	1000	34	40	20	2.690
WB-1200-1	1	1200	34	40	20	3.200

ENGINEERS SCRIBERS




- Suitable for marking on hard surfaces
- 150 mm long

		L mm	g
511501	1	150	39



HAMMERS


CURVED CLAW HAMMER WITH WOODEN HICKORY HANDLE

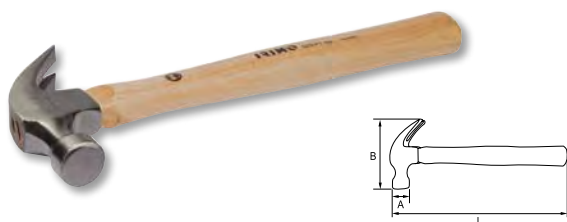

- Handle fitting to hammer head with wedges

Q	Box	oz	g	A mm	B mm	L mm	g
520-41-2	6	16	450	29	130	330	710
520-61-2	6	20	560	30	140	333	820

CURVED CLAW HAMMER WITH FIBREGLASS HANDLE

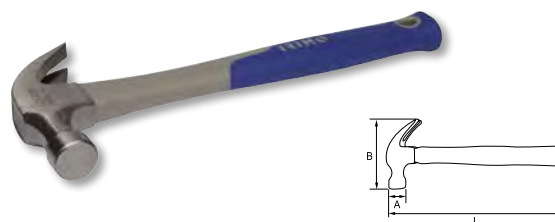

- Handle specially glued to hammer head
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip

Q	Box	oz	g	A mm	B mm	L mm	g
520-43-2	6	16	450	29	130	330	710
520-63-2	6	20	560	30	140	333	820

SPARE WOODEN HICKORY HANDLE FOR CURVED CLAW HAMMERS



- Served with corresponding wedges

Q	Box	g
520-42-2	12	520-41-2 / 520-61-2
		160


STUBBY CLAW HAMMER



- Handle specially glued to hammer head
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip
- Magnet on the head for holding the nail

Q	Box	oz	g	A mm	B mm	L mm	g
520-13S-1	6	8	227	23	105	160	300

CLAW HAMMER SPANISH TYPE WITH FIBREGLASS HANDLE

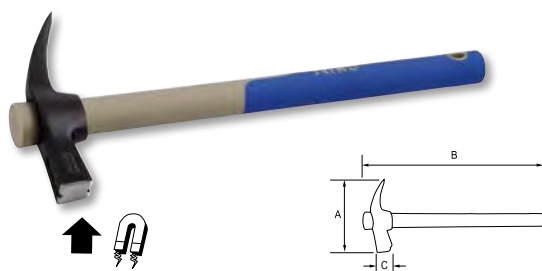

- Magnet on the head for holding the nail
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip

Q	Box	g	A mm	B mm	C mm	g
428-700-2	6	700	175	450	28	1000

HAMMERS

JOINER'S HAMMER WITH WOODEN HICKORY HANDLE



- Handle fitted with wedges to hammer head

			A mm	B mm	L mm	
522-21-2	12	170	20	91	282	270
522-31-2	6	270	25	107	291	380
522-41-2	6	460	30	120	311	680

GERMAN DIN HAMMER WITH WOODEN HICKORY HANDLE



- Handle wedged to hammer head

						
525-11-2	6	100	17	90	270	250
525-21-2	6	200	19	95	280	280
525-31-2	6	300	23	105	300	420
525-41-2	6	500	27	118	320	650
525-61-2	6	800	33	130	350	990
525-71-2	4	1.000	36	135	360	1.220
525-81-2	4	1.500	42	145	380	1.790
525-91-2	4	2.000	45	150	380	2.300

SPARE WOODEN HICKORY HANDLE FOR JOINER'S HAMMERS



- Served with corresponding wedges

R	g	g	g
522-22-2	18	522-21-2	63
522-32-2	18	522-31-2	100
522-42-2	18	522-41-2	140

SPARE WOODEN HICKORY HANDLE FOR GERMAN DIN HAMMERS



- Served with corresponding wedges

R	g	g	g
525-12-2	12	525-11-2	96
525-22-2	12	525-21-2	86
525-32-2	12	525-31-2	93
525-42-2	12	525-41-2	136
525-62-2	12	525-61-2	212
525-72-2	12	525-71-2	260
525-82-2	12	525-81-2	298
525-92-2	12	525-91-2	344

JOINER'S HAMMER WITH FIBREGLASS HANDLE



- Handle specially glued to hammer head
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip

						
522-23-2	12	170	20	91	282	270
522-33-2	6	270	25	107	291	380
522-43-2	6	460	30	120	311	680

GERMAN DIN HAMMER WITH FIBREGLASS HANDLE



- Handle specially glued to hammer head
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip

			A mm	B mm	L mm	
525-43-2	6	500	27	118	330	735

RIVOIR HAMMER WITH WOODEN HICKORY HANDLE



- Handle wedged to hammer head

			A mm	B mm	L mm	g
526-31-2	4	250	25	81.5	265	350
526-41-2	4	400	30	92	280	520
526-51-2	4	630	35	103	300	800
526-61-2	4	800	40	110	330	1.000
526-71-2	4	1.150	45	124	350	1.400
526-91-2	4	2.000	50	138	380	2.250

SPARE WOODEN HICKORY HANDLE FOR RIVOIR HAMMERS



- Served with corresponding wedges

			g
526-32-2	12	526-31-2	93
526-42-2	12	526-41-2	136
526-52-2	12	526-51-2	212
526-62-2	12	526-61-2	260
526-72-2	12	526-71-2	298
526-92-2	12	526-91-2	344

RIVOIR HAMMER WITH FIBREGLASS HANDLE



- Handle specially glued to hammer head
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip

			A mm	B mm	L mm	g
526-53-2	6	630	35	103	330	630

BALL PEIN HAMMER WITH WOODEN HICKORY HANDLE



- Handle wedged to hammer head

					A mm	B mm	L mm	
527-31-2	6	B	12	340	27	87	318	440
527-41-2	6	C	16	455	30	97	318	560
527-51-2	6	D	20	560	33	106	318	720
527-61-2	6	E	24	680	35	116	343	920
527-71-2	6	F	32	910	37	127	343	1.148
527-81-2	6	G	40	1.135	38	134	378	1.400
527-91-2	6	H	48	1.360	40	144	385	1.640

SPARE WOODEN HICKORY HANDLE FOR BALL PEIN HAMMERS



- Served with corresponding wedges

			g
527-32-2	18	527-31-2 (B) / 527-41-2 (C) / 527-51-2 (D)	100
527-52-2	12	527-61-2 (E) / 527-71-2 (F)	160
527-82-2	12	527-81-2 (G) / 527-91-2 (H)	220

BALL PEIN HAMMER WITH FIBREGLASS HANDLE




- Handle specially glued to hammer head
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip

								
527-33-2	6	B	12	340	27	90	317	500
527-43-2	6	C	16	455	30	100	320	600
527-53-2	6	D	20	560	33	108	324	760
527-63-2	6	E	24	680	35	120	335	920
527-73-2	6	F	32	910	37	131	337	1.148
527-83-2	6	G	40	1.135	38	139	387	1.400
527-93-2	6	H	48	1.360	40	148	390	1.640

HAMMERS


SPANISH TYPE SHOVEL-PICKS WITH FIBREGLASS HANDLE



- Ideal for bricklayer works in horizontal and vertical direction
- Trimaterial handle with fiberglass core and covered with polypropylene and elastomere for an effective grip
- Hardened striking areas according to standards

®			A mm	B mm	C mm	g
495F-500-2	6	500	265	330	39	740
495F-600-2	1	600	265	330	45	840


STONING HAMMER WITH WOODEN HICKORY HANDLE



- Handle wedged to the club hammer head

®			A mm	B mm	L mm	g
530-03-2	6	700	35	110	280	800
530-05-2	6	1.000	38	120	280	1.200
530-07-2	6	1.250	43	135	280	1.400

STONING HAMMER WITH WOODEN HICKORY HANDLE



- Handle wedged to club hammer head

®			A mm	B mm	L mm	g
531-05-2	6	1.000	40	95	260	1.155
531-07-2	6	1.250	43	100	260	1.405
531-08-2	4	1.500	45	110	280	1.675
531-09-2	2	2.000	50	120	300	2.235

SPARE WOODEN HICKORY HANDLE FOR STONING HAMMERS



- Served with corresponding wedges

®			g
530-13-2	12	530-03-2	145
530-15-2	12	530-05-2 / 530-07-2	159


SPARE WOODEN HICKORY HANDLE FOR STONING HAMMERS



- Served with corresponding wedges

®			g
531-15-2	12	531-05-2	165
531-17-2	12	531-07-2	168
531-18-2	12	531-08-2	205
531-19-2	12	531-09-2	231

BLACK RUBBER MALLET



- Handle wedged to club hammer head

®		A mm	B mm	L mm	g
529251	1	55	90	320	250
529261	1	65	115	340	440
529271	1	75	125	360	600
529291	1	90	139	360	720

ANTI-BOUNCE NYLON FACED HAMMERS



- Wooden handle

Q		S mm	A mm	L mm	g
529611	6	35	115	370	500
529621	6	50	120	390	1.000
529631	6	60	125	420	1.560

SPARE TIPS FOR ANTI-BOUNCE NYLON FACED HAMMERS



- Anti-bounce nylon tips

Q		A mm	L mm	g
529701	6	25	35	20
529711	6	28	50	50
529721	6	30	60	60

WOODEN HANDLES FOR ANTI-BOUNCE NYLON FACED HAMMERS



- Anti-bounce hammer handle

Q			g
529801	1	529611	90
529811	1	529621	140
529821	1	529631	215

NYLON FACED HAMMERS



- Metal handle, rubber grip

Q		S mm	A mm	L mm	g
529021	6	28	80	255	325
529031	6	35	100	285	650
529041	6	44	125	300	1.105

NYLON FACED HAMMERS



- Wooden handle

Q		S mm	A mm	L mm	g
529151	6	22	65	215	145
529161	6	28	80	270	260
529171	6	35	100	295	500
529181	6	44	125	345	1.010
529191	6	55	140	380	1.480

SPARE TIPS FOR NYLON FACED HAMMERS



- Spare tips for nylon faced hammers

Q		A mm	L mm	Ø mm	g
529061	10	12	22	8	10
529071	10	19	28	9	15
529081	10	22	35	10	20
529091	10	27	44	13	50
529101	10	32	55	16	80

WOODEN HANDLES FOR NYLON FACED HAMMERS



- Spare handle for nylon faced hammers

Q			g
529751	1	529151	50
529761	1	529161	70
529771	1	529171	100
529781	1	529181	150
529791	1	529191	170

CHISELS

CHISEL SET, 3 pieces



- General purpose bevel edge wood chisels
- Mono-material polypropylene handle
- High quality Cr-V 58-62 HRC steel blades hardened for long-lasting performance
- Ground blades
- Fitted with a tip protector

805-3-C	1	3	12, 18, 25 mm	589


WOOD CARVING SET, 6 pieces



- Carving chisel set, 6 pieces
- Rubberwood handle
- High quality chrome vanadium steel blades
- Hardness at least up to 55 HRC for durability and easy maintenance
- Black oxide finish and anti-rust oil for protection of rust
- Length of chisels: 160 mm

806-6-B	1	6	160	221

	1 piece square chisel, 12 mm
	1 piece skene chisel, 12 mm
	1 piece curved gouge, 6.5 mm
	1 piece straight gouge, 5 mm
	1 piece curved flat, 5 mm
	1 piece curved U tool, 12 mm

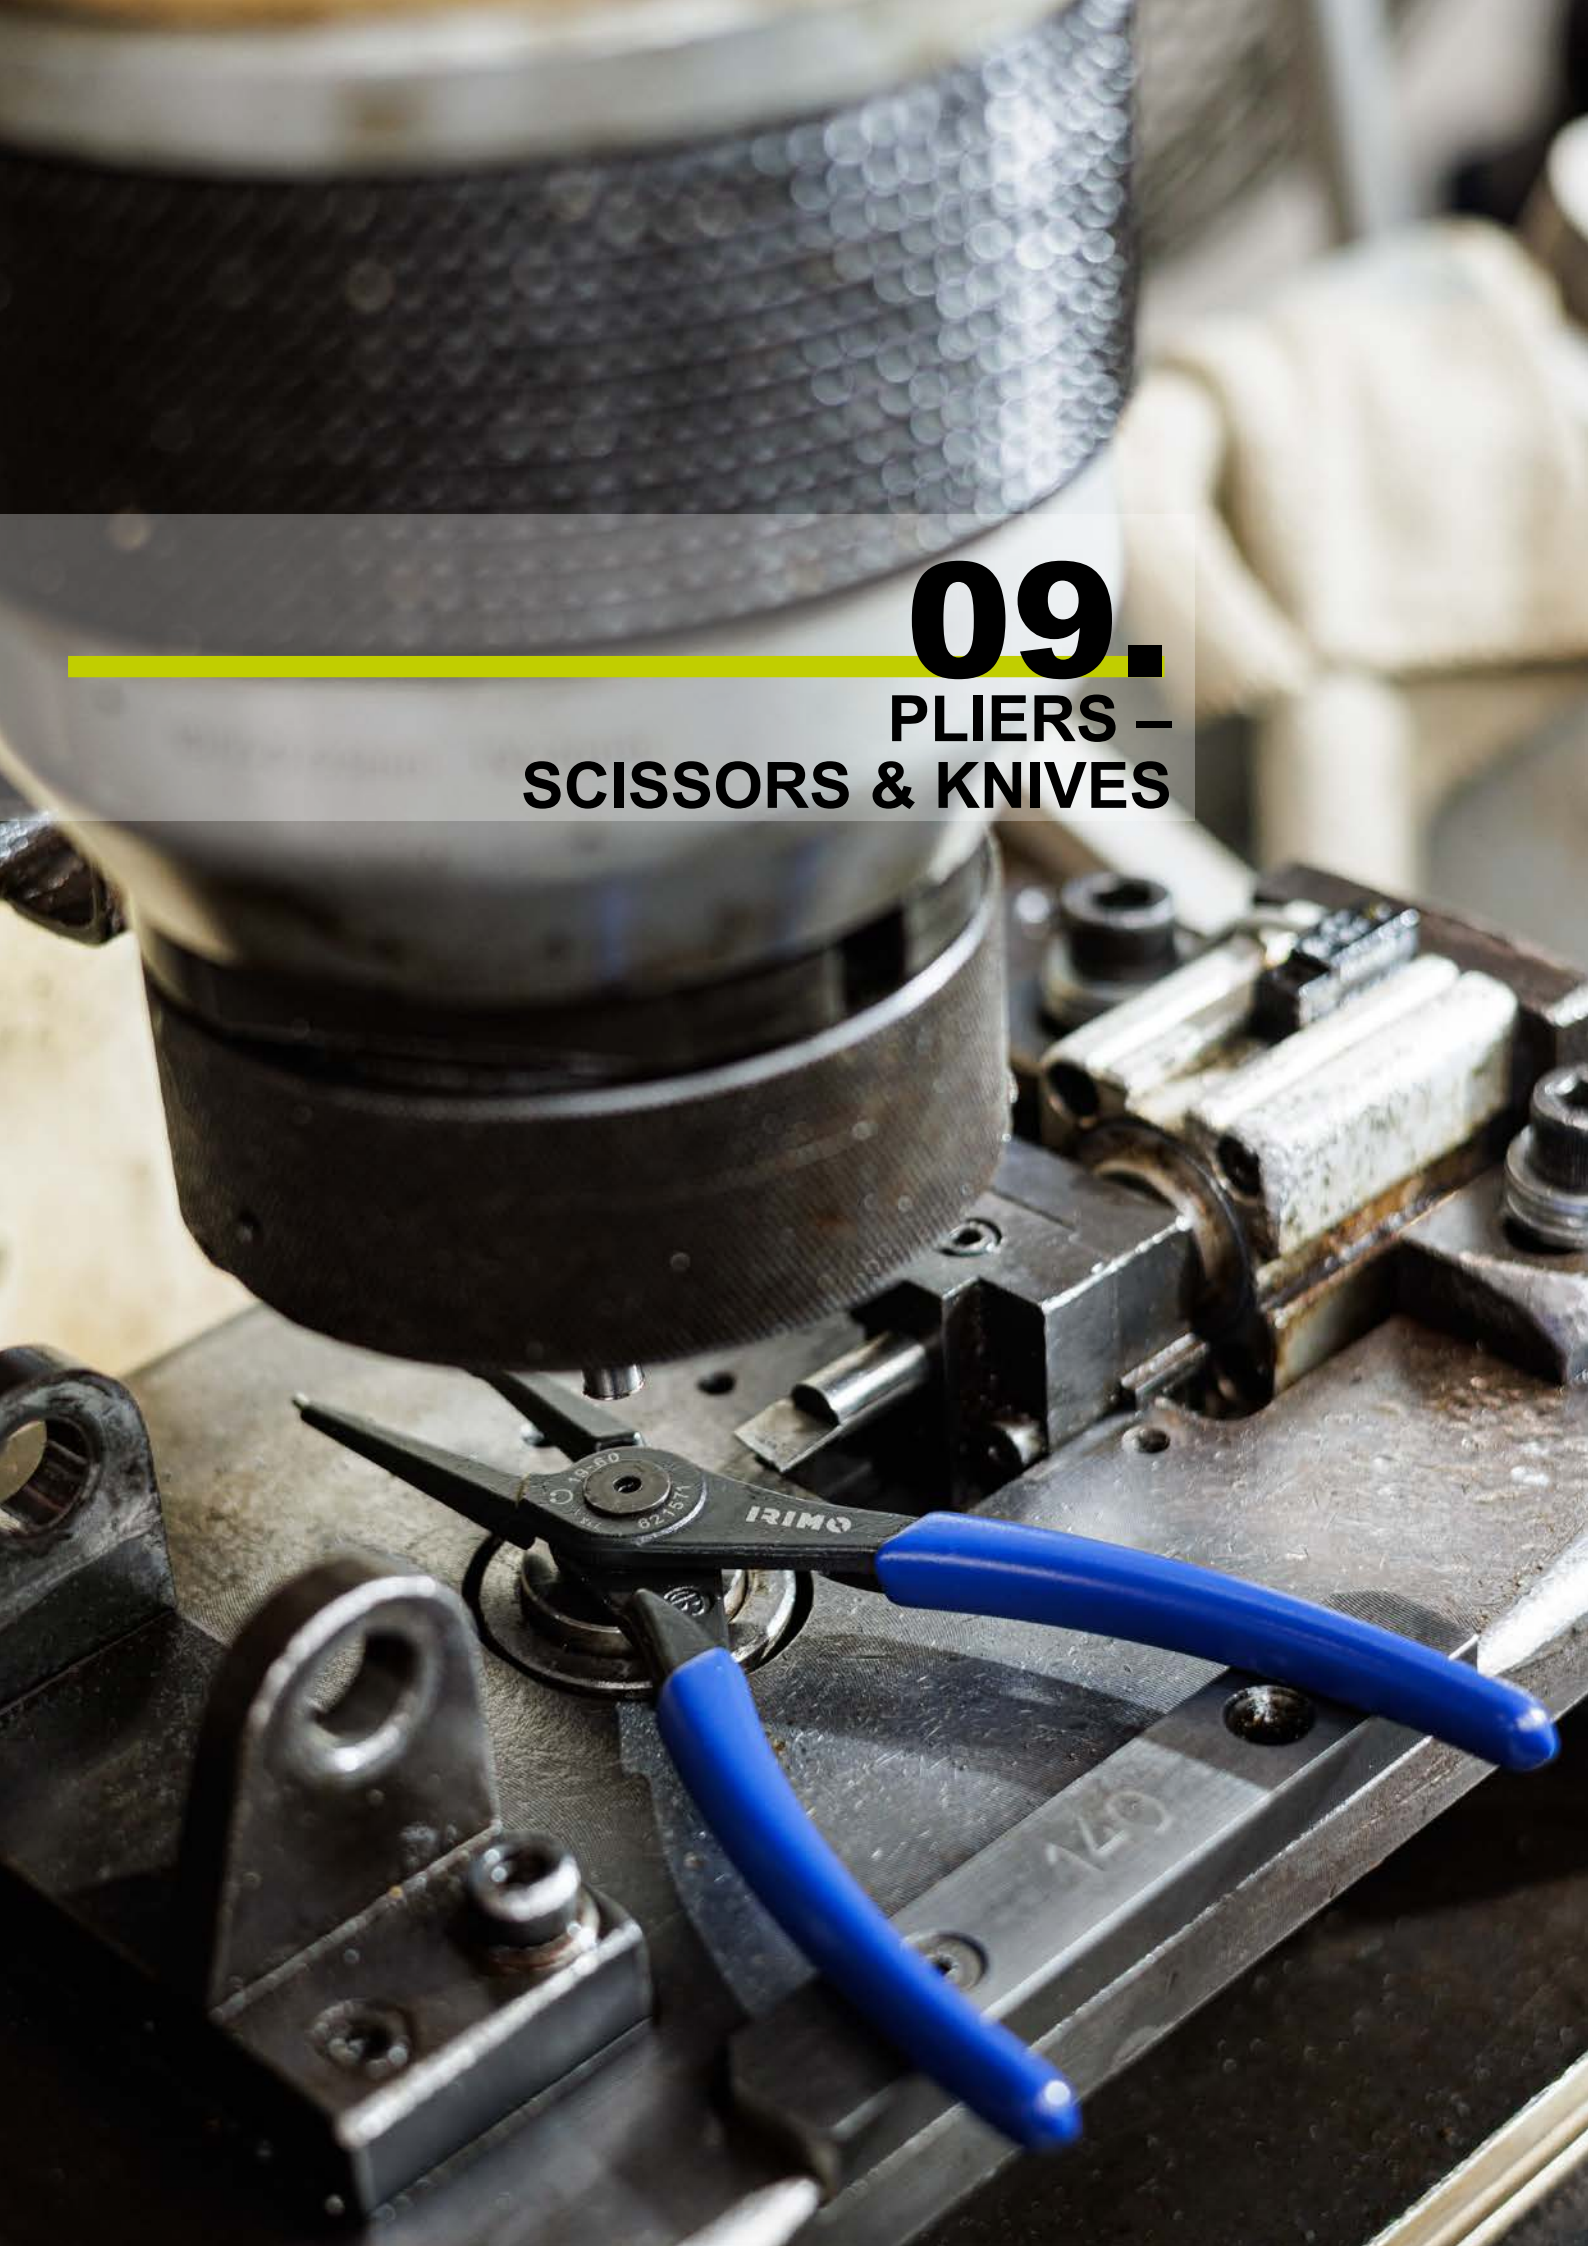

09.

PLIERS – SCISSORS & KNIVES

PLIERS

Made to last

Universal

for holding and cutting objects with steadiness.

Versatile

with cutting capacity in semi-hard wires from
Ø1,60-2,00-2,50 mm &
Copper wires Ø1 mm.


Antislippery handle

with rubber and hard plastic provides a perfect
combination for grip in your hand.

Hardened


cutting edges for more exigent tasks.

COMBINATION PLIERS



		L mm	L1 mm	W1 mm	W2 mm	T1 mm	 1 mm	 2 mm	
601-160-1	5	160	35	24	50	10	Ø1.0	Ø1.6	190
601-180-1	5	180	38	27	50	10	Ø1.0	Ø2.0	240
601-200-1	5	197	41.5	29.5	50	10	Ø1.0	Ø2.5	300


SIDE CUTTING PLIERS



- High performance steel
- Hardness: edges hardened to 60-65 HRc
- Standard: ISO 5749
- Cutting capacity:
 - 1- Bronze wire: 0.50 mm
 - 2- Medium hard wire: 1.60 mm

		L	L1	L2	L3	W1	W2	T1	1 mm	2 mm	g
624-140-1	5	142	20.5	6	12	18.6	50	10	Ø0.5	Ø1.6	170
624-160-1	5	160	21.5	7	13	21.6	50	11.5	Ø0.5	Ø1.6	200
624-180-1	5	176	24.5	7	14	25.6	50	12.5	Ø0.5	Ø1.6	250


SIDE CUTTING PLIERS



- High performance steel
- Hardness: edges at 60-65 HRc
- Standard: ISO 5749
- Cutting capacity:
 - 1- Bronze wire: 0.50 mm
 - 2- Medium hard wire: 1.80-2.00 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
625-180-1	5	180	20.5	25.6	49	11.5	Ø0.5	Ø1.8	280
625-200-1	5	206	23	30	54	12	Ø0.5	Ø2.0	320


SNIPE NOSE PLIERS



- High performance steel
- Hardness: edges at 58-65 HRc
- Standard: ISO 5745
- Cutting capacity:
 - 1- Bronze wire: 1.00 mm
 - 2- Medium hard wire: 1.60 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
612-160-1	5	161	61.5	16.5	49	10	Ø1.0	Ø1.6	140
612-200-1	5	201	78	18	50	10.5	Ø1.0	Ø1.6	180


SNIPE NOSE PLIERS BENT TIP



- High performance steel
- Hardness: edges at 58-65 HRc
- Angled at 45°
- Standard: ISO 5745
- Cutting capacity:
 - 1- Bronze wire: 1.00 mm
 - 2- Medium hard wire: 1.60 mm

		L	L1	W1	W2	T1	α	1 mm	2 mm	g
613-160-1	5	158	48	18	50	9.0	45°	Ø1.0	Ø1.6	132
613-200-1	5	197	74	18	50	10.5	45°	Ø1.0	Ø1.6	180

FLAT NOSE PLIERS



- High performance steel
- Hardness: 45-50 HRc
- Standard: ISO 5745

		L	L1	W1	W2	T1	g
604-160-1	5	158	48	17	48	9	150
604-180-1	5	180	50	20	50	11	175

PLIERS

ROUND NOSE PLIERS



- High performance steel
- Hardness: 45-50 HRc
- Standard: ISO 5745

Q		L mm	L1 mm	W1 mm	W2 mm	T1 mm	g
608-160-1	5	158	38	17	48	8.5	150


SLIP JOINT PLIERS



- High performance steel
- Hardness: teeth hardened to 50-57 HRc
- Standard: ISO 8976

Q		L mm	W1 mm	W2 mm	W3 mm	T1 mm	T2 mm	g
634-200-1	5	175	5.8	35.8	41	7	12	170
634-250-1	5	240	5	47.5	50	7.5	12.5	320
634-300-1	5	302	3	52.5	59.6	8	14.5	430

QUICK ADJUST SLIP JOINT PLIERS

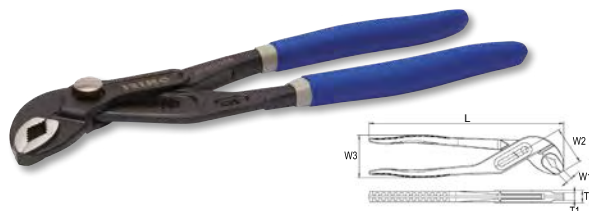


- With button for a quick adjustment
- High performance steel
- Hardness: teeth hardened to 50-57 HRc
- Standard: ISO 8976

Q		L mm	W1 mm	W2 mm	W3 mm	T1 mm	T2 mm	g
634Q-250-1	5	240	5	47.5	50	7.5	12.5	320

PLIERS SETS

PLIERS SETS

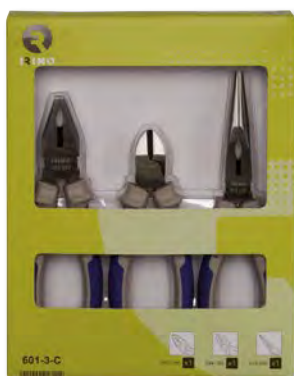

- High performance steel
- Bi-material handles

Q		X		g
601-3-C	1	3	270x205x40	690
601-180-1				
624-160-1				
612-200-1				

PLIERS SETS




- High performance steel
- Bi-material handles

Q		X		g
602-3-C	1	3	270x205x40	850
601-180-1				
624-160-1				
634-250-1				

MINI PLIERS


MINI COMBINATION PLIERS



- Mini combination pliers for fine assembly work in electronics and fine mechanics
- With gripping zones for flat and round material, suitable for versatile use
- With cutting edge for soft wire
- Cutting edge hardness: 58-65 HRC
- Soft grip bimaterial handles provide comfort and control
- Equipped with a return spring
- High performance alloy steel
- Standard: ISO 9655
- Cutting capacity:
 - 1- Min. cutting capacity Cu: 0.5 mm
 - 2- Max. cutting capacity medium hard wire: 0.8 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
601M-125-1	5	120	22	15	85	7	0.5	0.8	60


MINI FLAT NOSE PLIERS



- Mini flat nose pliers for fine assembly work in electronics and fine mechanics
- Smooth jaws for gripping, holding and bending delicate components
- Hardness: 42-50 HRC
- Soft grip bimaterial handles provide comfort and control
- Equipped with a return spring
- High performance alloy steel
- Standard: ISO 9655

		L	L1	W1	W2	T1	g
604M-125-1	5	130	27	12	85	8	89


MINI SNIPE NOSE PLIERS



- Mini snipe nose pliers for fine assembly work in electronics and fine mechanics
- With serrated jaws for a better grip
- With cutting edge for soft wire
- Cutting edge hardness: 58-65 HRC
- Soft grip bimaterial handles provide comfort and control
- Equipped with a return spring
- High performance alloy steel
- Standard: ISO 9655
- Cutting capacity:
 - 1- Min. cutting capacity Cu: 0.5 mm
 - 2- Max. cutting capacity medium hard wire: 0.8 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
612M-125-1	5	130	27	12	85	8	0.5	0.8	86

MINI SIDE CUTTING PLIERS




- Mini side cutting pliers for fine cutting work in electronics and fine mechanics
- With induction hardened cutting edge for soft and hard wire
- Oval head design
- Cutting edge hardness: 58-65 HRC
- Soft grip bimaterial handles provide comfort and control
- Equipped with a return spring
- High performance alloy steel
- Standard: ISO 9654
- Cutting capacity:
 - 1- Min. cutting capacity Cu: 0.5 mm
 - 2- Max. cutting capacity medium hard wire: 0.8 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
624M-125-1	5	120	16	12	85	8	0.5	0.8	81



MINI PLIERS

MINI END CUTTING PLIERS




- Mini end cutting pliers for fine cutting work in electronics and fine mechanics
- With induction hardened cutting edge for soft and hard wire
- Cutting edge hardness: 58-65 HRc
- Soft grip bimaterial handles provide comfort and control
- Equipped with a return spring
- High performance alloy steel
- Standard: ISO 9654
- Cutting capacity:
 - 1- Min. cutting capacity Cu: 0.5 mm
 - 2- Max. cutting capacity medium hard wire: 0.8 mm

		A	B	C	D	E	F	G	1 mm	2 mm	g
	mm	mm	mm	mm	mm	mm	mm	mm			
626M-125-1	5	110	8	16	10	3	3	9	0.5	0.8	81

PLIERS FOR ELECTRICIANS


STRIPPING PLIERS



- High performance steel
- Hardness: 45-50 HRc

		L	L1	W1	W2	T1	mm	g
	mm	mm	mm	mm	mm	mm		
629-160-1	5	160	40.5	19	48	9	1-6	170


COPPER ALUMINIUM WIRE CUTTER



- Wire cutting and stripping pliers for copper and aluminium
- Finish: Forged surfaces are black finished and mirror polished
- Material: Carbon steel, PVC coated handles

		L	L1	W1	T1	mm	mm	mm	mm	mm	g
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
655D-160-1	5	160	25	25	10	50/35	10	160			
655D-200-1	5	200	28	30	12	70/50	13	280			


CRIMPING PLIER INSULATED TERMINALS



- Pliers made of thick metal steel sheet and working areas are hardened
- Lightweight, occupy small volume and are easy to carry in the toolbox
- Suitable for crimping, cutting and stripping operations
- Crimping terminals: 1.5/2.5/6 mm²
- Cutting: M2.6-M5.0
- Stripping: 0.75-6.0 mm²

Q	L	A	C	mm ²	AWG	mm ²	AWG	mm ²	g
630-B1-1	12	220	38	3	1.5-6.0	20-10	0.75-6.0	20-10	0.75-6.00 220


CRIMPING PLIER NON-INSULATED TERMINALS



- Pliers made of thick metal steel sheet and working areas are hardened
- Lightweight, occupy small volume and are easy to carry in the toolbox
- Suitable for crimping, cutting and stripping operations
- Crimping terminals: 1.5/2.5/6 mm²
- Cutting: M2.6-M5.0
- Stripping: 0.75-6.0 mm²

Q	L	A	C	mm ²	AWG	mm ²	AWG	mm ²	g
630-B2-1	12	220	38	3	1.5-6.0	14-10	0.75-6.0	18-12	0.75-6.00 220

CRIMPING PLIER NON-INSULATED FASTON TYPE TERMINALS



- Pliers made of thick metal steel sheet and working areas are hardened
- Lightweight, occupy small volume and are easy to carry in the toolbox
- Suitable for crimping, cutting and stripping operations
- Crimping terminals: 1.5/2.5/6 mm²
- Cutting: M2.6-M5.0
- Stripping: 0.75-6.0 mm²

Q	L	A	C	mm ²	AWG	mm ²	AWG	mm ²	g
630-B3-1	12	220	38	3	1.5-6.0	14-10	0.75-6.0	18-12	0.75-6.00 220

CRIMPING PLIER INSULATED TERMINALS SET



- Pliers made of thick metal steel sheet and working areas are hardened
- Lightweight, occupy small volume and are easy to carry in the toolbox
- Suitable for crimping, cutting and stripping operations
- 60 insulated terminals and crimping pliers are included in the set
- Crimping terminals: 1.5/2.5/6 mm²
- Cutting: M2.6-M5.0
- Stripping: 0.75-6.0 mm²

Q	L	A	C	mm ²	AWG	mm ²	AWG	mm ²	g
630-61B1-4	1	60 + 1	24x160x270	370					

PLIERS FOR ELECTRICIANS

INSULATED END SLEEVES AND PLUG CONNECTORS SET, 295 pieces



- Plastic box with compartments
- Contents:
 - 45 pcs insulated end sleeves with different diameters
 - 250 pcs insulated plug connectors with different shapes and diameters

630-295T-4	1	295	30 x 115 x 220	250

CRIMPING PLIER SET WITH INTERCHANGEABLE JAWS



* Compatible for solar panel connectors MC4


- Blow molded case
- Strong ratcheting plier with bimaterial handles for a perfect grip
- Contents:
 - Jaw for non-insulated open barrel terminals 0.5-6 mm² / AWG 22-10
 - Jaw for insulated terminals 0.5-6 mm² / AWG 22-10
 - Jaw for non-insulated twin cord end terminals 6-16 mm² / AWG 10-6
 - Jaw for cord end terminals 4-35 mm² / AWG 10-35
 - Jaw for non-insulated terminals 0.5-10 mm² / AWG 22-8

630-5HD-4	1	5	60 x 250 x 290	450

INSULATED PLIERS

INSULATED COMBINATION PLIERS

IEC 60900




- For work on live equipment, up to 1000V
- High performance steel
- Hardness: edges at 58-65 HRC
- Standard: ISO 5746
- Cutting capacity:
 - 1- Bronze wire: 1.00 mm
 - 2- Medium hard wire: 1.60-2.00-2.50 mm

		L mm	L1 mm	W1 mm	W2 mm	T1 mm			
601V-160-1	5	160	35	24	50	10	Ø1.0	Ø1.6	190
601V-180-1	5	180	38	27	50	10	Ø1.0	Ø2.0	240
601V-200-1	5	197	41.5	29.5	50	11	Ø1.0	Ø2.5	300

INSULATED FLAT NOSE PLIER


IEC 60900



- For work on live equipment, up to 1000V
- High performance steel
- Hardness: edges at 58-65 HRC
- Standard: ISO 5745

		L mm	L1 mm	W1 mm	W2 mm	T1 mm	
604V-160-1	5	158	48	17	50	9	150


INSULATED SNIPE NOSE PLIERS

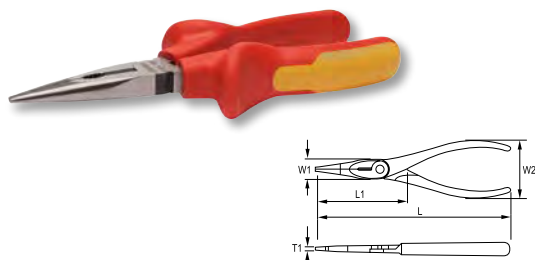

- High performance steel
- Hardness: edges at 58-65 HRc
- Standard: ISO 5746
- Cutting capacity:
 - 1- Bronze wire: 1.00 mm
 - 2- Medium hard wire: 1.60 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
612V-160-1	5	161	61.5	16.5	49	10	Ø1.0	Ø1.6	140
612V-200-1	5	201	78	18	50	10.5	Ø1.0	Ø1.6	180


INSULATED SNIPE NOSE PLIERS BENT TIP

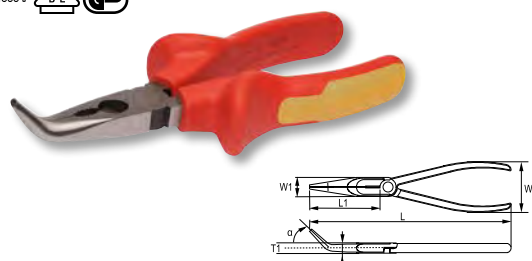

- For work on live equipment, up to 1000V
- High performance steel
- Hardness: edges at 58-65 HRc
- Angled at 45°
- Standard: ISO 5746
- Cutting capacity:
 - 1- Bronze wire: 1.00 mm
 - 2- Medium hard wire: 1.60 mm

		L	L1	W1	W2	T1	α	1 mm	2 mm	g
613V-160-1	5	158	50	18	18	9.0	45°	Ø1.0	Ø1.6	132
613V-200-1	5	197	74	18	50	10.5	45°	Ø1.0	Ø1.6	180


INSULATED SIDE CUTTING PLIERS

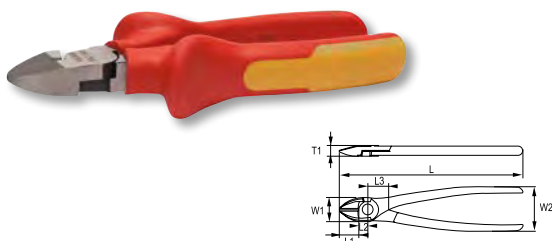

- For work on live equipment, up to 1000V
- High performance steel
- Hardness: edges at 60-65 HRc
- Standard: ISO 5749
- Cutting capacity:
 - 1- Bronze wire: 0.50 mm
 - 2- Medium hard wire: 1.60 mm

		L	L1	L2	L3	W1	W2	T1	1 mm	2 mm	g
624V-140-1	5	142	20.5	7	13	18.6	50	10.0	Ø0.5	Ø1.6	170
624V-160-1	5	155	21.5	7	13	21.6	50	11.5	Ø0.5	Ø1.6	200

INSULATED HEAVY DUTY SIDE CUTTING PLIERS

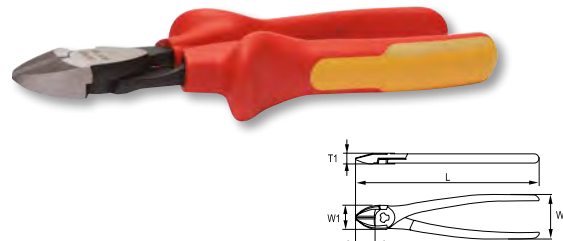


- For work on live equipment, up to 1000V
- High performance steel
- Hardness: edges at 60-65 HRc
- Standard: ISO 5749
- Cutting capacity:
 - 1- Bronze wire: 0.50 mm
 - 2- Medium hard wire: 1.80 mm

		L	L1	W1	W2	T1	1 mm	2 mm	g
625V-180-1	5	180	20.5	25.6	49	11.5	Ø0.5	Ø1.8	280



INSULATED PLIERS


INSULATED STRIPPING PLIERS

IEC 60900  1000V  

- For work on live equipment, up to 1000V
- High performance steel
- Hardness: 45-50 HRc

		L mm	L1 mm	W1 mm	W2 mm	T1 mm		
629V-160-1	5	160	40.5	19	48	9	1-6	170

INSULATED SLIP JOINT PLIERS

IEC 60900  1000V  

- For work on live equipment, up to 1000V
- High performance steel
- Hardness: teeth hardened to 50-57 HRc
- Standard: ISO 8976

		L mm	W1 mm	W2 mm	W3 mm	T1 mm	T2 mm	
634V-250-1	5	240	5	47.5	50	7.5	12.5	310

INSULATED PLIERS SETS

INSULATED PLIERS SET

IEC 60900  1000V  


- For work on live equipment, up to 1000V
- High performance steel
- Standard: IEC 60900

				
601V-3-C	1	3	270x205x40	690

624V-160-1		601V-180-1	
612V-200-1			

PINCERS AND FENCING PLIERS


CARPENTER'S PINCERS

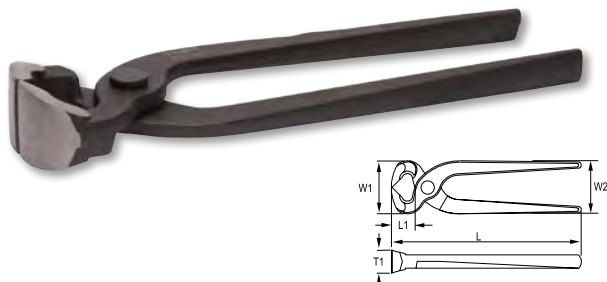

- Hardness: teeth hardened at 58-64 HRc
- Standard: ISO 5746
- Cutting capacity: Medium hard wire: 1.60 mm

IRIMO	Icon	L mm	L1 mm	W1 mm	W2 mm	T1 mm	2 mm	g
631-200-1	5	200	23	53	45	24	1.6	360


FENCING PLIERS

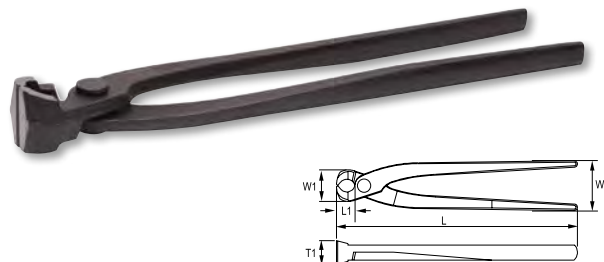

- Hardness: teeth hardened to 58-64 HRc
- Standard: ISO 9242
- Cutting capacity: Medium hard wire: 1.60 mm

IRIMO	Icon	L mm	L1 mm	W1 mm	W2 mm	T1 mm	2 mm	g
632-220-1	5	220	16	29.4	46	22	1.6	350
632-250-1	5	250	18	33	46	24.5	1.6	400
632-280-1	5	280	19	37	48	24.5	1.6	460

FENCING PLIERS WITH PVC DIPPED HANDLES

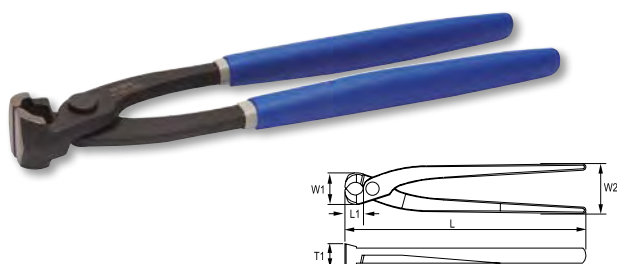

- High performance steel
- Blue dipped handles
- Hardness: teeth hardened to 58-64 HRc
- Standard: ISO 9242
- Cutting capacity 1.6 mm

IRIMO	Icon	L mm	L1 mm	W1 mm	W2 mm	T1 mm	2 mm	g
632D-250-1	5	250	18	33	46	24.5	1.6	400

BOLT CUTTERS

BOLT CUTTERS



- High performance alloy steel
- Double heat treatment on the blades
- Black finish

IRIMO	Icon	L mm	A mm	B mm	Ø 80 kg/mm²	Ø 160 kg/mm²	Ø 120 kg/mm²	g
651101	1	N. 0 320	48	77	5	4	3	500
651111	1	N. 1 470	66	104	7	6	5	1.785
651121	1	N. 2 630	85	137	9	8	7	2.860
651131	1	N. 3 750	100	160	11	9	8	4.410
651141	1	N. 4 900	120	182	13	10	9	5.800

SPARE HEAD BOLT CUTTER



IRIMO	Icon	Icon	A mm	B mm	g
651201N	+ M8	651201N2	1	651101	48 77 180
651211N	+ M10-12	651211N2	1	651111	66 104 370
651221N		651221N2	1	651121	85 137 875
651231N		651231N2	1	651131	100 160 1.295
651241N		651241N2	1	651141	120 182 1.930

CIRCLIP PLIERS

INTERNAL STRAIGHT



- Black finish for corrosion protection
- High performance alloy steel
- Straight forged tips
- Hardness: 45-50 HRc
- Standard: DIN 5256

IRIMO	Box	L mm	B mm	E mm	mm	mm	g
621551	5	140	38	0.8	8 - 13	1	80
621561	5	140	38	1.2	12 - 25	1	80
621571	5	180	57	1.7	19 - 60	1	170
621581	5	225	69	2.2	40 - 100	1	275
621591	1	310	95	3.1	85 - 165	1	490

INTERNAL BENT TIP



- Black finish for corrosion protection
- High performance alloy steel
- Curved forged tips
- Hardness: 45-50 HRc
- Standard: DIN 5256

IRIMO	Box	L mm	B mm	E mm	mm	mm	g
621651	5	127	25	0,8	8 - 13	1	80
621661	5	127	25	1,2	12 - 25	1	80
621671	5	165	43	1,7	19 - 60	1	170
621681	5	208	52	2,2	40 - 100	1	275
621691	1	289	74	3,1	85 - 165	1	490

EXTERNAL STRAIGHT



- Black finish for corrosion protection
- High performance alloy steel
- Straight forged tips
- Internal spring
- Hardness: 45-50 HRc
- Standard: DIN 5254

IRIMO	Box	L mm	B mm	E mm	mm	mm	g
621751	5	140	38	0.8	3 - 10	1	80
621761	5	140	38	1.2	10 - 25	1	80
621771	5	180	57	1.7	19 - 60	1	170
621781	5	225	69	2.2	40 - 100	1	275
621791	1	295	95	3.1	85 - 165	1	490

EXTERNAL BENT



- Black finish for corrosion protection
- High performance alloy steel
- Bent forged tips
- Internal spring
- Hardness: 45-50 HRc
- Standard: DIN 5254

IRIMO	Box	L mm	B mm	E mm	mm	mm	g
621851	5	127	25	0.8	3 - 10	1	80
621861	5	127	25	1.2	10 - 25	1	80
621871	5	165	43	1.7	19 - 60	1	170
621881	5	208	52	2.2	40 - 100	1	275
621891	1	295	74	3.1	85 - 165	1	490

CIRCLIP PLIERS SET



- Black finish for corrosion protection
- High performance alloy steel
- Forged tips
- Hardness: 45-50 HRc

IRIMO	Box	X	mm	g
601911	1	4	260x220x30	750

621571			621671		
621771			621871		

LOCKING PLIERS

UNIVERSAL, CURVED JAWS WITH WIRE CUTTER



- General purpose, holds bars and sheets, nuts and bolts
- Strong jaws, drop forged
- Chrome molybdenum steel
- Nickel plated

		A	B	C	D	E	F	G	Fe+mm	g
64A-190-1	190	31	40	12	0-20	7	5	2	338	358
64A-235-1	225	38	48	12	0-35	7	6	3	543	556

UNIVERSAL, STRAIGHT JAWS



- Holds metal sheet, small bars and thin pieces
- Strong jaws, reinforced. Drop forged
- Chrome molybdenum steel
- Nickel plated

		A	B	C	D	E	F	G
64B-190-1	1	190	29	42	15	0-17	13	358
64B-235-1	1	225	32	54	17	0-21	13	556

LONG NOSE



- Long reach jaws. Drop forged
- Jaws have flat and round holding shapes
- Chrome molybdenum steel
- Nickel plated

		A	B	C	D	E	F	G
64L-165-1	1	165	52	25	9	6	0-18	195

WELDING



- U shape jaws provides accessibility and good vision in welding jobs
- Jaws beam-shaped to increase strenght
- Chrome molybdenum steel
- Nickel plated

		A	B	C	D	E	F	G
64W-300-1	1	263	75	70	75	70	44	832

STEEL CLAMP



- C shape to hold bulky parts
- Chrome vanadium steel
- Nickel plated

		A	B	C	D	E	F	G
64C-300-1	1	275	90	140	14	0-65	7	775

LOCKING PLIERS

STEEL CLAMP, SWIVEL PADS



- C shape to hold bulky parts
- Swivel pads to hold non parallel and uneven parts
- Chrome vanadium steel
- Nickel plated

		A mm	B mm	C mm	D mm	E mm	F mm	G mm
64CA-175-1	1	175	61	90	21	0-32	5	276
64CA-300-1	1	280	95	130	28	0-72	7	835
64CA-450-1	1	460	270	150	28	0-130	7	1280


STEEL CLAMP, SWIVEL PADS, SLIM



- Long reach
- Swivel pads to hold non parallel and uneven parts
- Chrome molybdenum steel
- Nickel plated

		A mm	B mm	C mm	D mm	E mm	F mm	G mm
64CAD-300-1	1	282	97	81	28	0-72	7	850

TABLE C CLAMP

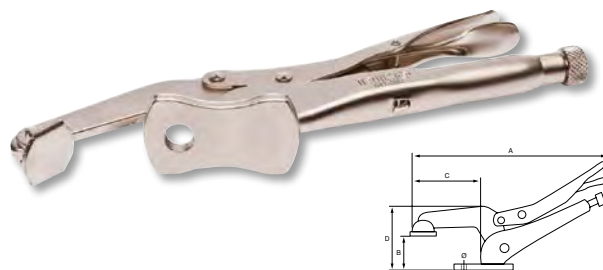

- Swivel pad to hold non parallel and uneven parts
- Hidden lever to avoid unwanted unlocking
- Chrome molybdenum steel
- Nickel plated

		A mm	B mm	C mm	D mm	Ø mm	G mm
64T-300-1	1	300	0-80	95	90	12.4	650

4 POSITION PLIERS



- Chrome-plated for good rust protection
- Shape: with flat and convex jaws that can be adjusted in 4 different positions for an increased gripping capacity
- Application: holds most L, T and U profiles
- Retail packed

		A mm	B mm	C mm	D mm	E mm	F mm	G mm
647-235-1	1	235	37	59	17	10	15	540


4 POSITION PLIERS



- Chrome-plated for good rust protection
- Shape: with flat and convex jaws that can be adjusted in 4 different positions for an increased gripping capacity
- Extra long jaws with twice as large gripping capacity compared to standard model
- Application: holds most L, T and U profiles
- Retail packed

		A mm	B mm	C mm	D mm	E mm	F mm	G mm
647-250-1	1	255	67	64	17	10	15	650

CURVED JAWS WITH CUTTER

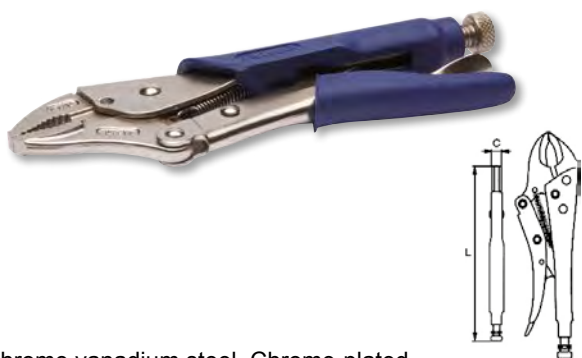

- Chrome vanadium steel. Chrome-plated
- Shape: curved jaws for general purpose
- Soft grip two-component handle

		L mm	C mm	g mm	g
648-140-1	1	140	7	28	160
648-185-1	1	185	8.5	41	345
648-250-1	1	225	10.5	48	525

LONG NOSE



- Chrome vanadium steel. Chrome-plated
- Shape: long slim jaw design
- Soft grip two-component handle

		L mm	C mm	g mm	g
648-165-1	1	165	4.2	57	180

SOFT GRIP PLIERS SET



- Two-component handle
- Rolling nylon pouch

				g
648-4-W	1	4		1.200
648-140-1, 648-185-1, 648-250-1				
648-165-1				

AUTOMATIC HAND VICES



- Finish: black
- Shape: locking clamp with movable jaw for increased flexibility and general purpose work
- Application: for production or maintenance applications and general purpose work

		A mm	B mm	C mm				g
645011	1	193	30	32	645-L075	645-YOKE	645-NUT	690
645021	1	196	30	70	645-L120	645-YOKE	645-NUT	765
645031	1	240	62	70	645-L120	645-YOKE	645-NUT	935
645041	1	240	62	150	645-L200	645-YOKE	645-NUT	1.180

RIVETING TOOLS

HAND RIVETER



- Riveter with four different exchangeable heads for rivet sizes of 1.8-2.2-2.8-3.2 mm
- To be used with aluminium, steel, stainless steel and copper rivets
- Includes a wrench for changing heads

		L mm	A mm	B mm	g
546-265-1	1	265	90	25	700



	Spares for hand riveter 546-265-1	
546-265-A	Jaw mechanism	1
546-265-B	Mouthpieces set	1

2 ARM RIVETER



- Riveter with long handles for greater leverage
- To be used with aluminium, steel and stainless rivets
- The transparent tube collects snapped off rivet tails

		A mm	B mm	C mm	D mm	g
546021	1	520	22	58	160	1.800



	Spare parts 546021
546201	Nosepiece of Ø 4 mm
546211	Nosepiece of Ø 5 mm
546221	Nosepiece of Ø 6-6.4 mm
546251	3 jaws set
1467-A01	Transparent tube

NUT RIVETER SET



- To create a threaded fixing where there is little or no access to the rear of a panel
- Supplied with the inserts for the different rivet nut sizes as well as the necessary tools to assemble and disassemble those inserts
- To be used with aluminium, steel and stainless steel nuts of M3-M4-M5-M6

		L mm	A mm	B mm	g
548-275-1	1	270	100	23	700



	Spares for hand riveter 548-275-1	
548-275-M3	M3 insert	1
548-275-M4	M4 insert	1
548-275-M5	M5 insert	1
548-275-M6	M6 insert	1

HAND RIVETER SET WITH RIVETS




- 265 mm riveter with four different exchangeable heads for rivet sizes of 2.4 mm; 3.0-3.2 mm; 4.0 mm and 4.8 mm
- Includes a wrench for changing heads
- To be used with aluminum, steel, stainless steel and copper rivets
- 160 rivets (40 of each size)
- Blow molded case

					g
546-265-4	1	160 + 1	300x210x60		1.200

ELECTRICIAN'S SCISSORS AND KNIVES

9 MM SNAP OFF KNIFE



85 x 9 x 0.50 mm



667-135-1

12

133

56

18 MM SNAP OFF KNIFE



112 x 18 x 0.50 mm



666-156-1

12

157

106

SAFETY UTILITY KNIFE



60 x 19 x 0.635 mm



- Autoretractil blade for safety purposes




668-150-1

12

150

157

SAFETY UTILITY KNIFE



60 x 19 x 0.635 mm



- Auto retractil blade when cutting is finished and operation button is released
- Easy Open System (EOS)




669-175-1

10

175

210

GLASS SCRAPER WITH INTERCHANGEABLE BLADES



standard blade

19 mm

38.4 mm



- Ideal for removing paint, glue, putty or stickers from glass, tile, walls, floors and other smooth surfaces
- Ergonomic two-component design for comfortable no-slip grip
- Blade retracts for safe storage
- Internal storage compartment (includes 5 blades)
- Good size to fit in the palm of your hand.
- Scraper length 130 mm
- Uses standard sing-edge razor blades
- Blade width: 40 mm




538-140-1

1

135

65

MULTIPURPOSE TRADESMAN KNIVES WITH SHEATH



- Comfortable handle provides excellent grip
- Supplied with a practical sheath for belt carrying
- Robust multipurpose knife with a solid stainless steel blade



A mm

L mm



672-220-1

12

100

220

233

ELECTRICIAN'S SCISSORS AND KNIVES

FOLDABLE KNIFE



- 3Cr13 Stainless Steel
- Retail pack
- Light and comfortable
- Belt clip included
- Strong cutting tool
- Blade thickness 2.3 mm

R		A mm	L mm	g
670-178-1	10	78	178	120

FOLDABLE KNIFE



- Black 3Cr13 Stainless Steel
- Retail packaging
- Black finishing
- Comfortable and strong cutting tool
- Belt clip included
- Blade thickness 2.6 mm

R		A mm	L mm	g
669-190-1	10	77	190	130

ELECTRICIANS' KNIFE



- Electrician's pocket folding knife
- Wire stripping shape with wooden handle

R		A mm	L mm	g
664-200-1	10	85	200	83

ELECTRICIANS' KNIFE



- Electrician's pocket folding knife
- Stainless steel blade with plastic handle
- Wire stripping shape

R		A mm	L mm	g
665-200-1	10	85	200	60

MULTITOOL



- Foldable Knife
- 3Cr13 Stainless Steel
- Comes with clip
- Length: 96 mm closed / 150 mm overall
- Pouch included for easy transport
- Multi tool for all purposes with:
 - Needle Nose Pliers
 - Wire cutter
 - Slotted screwdriver
 - Small Slotted screwdriver
 - Medium Slotted screwdriver
 - Large slotted screwdriver
 - Phillips Screwdriver
 - Regular Pliers
 - Can Opener
 - Saw
 - Wood / Metal File
 - Slotted screwdriver
 - Scissors
 - Bottle opener

R		L mm	g
671-150-1	10	150 (96)	255

ELECTRICIANS' SCISSORS



- Electrician's scissors with plastic coated finger loops
- Small groove in the blade for stripping cables
- 43 mm cutting length

		A mm	L mm	g
661051	10	42.5	130	70

ELECTRICIANS' SCISSORS



- Electrician's scissors with longer handles, plastic coated finger loops
- Small groove in the blade for stripping cables
- Better access to confined spaces
- Requiring less cutting force
- 38 mm cutting length

		A mm	L mm	g
661061	10	38	152	130

ELECTRICIANS' SCISSORS



- Electrician's scissors with plastic coated finger rings
- Professional use. Integrate steel structure
- Micro serrated blade
- 43 mm cutting length
- Rotary belt holster

		A mm	L mm	g
661-140-1	12	43	145	76



- Display for 12 scissors

661-140-12-DISP	1	

HOOKS AND PICKING TOOLS

MINI PICK AND HOOK SET, 4 pieces




- Used for scratching, manipulating or removing O-rings, springs, welding,...
- 170 mm length
- Two-component Soft grip handle
- Material: Carbon steel blades, hardened tips
 - 1 pc straight pick,
 - 1 pc angle hook,
 - 1 pc full hook,
 - 1 pc 90° hook

				g
722-4-1	12	4	20x230x130	100


10.

PULLING TOOLS

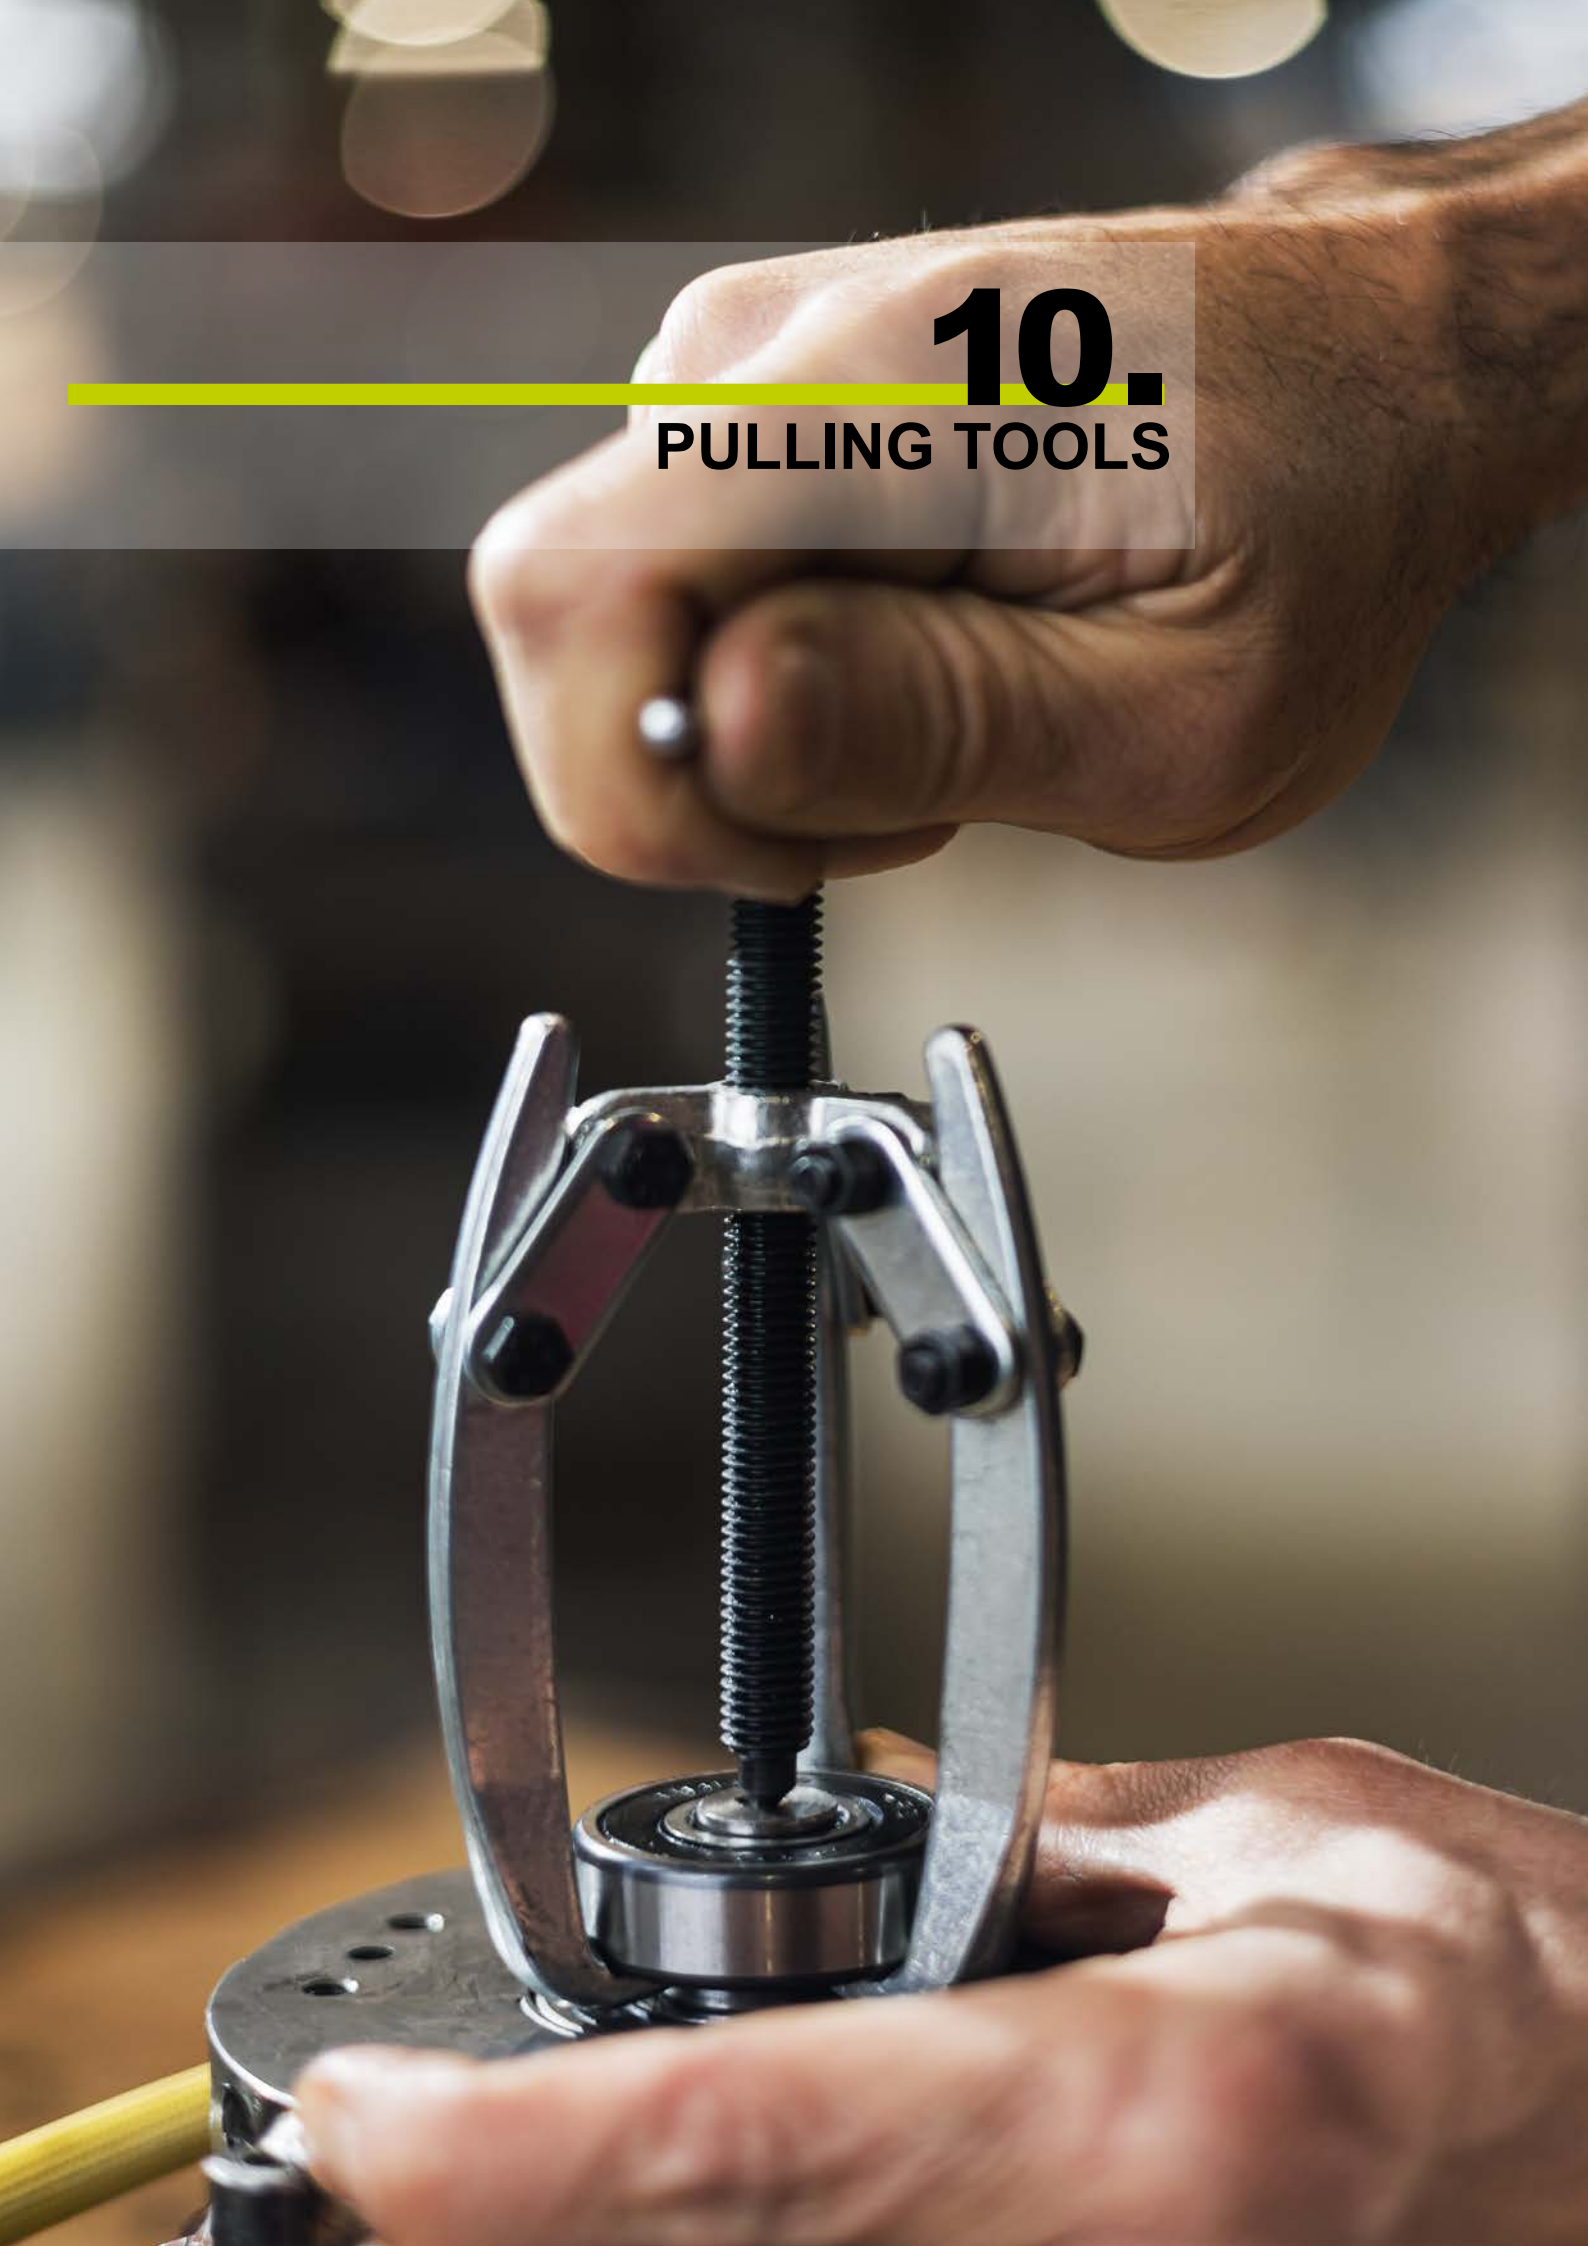


PULLERS

UNIVERSAL 2 ARM PULLERS

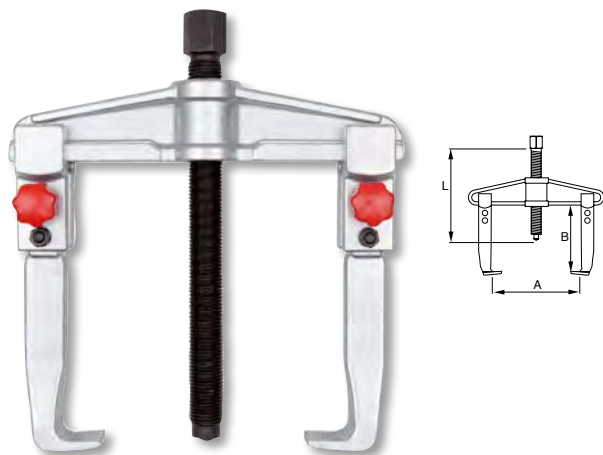


- Body and arms manufactured from forged steel
- Beam shape section light and strong
- Finish: galvanised, with induction hardened spindle
- By reversing the arms, the extractor can be used as internal or external
- Protective case on screw top for easy use
- Quick-adjust screws for an easy and quick fitting

R			A mm	B mm	L mm	Tn mm	g
701-90-1	N1	1	90	100	130	4	900
701-130-1	N11	1	130	100	130	4	980
701-160-1	N2	1	160	150	210	6	2.450
701-200-1	N21	1	200	150	210	6	2.880
701-250-1	N3	1	250	205	280	8	6.950
701-350-1	N31	1	350	205	280	8	7.680




R	R	mm	mm	g	R	L mm	g	R	L mm	g
701-90-1	701-90-S	17	M14x1.5x130	175	701-90-K	95	528	701-90-B	136	315
701-130-1	701-90-S	17	M14x1.5x130	175	701-90-K	95	528	701-130-B	177	485
701-160-1	701-160-S	22	M20x2x210	575	701-160-K	150	1.058	701-160-B	217.5	890
701-200-1	701-160-S	22	M20x2x210	575	701-160-K	150	1.058	701-200-B	262	1.360
701-250-1	701-250-S	27	M27x2x280	1.275	701-250-K	202	3.262	701-250-B	330	2.750
701-350-1	701-250-S	27	M27x2x280	1.275	701-250-K	202	3.262	701-350-B	430	3.575

SELF-CENTERING 2 ARMS PULLERS

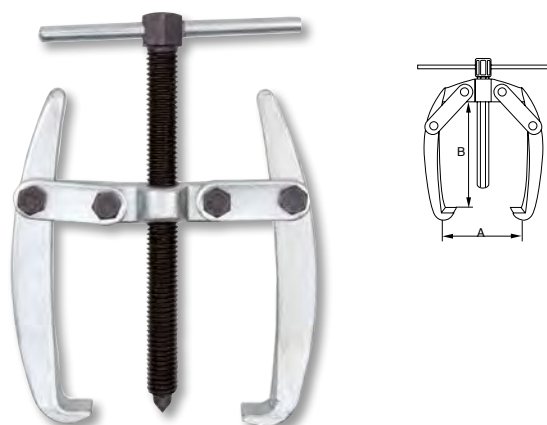


- Body and arms manufactured from forged steel
- Finish: galvanised, with induction hardened spindle
- Ideal for removing small parts such as battery terminals, pulleys, wheels, ball bearings, etc.
- Automatic gripping

R		A mm	B mm	L mm	g
702-40-1	1	60	40	0.50	180
702-65-1	1	65	65	0.50	190
702-80-1	1	80	80	1.00	220



	  mm		 L mm		  mm  H		  mm  H	
702-40-1	702-40-S M10x1.5x100	61	702-40-K 54.5	40	702-40-B 42x13 20		702-40-P 33.5x3	20
702-65-1	702-65-S M10x1.5x105	63	702-65-K 88	74				
702-80-1	702-80-S M10x1.5x122	72	702-80-K 103	98				

SELF-CENTERING 3 ARMS PULLERS






- Body and arms manufactured from forged steel
- Finish: galvanised, with induction hardened spindle
- Ideal for removing small parts such as battery terminals, pulleys, wheels, ball bearings, etc.
- Automatic gripping

R		A mm	B mm	$\frac{1000}{T_n}$	g
703-40-1	1	60	40	0.75	230
703-65-1	1	65	65	0.75	290
703-80-1	1	80	80	1.50	320



R	R	mm	g	R	L mm	g	R	L mm	g	R	L mm	g
703-40-1	702-40-S	M10x1.5x100	61	702-40-K	54.5	40	703-40-B	42x13	20	702-40-P	33.5x3	20
703-65-1	702-65-S	M10x1.5x105	63	702-65-K	88	74						
703-80-1	702-80-S	M10x1.5x122	72	702-80-K	103	98						

MULTIPLE PULLERS

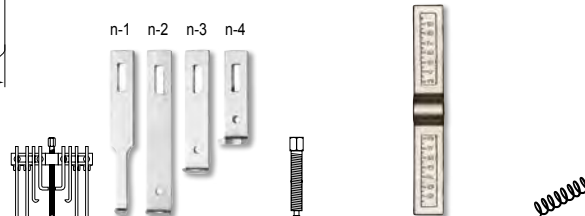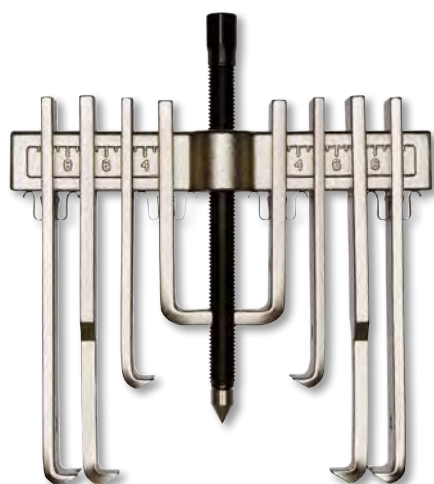

- Can be used as internal and external puller
- Two or more legs can be attached in line, obtaining greater reach

R		A (mm) min. - max.	B (mm) min. - max.	$\frac{1000}{T_n}$	g
713001	1	20 - 173	65 - 140	5	2.700
713011	1	75 - 250	77 - 182	10	6.000

R	R	R	R	R
713001	796511 n-1	796491	796501	796551
	796521 n-2			
	796531 n-3			
	796541 n-4			
713011	713511 n-1	713611	796561	796571
	713521 n-2			
	713531 n-3			
	713541 n-4			

EXTRACTORS

STUD EXTRACTORS SETS



- To remove broken screws, studs and pipes
- Finish: grinded
- Material: High-quality carbon steel

716-5-1	1	90x58x15	5	# 1, 2, 3, 4, 5	M3-M18	120
716-8-1	1	215x130x50	8	# 1, 2, 3, 4, 5, 6, 7, 8	M3-M50	840

	#	mm	Ø mm	L mm		
716-M6-1	1	2.0	4.00	50	M 3-6	4
716-M8-1	2	2.8	4.30	58	M 6-8	6
716-M11-1	3	4.0	6.00	65	M 8-11	13
716-M14-1	4	6.3	7.50	75	M 11-14	20
716-M18-1	5	7.5	10.70	80	M 14-18	45
	6	10.3	15.00	85	M 18-25	95
	7	13.5	19.00	92	M 25-35	140
	8	20.6	24.00	97	M 35-50	240


TAP WRENCH



- With reversible ratchet: forward - reverse - locked
- Parallel clamping action
- Hardened jaws
- Sliding handle
- Chrome-plated steel

		mm	mm	
718211	1	2.6 - 5.5	85	180
718231	1	4.6 - 8	110	300

NUT SPLITTERS



- For splitting jammed or stripped nuts without damaging the stud thread
- Galvanised and gunmetal finish
- Material: special steel
- Suitable for nuts up to quality grade 6

		A mm	L mm				
730011	1	32	126	M3-M16	6-27	440	796661 796671
730131	1	42	170	M14-M24	24-40	560	796681 796691

PICK-UP TOOLS

MAGNETIC PICK-UP TOOLS



- Two component handle, with hanging hole and anti-roll design
- Polished and chrome-plated
- Blade finish: chrome-plated and polished
- 720-1M-413 has neodymium magnet with capacity of 1 kg and
- 720-3M-413 has neodymium magnet with capacity of 3 kg

		Ø mm	A mm	L mm			
720-1M-413	1	10	10	550	413	110	130
720-3M-413	1	17	13	550	413	110	280


CLAW PICK-UP TOOL



- For gripping small parts
- Flexible shaft with steel core
- Finish: chrome-plated

720031	1	650	80

CLAW PICK-UP TOOL

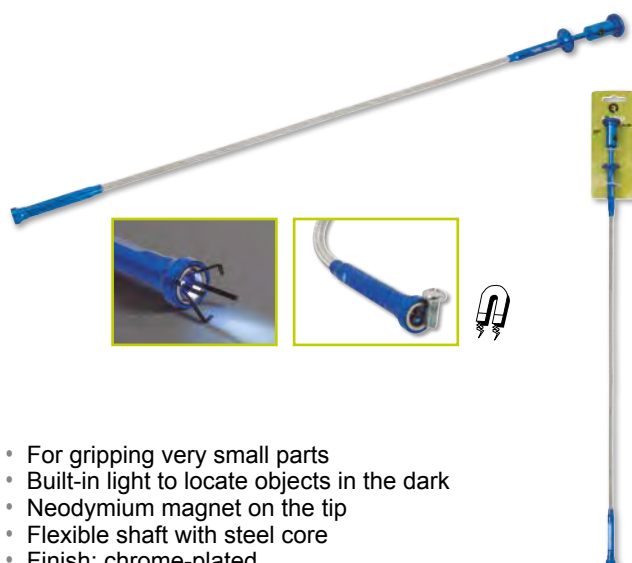


- For gripping very small parts
- Built-in light to locate objects in the dark
- Neodymium magnet on the tip
- Flexible shaft with steel core
- Finish: chrome-plated

720-LM-1	1	625	120

PRY BARS

PRY BAR

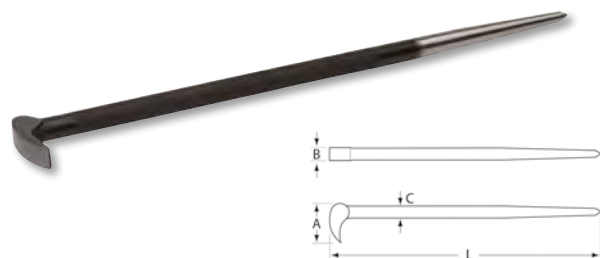

- 90° special lever. Suitable for work in confined spaces such as behind gears
- Finish: black phosphated with polished head and pointed tip
- Material: hardened special alloy steel

066-400-1	1	44	14	14	406	450


OFFSET LEVER SET



- Pry bars for easy prying and bending
- Plastic handles with lightweight design offers a comfortable grip as well as powerful leverage capacity

ZH70610	1	645x115x35	1.400

ZH70611, ZH70612, ZH70613, ZH70614



OFFSET LEVER



- Pry bars for easy prying and bending
- Plastic handles with lightweight design offers a comfortable grip as well as powerful leverage capacity

ZH70611	1	210	200
ZH70612	1	310	300
ZH70613	1	460	400
ZH70614	1	610	500

SHEET PUNCHES

SHEET METAL PUNCHES



- Screw hole punches
- For a 16 to 50 mm hole diameter
- Ground cutting areas for an easier cut
- Hexagonal head bolt
- For steel sheet plates up to 2 mm thick
- For stainless steel sheet plates up to 1.2 mm thick
- Individual packaging

		$\varnothing$ mm		
740-016-2	1	16	M 8	80
740-020-2	1	20	M 10	120
740-022-2	1	22	M 10	160
740-025-2	1	25	M 10	180
740-030-2	1	30	M 12	320
740-035-2	1	35	M 12	500
740-040-2	1	40	M 14	660
740-050-2	1	50	M 14	1.040

SPARE BOLT



- Spare bolts for sheet metal punches 740 Series
- M8 to M14 Standard bolt
- Sold in a kit

		$\varnothing$ mm
740S-008-2	6	M 8
740S-010-2	6	M 10
740S-012-2	6	M 12
740S-014-2	6	M 14

11.

CUTTING TOOLS & MEASURING



BOWSAW FRAMES AND BLADES


BOWSAW FRAMES



- Powder painted steel tube bowsaw
- 802-2400-1 for dry wood (52)
- 802-3000-1 & 802-3600-1 for wet wood (23)
- Tooth protector included

						
802-2400-1	5	607	24"	51	675	23.8
802-3000-1	5	759	30"	23	800	28.2
802-3600-1	5	912	36"	23	920	32.4

BOWSAW BLADES, GREEN WOOD



- Suitable for sawing in green wood - wet wood
- Hardened and tempered high-quality steel
- Rust prevention treated and packed in individual sleeve

802-2423-1	10	607	24"	60	2.1
802-3023-1	10	759	30"	75	2.6
802-3623-1	10	912	36"	95	3.4

BOWSAW BLADES, DRY WOOD



- For cutting dry, seasoned wood
- Hardened and tempered high-quality steel
- Rust prevention treated and packed in individual sleeve

802-2451-1	10	607	24"	65	2.3
802-3051-1	10	759	30"	80	2.8
802-3651-1	10	912	36"	100	3.5

HANDSAW & HACKSAWS

TENON SAW



- Tenon saw for fine and medium thick materials, specially adapted for cutting of small-diameter timber and mitre guide sawing
- Hardpoint universal teeth for long lasting sharpness
- Heavy steel back for rigidity and accurate cutting
- Screwed plastic handle

800-131-1	10	300	12"	15/16	450

GENERAL PURPOSE HANDSAW



- General purpose saw with fine teeth for smooth sawing in a wide variety of materials, including aluminium, plastics, laminates, wood and chipboard
- Hardpoint fleam-toothing
- Toolbox size
- Screwed 1-piece plastic handle
- Ideal to carry in a toolbox

800-151-1	4	300	12"	15/16	225

DOVETAIL FLEX HANDSAW



- Saw blade for cutting wood & plastic materials
- Universal tothing, hardpoint teeth for long lasting sharpness
- Light steel back for rigidity
- Angled wooden handle to allow flush cutting
- Handle swings to allow both left and right hand sawing where access is restricted

800-111-1	4	250	10"	15/16	240



COMPASS SAW



- Compass saw for all kinds of wood and plastic material
- Hardpoint universal teeth for long lasting sharpness
- Screwed, plastic handle

800-141-1	4	300	12"	7/8	120



ALUMINIUM HACKSAW FRAME



- Supplied with 300 mm (12") reliable and shatterproof bi-metal blade 24 TPI
- A professional and strong hacksaw frame
- Alternative 55° blade mounting for flush cutting

801101	5	400 (300)	24	748	

HACKSAW FRAME

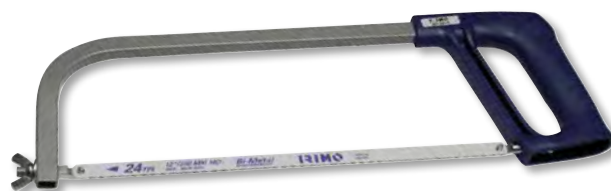

- Traditional design
- Easy to use hacksaw frame

		A mm	H mm	L mm	
801-041-1	10	110	151	400	665


BI-METAL

- Shatterproof bi-metal blade with precision teeth for all kinds of metal sawing
- Bi-metal blade is guaranteed to keep its sharpness for a long time
- Packaging:
5 Blades in a hanging clip



		LxWxT mm	TPI	
803-318-5	5	300x13x0.65	18	17
803-324-5	5	300x13x0.65	24	17
803-332-5	5	300x13x0.65	32	17

- Packaging:
50 Blades in a plastic box

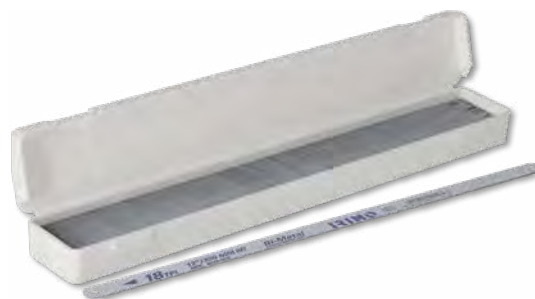

		LxWxT mm	TPI	
803-318-50	50	300x13x0.65	18	17
803-324-50	50	300x13x0.65	24	17
803-332-50	50	300x13x0.65	32	17

HANDSAW & HACKSAWS


ALUMINIUM HOLDER



- A useful mini-hacksaw for small spaces

R		L mm	H mm	L mm	g
801-145-1	5	51	229	140	

HACKSAW FRAME

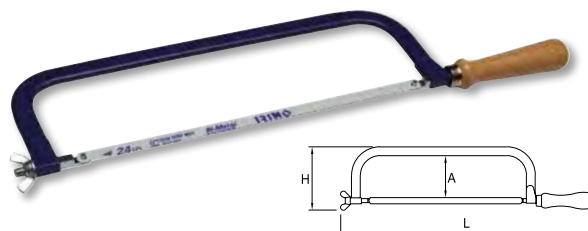

- A traditional designed, easy to use hacksaw frame

R		A mm	H mm	L mm	g
801-011-1	10	100	128	512	575

HOLESAWS

HOLESAW SET, 9 pieces




- Bi-metal hole saw set of 9 pieces:
 - 6 pcs hole saws sizes 22, 29, 35, 44, 51 and 64 mm
 - 1 pc holder for big size hole saws (inc. Pilot drill)
 - 1 pc holder for small size hole saws (inc. Pilot drill)
 - 1 pc extra replacement Pilot drill

R					g
810-2264-4	1	9	230x180x70	1.000	

FILES

FLAT FILES

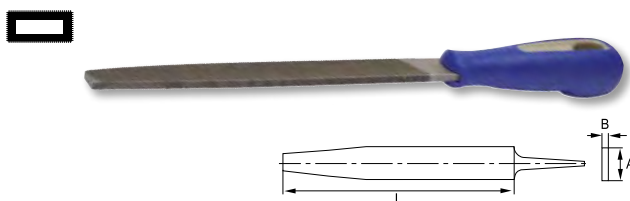

- Edges tapered towards the point, surface parallel
- Surface double cut, edges single cut
- Type of cut: 1 = bastard, 2 = double

R		L mm	A mm	B mm				g
534521	6	150 / 6"	16	4	1	13	33	90
534531	6	200 / 8"	20	5	1	10	25	160
534541	6	250 / 10"	25	5.5	1	9	23	250
534551	6	300 / 12"	30	6	1	8	20	413
534251	6	150 / 6"	16	4	2	18	46	250
534261	6	200 / 8"	20	5	2	14	36	160


HAND FILES



- Edges and surfaces parallel
- Surface double cut, one edge uncut and one edge single cut
- Type of cut: 1 = bastard, 2 = double

R		L mm	A mm	B mm				g
534561	6	150 / 6"	16	4	1	13	33	90
534571	6	200 / 8"	20	5	1	10	25	160
534281	6	150 / 6"	16	4	2	18	46	50
534291	6	200 / 8"	20	5	2	14	36	160

HALF ROUND FILES

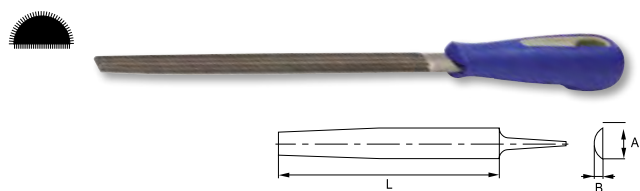

- Edges and surfaces tapered towards the point
- Double cut
- Type of cut: 1 = bastard, 2 = double

			L mm	A mm	B mm				
534681	6		150 / 6"	16	4.7	1	13	33	100
534691	6		200 / 8"	20.5	6	1	10	25	170
534701	6		250 / 10"	26.5	7.5	1	9	23	344
534371	6		150 / 6"	16	4.7	2	18	46	100
534381	6		200 / 8"	20.5	6	2	14	36	170


ROUND FILES



- Tapered towards the point
- Double cut
- Type of cut: 1 = bastard, 2 = double

			L mm	A mm	B mm				
534601	6		150 / 6"	16	4.7	1	13	33	100
534611	6		200 / 8"	20.5	6	1	10	25	170
534621	6		250 / 10"	26.5	7.5	1	9	23	344
534311	6		150 / 6"	16	4.7	2	18	46	100
534321	6		200 / 8"	20.5	6	2	14	36	170


THREE SQUARE FILES

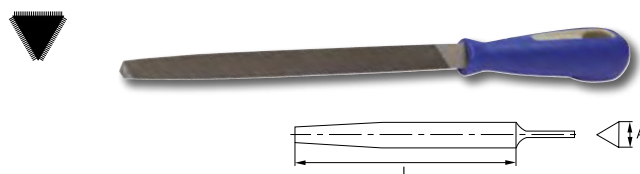

- Equilateral triangle, tapered towards the point
- Double cut surface
- Type of cut: 1 = bastard, 2 = double

			L mm	A mm				
534901	6		150 / 6"	11	1	13	33	94
534341	6		150 / 6"	11	2	18	46	94
534351	6		200 / 8"	15.5	2	14	36	203

SQUARE FILES

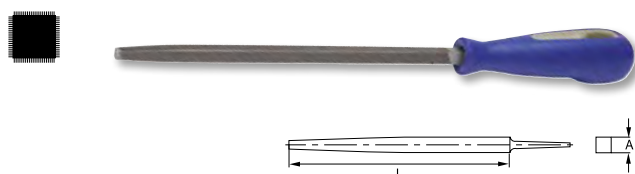

- Surface tapered towards the point
- Double cut surface
- Type of cut: 1 = bastard, 2 = double

			L mm	A mm				
534931	6		150 / 6"	6	1	13	33	79
534941	6		200 / 8"	8	1	10	25	132
534401	6		150 / 6"	6	2	18	46	79
534411	6		200 / 8"	8	2	14	36	132


FILE SET



534501	1	6		44x37x3	1.150
534261					
534291					
534321					
534351					
534381					
534411					


SPIRIT LEVELS

SPIRIT LEVELS

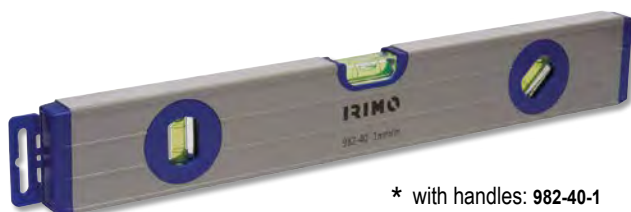

- Accuracy ± 1 mm/m
- High visibility, barrel shape acrylic vials
- Three vials: horizontal, vertical and 45°
- Light aluminium material 1.5 kg/m
- Strong profile design. Milled top and bottom measuring surfaces
- Long lasting epoxy painting



R		A mm	B mm	L mm	g
982-40-1	1	24	60	400	300
982-60-1	1	24	60	600	360
982-80-1	1	24	60	800	550



- Two magnets
- Separating force 9 Newton
- Three vials: horizontal, vertical and 45°

R		A mm	B mm	L mm	g
982-4M-1	1	22	60	400	280
982-6M-1	1	24	60	600	370

SPIRIT LEVELS




- Aluminium tube, light, 450 g/m
- Tube is slim, easy to carry, size 20 x 49 mm
- Accuracy ± 0.5 mm/m
- High visibility vials
- Three vials: horizontal, vertical and 45°
- Protective end caps
- Long lasting epoxy painting

R		A mm	B mm	L mm	g
981-400-1	1	20	49	400	175
981-600-1	1	20	49	600	215
981-800-1	1	20	49	800	275
981-1000-1	1	20	49	1.000	325
981-1200-1	1	20	49	1.200	380
981-1500-1	1	20	49	1.500	480
981-1800-1	1	20	49	1.800	550
981-2000-1	1	20	49	2.000	605

- Aluminium tube, light, 450 g/m
- Tube is slim, easy to carry, size 22 x 49 mm
- Accuracy ± 0.5 mm/m
- High visibility vials
- Three vials: horizontal, vertical and 45°
- Two built in magnets
- Protective end caps
- Long lasting epoxy painting

R		A mm	B mm	L mm	g
981-400M-1	1	22	49	400	300
981-600M-1	1	22	49	600	450


SET OF LEVELS



- Set of 2 levels:
Spirit level 600 mm + Torpedo level
- Aluminium tube, 530 g/m
- High visibility and low density liquid inside the vials
- Torpedo level 982-TOR

		A mm	B mm	L mm	g
982-SET	1	55	60	600	410



TORPEDO LEVEL



- Magnet in the base
- Suitable for plumbers
- 3 vials: horizontal, vertical and 45°
- ± 1 mm/m accuracy in horizontal vial
- ± 1 mm/m accuracy in vertical vial
- High visibility liquid inside the vials

		A mm	B mm	L mm	g
982-TOR-1	1	15	40	230	80

POCKET SPIRIT LEVEL, 100 MM

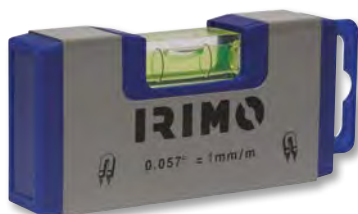

- Pocket level 10 cm
- Accuracy ± 1 mm/m
- High visibility, barrel shape acrylic vials
- Removable hanging clip
- Long lasting epoxy painting
- 2 strong magnets hidden inside profile, they hold 500 g
- Profile 1.0 mm thickness and weight of 295 g/m

		A mm	B mm	L mm	g
982-10-1	1	20	50	100	60


ALUMINUM LEVEL WITH HOLSTER



- Strong magnet with neodyms
- High quality vials
- With textile pouch for easy transport

					g
983-25-1	5	240x140x25			315

MEASURING TAPES

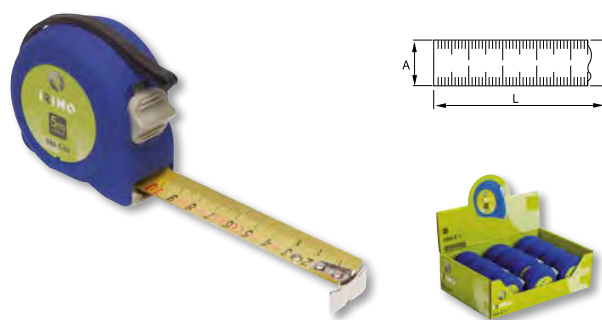

- According to EU Measuring Instruments Directive
- Class II accuracy
- ABS case with thermo rubber coating
- Blade locking system
- Wrist strap
- Metal belt clip
- High quality 50C steel blade
- 3 rivets on stopper

* Counter display when ordering 12 pieces


€		A mm	L m	g
980-3-1	12	16	3	140
980-5-1	12	19	5	180
980-5-25-1	12	25	5	175

- According to EU Measuring Instruments Directive
- Class II accuracy
- ABS case with thermo rubber coating
- Blade locking system
- Wrist strap
- Metal belt clip
- High quality 50C steel blade
- 3 rivets on stopper

* Counter display when ordering 12 pieces

€		A mm	L m	g
980-3B-1	12	16	3	125
980-5B-1	12	19	5	195
980-8B-1	12	25	8	370

TAPE TWINPACK

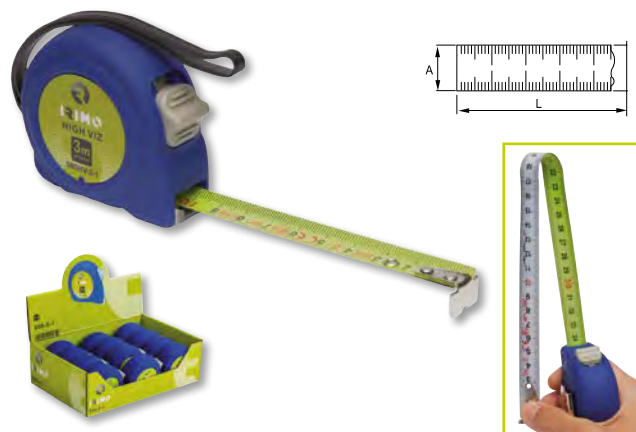

- Measuring tapes twin pack mm
3 m x 16 mm & 10 m x 25 mm


€		A mm	L m	g
980-TP2-1	12	2	170x80x42	549

- Special green color of the blade for high visibility
- Vertical marking in the back side
- Back side marking allows easy vertical measurement and marking
- According to EU Measuring Instruments Directive
- Class II accuracy
- ABS case with thermo rubber coating
- Blade locking system
- Wrist strap
- Metal belt clip
- High quality 50C steel blade nylon coated resistant to abrasion
- 3 rivets on stopper hook

* Counter display when ordering 12 pieces

€		A mm	L m	g
980HV-3-1	12	16	3	105
980HV-5-1	12	19	5	175

MEASURING TAPE FOR VERTICAL MEASUREMENTS

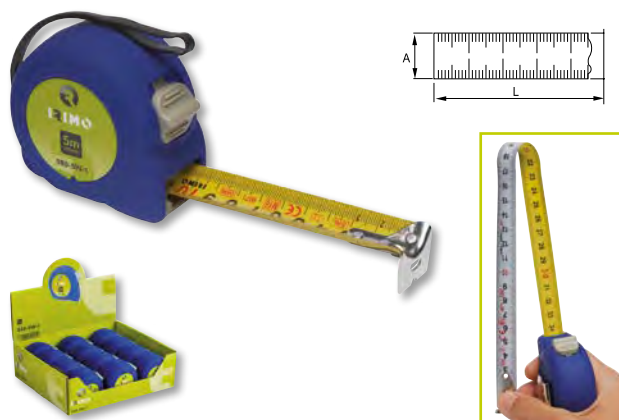

- Measuring tape 5 m x 30 mm wide
- Marked in mm in both sides
- Vertical marking in the back
- * Counter display when ordering 12 pieces

		A mm	L m	
980-5W-1	12	30	5	295

LONG TAPE



- According to EU Measuring Instruments Directive
- Class II accuracy
- ABS case with thermo rubber grip
- High quality 50C steel blade
- Stopper with ring and foldable jaw
- Belt clip
- Quick wind mechanism
- Individual box that can be hung

		A mm	L m	
980-20S-1	12	13	20	350

WOODEN FOLDING RULE



- 10 blades wooden folding rule
- Birch wood, flexible and resistant
- Special varnish resistant to abrasion
- According to EU Measuring Instruments Directive
- Class III

		A mm	L m	
985-2-1	1	16	2	115

SQUARES

SQUARES



- Scale in mm
- Stainless steel blade
- Aluminium handle

		L mm	g
991-200-1	1	200	230
991-250-1	1	250	250
991-300-1	1	300	290
991-400-1	1	400	330

COMBINATION SQUARES



- Scale in mm and inches
- Stainless steel blade
- Includes a level with 1 mm/m accuracy
- Zinc handle and brass parts

		L mm	g
993-150-1	1	150	200
993-300-1	1	300	230
993-400-1	1	400	260

GAUGE SETS

SCREW PITCH GAUGE SET



- Blade length: 70 mm

			g
972-52-1	25	52 blades	65
Metric 60° - 0.25 to 6 mm			
0.25-0.30-0.35-0.40-0.45-0.50-0.60-0.70-0.75-0.80-0.90-1-1.25-1.50-1.75-2-2.5-3-3.5-4-4.5-5-5.5-6			
Whitworth 55° - 4 a 62 thread"			
4-4.5-5-6-7-8-9-10-11-12-13-14-16-18-19-20-22-24-25-26-28-30-32-36-40-48-60-62			

FEELER GAUGE SETS



- Blade length: 100 mm


			g
971-13-1	5	13 blades	52
0.05 to 1 mm			
0.05-0.10-0.15-0.20-0.25-0.30-0.40-0.50-0.60-0.70-0.80-0.90-1			
971-20-1	5	20 blades	83
0.05 to 1 mm			
0.05-0.10-0.15-0.20-0.25-0.30-0.35-0.40-0.45-0.50-0.55-0.60-0.65-0.70-0.75-0.80-0.85-0.90-0.95-1			

CALIPERS

VERNIER CALIPER 150 MM




- Vernier caliper
- Accuracy ± 0.03 mm
- Made in hardened stainless steel
- Includes thread chart
- Includes plastic box for safe storage



DIGITAL VERNIER CALIPER 150 MM




- Digital Vernier caliper
- Accuracy ± 0.03 mm
- Made in hardened stainless steel
- Includes thread chart
- Includes plastic box for safe storage



INFRARED THERMOMETER




- Non contact measuring temperature
- Measuring range: -50°C to 420°C (-58°F to 788°F)
- With laser pointer
- Accuracy: 0 to 420°C , $\pm 1.5^{\circ}$
 -50 to 0°C , $\pm 3^{\circ}$
- Resolution: 0.1°C
- Repeatability: 1% of reading or 1°C
- Response time: 500 ms
- Measuring cone ratio: L12 to D1
- 9V battery not included



PAINT SCRAPERS

PAINT SCRAPERS

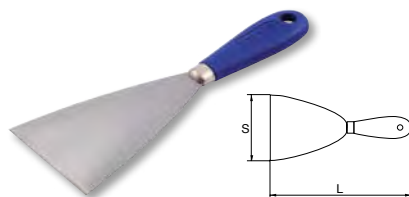

- Flexible carbon steel ground blade
- 1.5 mm thickness/0.5 mm at the tip
- Excellent flexibility and maximum durability
- Polished and varnished blade for longer life
- Metallic ring for perfect fixing between handle and blade
- Comfortable and light plastic handle
- Provided with hanging hole
- Standards: DIN 7216, UNE 16608

R		S mm	L mm	g
540021	12	20	220	50
540031	12	30	220	55
540041	12	40	220	60
540051	12	50	220	65
540061	12	60	220	70
540071	12	70	220	75
540081	12	80	220	80
540091	12	90	220	85
540101	12	100	220	90
540121	12	120	220	100

BODY WORK SCRAPER SET





- Bodywork scraper set, 4 pcs
- Carbon steel ground blade
- Excellent flexibility and maximum durability
- Polished and varnished blade to prevent oxidation
- Supplied in a plastic pouch

R		X	mm	g
536011	1	4	160x130	120
			90x50 mm, 120x80 mm, 120x105 mm, 120x120 mm	

FASTENING TOOLS

CAULKING GUNS

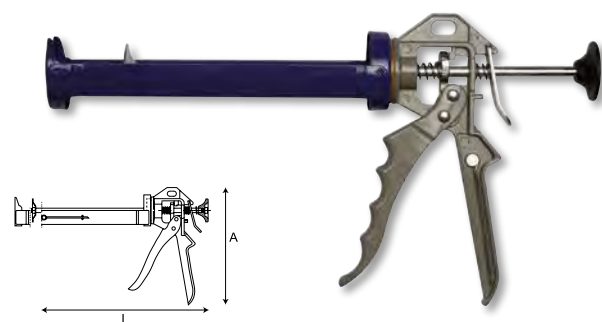

- Caulking gun for 9" cartridges
- Suitable for most grades of resins and glues
- Handle and trigger made of high quality aluminium
- Rotary skeleton for easy loading
- Needle incorporated for cleaning
- Thrust ratio 7:1
- Maximum push force 1500N

R		A mm	L mm	g
549-230-2	1	200	330	550

ELECTRONIC GLUE GUN SET



- Industrial performance glue gun
- With ON-OFF switch for energy saving
- CE/GS Standards
- Protected nozzle for added safety, reliability and extended life
- 2 additional nozzles (spreader & precision) with a valve to prevent unintentional glue drop
- Foldable stand for safe, handy storage while in use
- Power: 80W. Voltage: 220-240V. Preheat time: 3-5 minutes.
- Flow of glue: 14-15 g per minute. 1,6 m cord
- 12 pcs of 11.2x150 mm glue stick (6 x General Purpose glue sticks, 6 x Super Strength glue sticks)
- Blister pack

R		mm	g
550-80-4	1	40x190x190	250

HEAT GUN 2000W



- Adjustable temperature heat gun 2000W
- Led display for temperature adjustment
- 12 temperature setting values
- 2 different airflow option:
 - Speed 1: 250 l/min - 50°C, 100°C, 150°C, 200°C, 250°C, 350°C
 - Speed 2: 550 l/min - 100°C, 200°C, 300°C, 400°C, 500°C, 600°C
- Auto cool-down system: 280 l/min - 50°C
- Hands-free mode

551-HG-1	1	200x65x240	560

HEAVY DUTY STAPLE GUN 4 IN 1



- Promotional kit with stapler remover including a box with 1000 staples
- Compact, multi-purpose stapler and brad nail staple gun
- High-low power setting to control intensity application
- Fastener window provides clear visibility to determine when staple reload is required
- Anti-jam mechanism for continuous use and reliable operation
- Lock down handle for safe storage and transportation
- Belt clip

560-41LP-1	3	170x290x40	690

HEAT GUN NOZZLES



- 4x heat gun nozzles
- Four different nozzles, one for each kind of work
- Compatible with 551-HG-1 2000W heat gun

551-NOZ-1	1	4	5x110x150	10

HAMMER TACKER



- Promotional kit with a box with 1000 staples
- Compact hammer tacker with steel housing
- Anti-jam mechanism for continuous use and reliable operation
- Ergonomic handle for better grip and handling

560-HTS-1	6	115x350x32	520

FASTENING TOOLS

HEAVY DUTY STAPLE GUN 4 IN 1



- Compact, multi-purpose stapler and brad nail stapler gun
- High-low power setting to control intensity application
- Fastener window provides clear visibility to determine when staple reload is required
- Anti-jam mechanism for continuous use and reliable operation
- Lock down handle for safe storage and transportation
- Belt clip
- Compatible with:
 - Heavy duty staples (1.2): 6-14 mm (1/4"-9/16")
 - Light duty staples (0.7): 6-14 mm (1/4"-9/16")
 - Cable staples: 10-14 mm (3/8"-9/16")
 - 18 ga. brad nails: 15 mm (19/32")

IRIMO	3	170x290x40	690
560-41-1			

HAMMER TACKER



- Compact hammer tacker with steel housing
- Anti-jam mechanism for continuous use and reliable operation
- Ergonomic handle for better grip and handling

IRIMO	6	115x350x32	520
560-HT-1			

HEAVY DUTY STAPLES

x 1000



- For heavy duty stapling jobs such as insulation, carpets or roofing felt
- Staples suitable for fabrics, cloths, carpets, cardboard, flat wooden slats, wooden cardboard and metal mesh



IRIMO	12	A mm	B mm	C mm	40x28x80	g
560-HD-06		1.2	11.3	6		110
560-HD-08		1.2	11.3	8		137
560-HD-10		1.2	11.3	10		158
560-HD-12		1.2	11.3	12		172
560-HD-14		1.2	11.3	14		195

LIGHT DUTY STAPLES

x 1000



- Suitable staples for light duty household and crafting stapling jobs



IRIMO	12	A mm	B mm	C mm	40x28x80	g
560-LD-06		0.7	11.3	6		70
560-LD-08		0.7	11.3	8		88
560-LD-10		0.7	11.3	10		102
560-LD-12		0.7	11.3	12		112
560-LD-14		0.7	11.3	14		117

BRAD NAILS 15 MM

x 1000



- Suitable brad nails for craft or carpentry projects



IRIMO	12	A mm	B mm	C mm	40x28x80	g
560-BN-15		1.2	2	15		122

CABLE STAPLES


x 1000



- Suitable staples for low voltage wires



IRIMO	12	A mm	B mm	C mm	65x35x80	g
560-CA-10		1.2	7.5	10		127
560-CA-12		1.2	7.5	12		145
560-CA-14		1.2	7.5	14		151

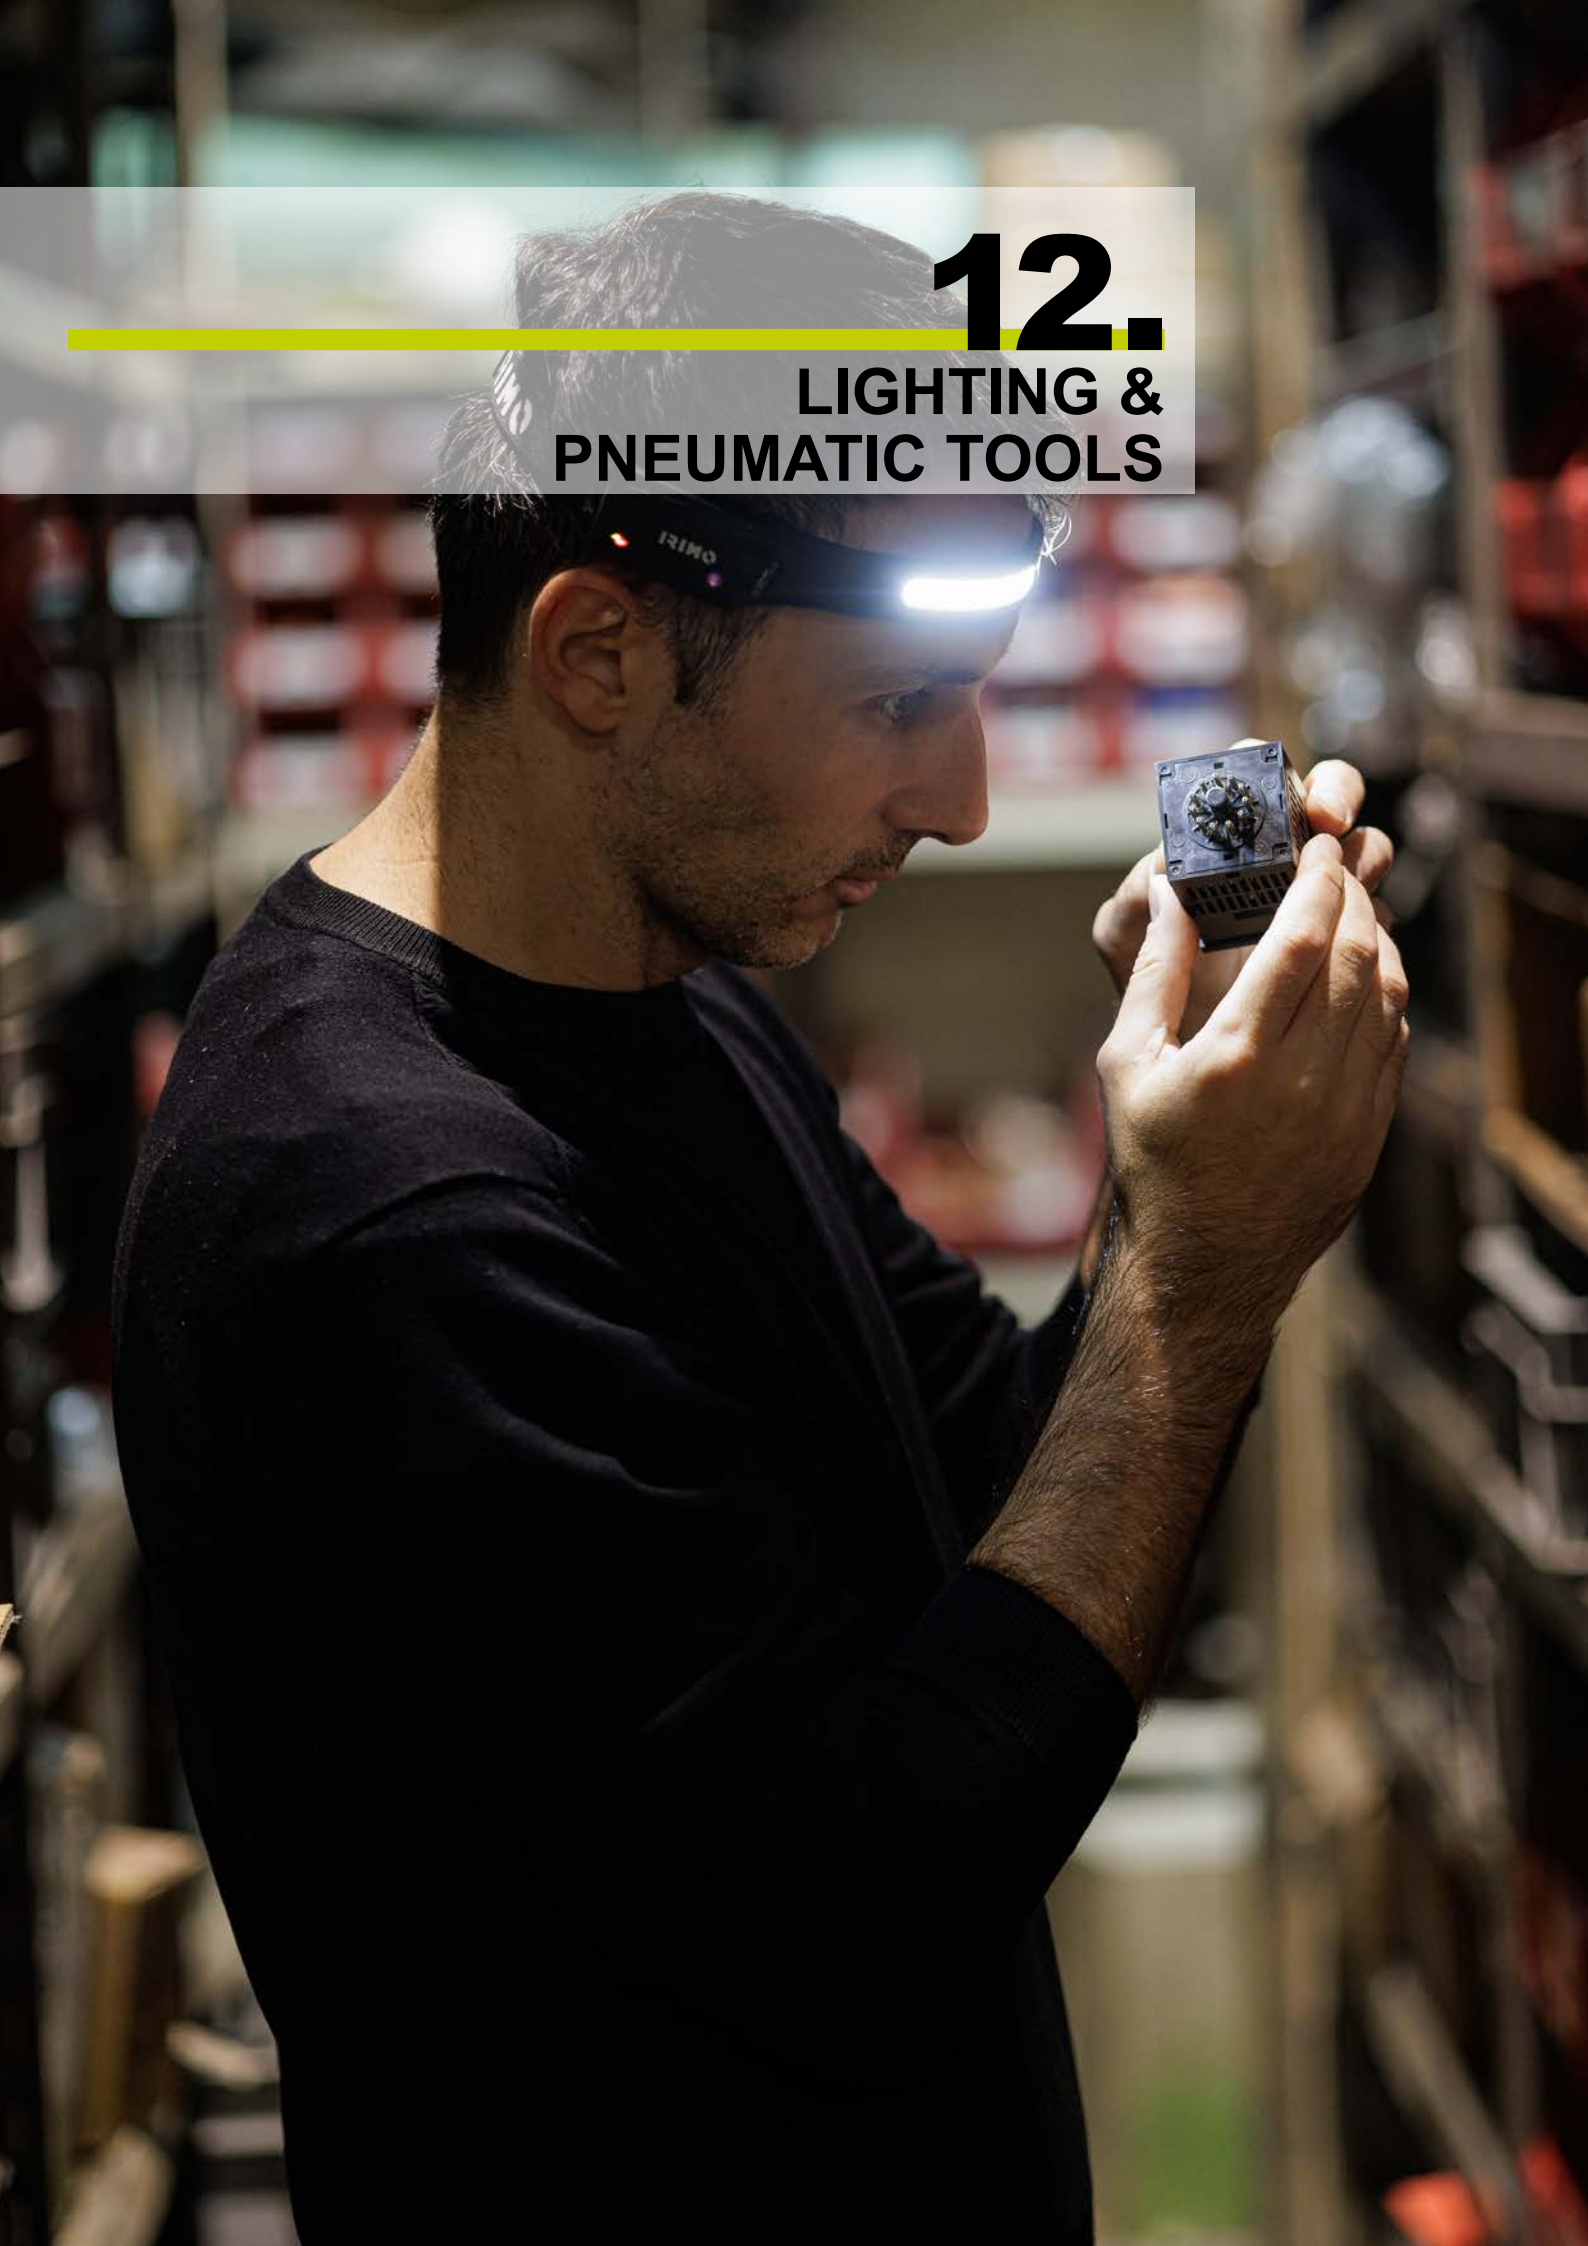A man in a workshop, wearing a black long-sleeved shirt and a headlamp, is focused on examining a small, intricate mechanical component held in his hands. The headlamp is illuminated, casting a bright light on the work area. The background is a blurred workshop environment with shelves and tools.

12.

LIGHTING & PNEUMATIC TOOLS

POCKET LAMPS

FLEXIBLE LIGHT



- LED COB (main) / 1xSMD (torch)
- LUMENS: 400 lm (main) / 70 lm (torch)
- Battery:
 - Material: Li-ion 3.7V 2000 mAh
 - Operating time: 3 h (main) / 10 h (torch)
 - Charging time: 3 h
 - Charging port: Micro USB
- Two light intensity options
- Micro USB cable 1m included
- Temperature: 5700 °K
- CRI: >70
- IP54 / IK07
- CE-EMC / RoHS / Reach

L-FLEX-1	1	400	70	✓	3/10	3.5	74x262x45 307

COMPACT



- LED COB (main) / 1xSMD (torch)
- LUMENS: 600 lm (main) / 100 lm (torch)
- Battery:
 - Material: Li-ion 3.7V 2000 mAh
 - Operating time: 2.5 h (main) 6 h (torch)
 - Charging time: 3 h
 - Charging port: Micro USB
- Micro USB cable 1 m included
- Temperature: 5700 °K
- CRI: >80
- IP54 / IK07
- CE-EMC / RoHS / Reach

L-COMP-1	1	600	100	✓	2.5/6	3	75x207x38 223

SLIM FLEX



- LED COB (main) / 1xSMD (torch)
- LUMENS: 400 lm (main) / 70 lm (torch)
- Battery:
 - Material: Li-ion 3.7V 2000 mAh
 - Operating time: 3-8 h (main) 8 h (torch)
 - Charging time: 3 h
 - Charging port: Micro USB
- Thumbwheel light intensity regulator
- Micro USB cable 1 m included
- Temperature: 5700 °K
- CRI: >70
- IP20 / IK07
- CE-EMC / RoHS / Reach

L-SLIM-1	1	400	70	✓	3/8	3	82x168x36 200

MINI FLEXIBLE LIGHT



- LED SMD 4+1
- LUMENS: 250 lm (main) / 70 lm (torch)
- Battery:
 - Material: Li-ion 3.7V 1000 mAh
 - Operating time: 3 h (main) 7 h (torch)
 - Charging time: 3 h
 - Charging port: Micro USB
- Micro USB cable 1m included
- Temperature: 5700 °K
- CRI: >80
- IP20 / IK07
- CE-EMC / RoHS / Reach

L-MINI-1	1	250	70	✓	3/7	3	53x195x53	130

INSPECTION LAMPS

ALUMINIUM TORCH



- LED COB
- LUMENS: 100 lm
- Battery:
 - 3AAA included
 - Operating time: 9 h
- Aluminium body
- Easy push rubber button
- Strap to hang it
- Temperature: 6500 °K
- CRI: >70
- IP44
- CE-EMC / RoHS

L-ALUM-1*	1	100	3AAA	100x45x35	100

* Until stocks run out

WORKING LAMPS

BOOK LIGHT



- LED 27xSMD
- Two intensity options
- LUMENS: 500 lm / 1000 lm
- Battery:
 - Material: Li-ion 3.7V 4000 mAh
 - Operating time: 6 h / 500 lm, 3 h / 1000 lm
 - Charging time: 2.5-3 h / 5V 2A
 - Charging port: Micro USB
- Power bank functionality
- Rotating handle 270°
- Micro USB cable 1 m included
- Temperature: 6000 °K
- CRI: >80
- IP54 / IK08
- CE-EMC / RoHS / Reach

L-BOOK-1	1	500/1000	3/6	3	182x142x52	400

HEAD LAMPS

HEAD LIGHT



- LED SMD
- LUMENS: 400 lm
- Battery:
 - Material: Li-ion 3.7V 2200mAh
 - Operating time: 5 h
 - Charging time: 4 h
 - Charging port: Micro USB
- Two intensity and blinking option in the front
- Rear red light with blinking option
- Adjustable strap
- Swiveling head
- Zoom for better focus
- Micro USB cable 1 m included
- Temperature: 6000 °K
- CRI: >70
- IP44
- CE-EMC / RoHS / Reach



L-HEAD-1



1



5



4



118x87x64



125

HEAD LIGHT



- LED: COB&PE
- Two settings for intensity and flashing light
- Motion sensor activation mode for contactless On/Off
- Battery:
 - Material: 3.7 V 1200 mAh lithium battery
- Adjustable strap
- USB charging cable included
- IPX4



L-FRONT-1



1



150



x



8



2.5



IPX4



6000



40x60x100



70

1/2" IMPACT WRENCH

P-IW-12



- 1/2" pneumatic impact wrench, 1600 N·m
- Powerful twin hammer mechanism
- Light, durable and insulated composite housing
- Powerful twin hammer mechanism
- Easy one-hand forward and reverse change
- Three-step power regulator
- Progressive trigger mechanism
- Built-in silencer

P-IW-12C



- Compact 1/2" pneumatic impact wrench, 1200 N·m
- Powerful twin hammer mechanism
- Light, durable and insulated composite housing
- Powerful twin hammer mechanism
- Easy one-hand forward and reverse change
- Three-step power regulator
- Progressive trigger mechanism
- Built-in silencer

P-IW-12P



- High performance 1/2" pneumatic impact wrench, 2230 N·m
- Powerful twin hammer mechanism
- Light, durable and insulated composite housing
- Powerful twin hammer mechanism
- Easy one-hand forward and reverse change
- Three-step power regulator
- Progressive trigger mechanism
- Built-in silencer

P-IW-34



- 3/4" pneumatic impact wrench, 2298 N·m
- Powerful twin hammer mechanism
- Light, durable and insulated composite housing
- Powerful twin hammer mechanism
- Easy one-hand forward and reverse change
- Three-step power regulator
- Progressive trigger mechanism
- Built-in silencer



			BAR	inch	mm	mm	N·m	MAX N·m	mm/s	mm/s	mm/s	mm/s	mm	kg
P-IW-12	1	1/2"	6.3	1/4" - 19	10	184	680-730	1600	8.500	1.000	110	6.34	185	2.1
P-IW-12C	1	1/2"	6.3	1/4" - 19	10	184	500-580	1200	10.500	1.250	110	6.34	125	1.25
P-IW-12P	1	1/2"	6.3	1/4" - 19	10	184	1050-1150	2230	7.500	1.000	110	6.34	195	2.3
P-IW-34	1	3/4"	6.3	1/4" - 19	10	184	1080-1150	2298	7.500	1.000	110	6.34	195	2.37

1/4" RATCHET

P700



5-68



1/2" RATCHET

P821



• Composite

			BAR	 inch	 mm		 Nm	 MAX Nm	 dBm	 mm	 mm	 kg
P700	1	1/4"	6.3	1/4" - 18	10	136	0 - 27	300	94.00	3.60	133	0.50
P821	1	1/2"	6.3	1/4" - 18	10	120	0 - 67	150	80.00	2.60	256	1.20

AIR LINE COUPLERS

PM5002
PM5003PM5012
PM5013PM5142
PM5143PM5152
PM5153

PM5248

		inch	mm	g
PM5002 PM5003	1	1/4" 3/8"	Male Male	70
PM5012 PM5013	1	1/4" 3/8"	Female Female	80
PM5142 PM5143	1	1/4" 3/8"	Male Male	20
PM5152 PM5153	1	1/4" 3/8"	Female Female	20
PM5248	1	—	For 8 mm hose	10

CORDLESS SCREWDRIVER

3.6V CORDLESS SCREWDRIVER




- 3.6V Li-ion rechargeable battery
- 1/4" hex quick release bit holder
- 6+1 torque positions
- LED light to lighten the working area
- 4 LED lamp to work as a regular torch
- Adaptable handle in straight or pistol shapes
- One hand forward/reverse change
- Integrated colour LEDs to know the battery status
- 4 screwdriver bits included
- Packed in a retail color cardboard box



		V	mm	RPM	g
3.6SDR	1	3.6	95x65x35	200	400

POINT OF SALE MATERIAL

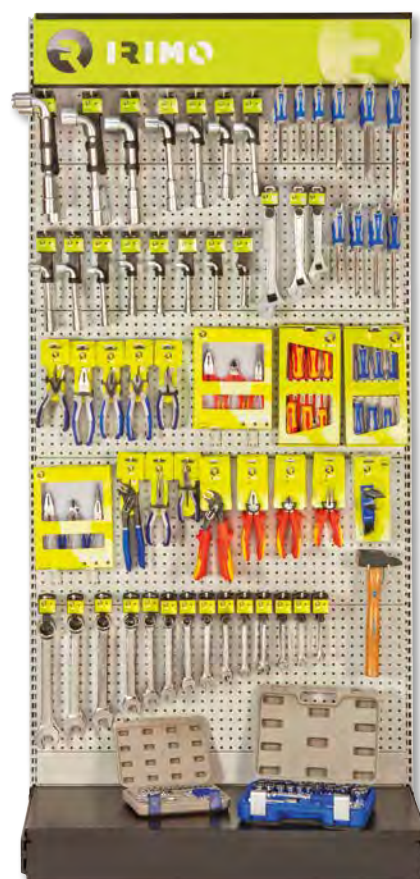

* Tools not included



MEE-SIGN-CARR-I SIGN CARRIER+SIGN IRIMO (100 cm)

MEE-1S2L-B-I METAL WALL_1SIDE_2LEG_BAHC&IRI

The IRIMO exhibitors are a perfect solution that contributes to improving the point of sale management.


With their attractive design, these displays will help enhance the image of the store.

This solution facilitates stock control and at the same time, optimize display space.

NOTE: Below are some examples; for more information about different accessories and sizes, please contact us and we will offer the ideal solution suited to your needs.

POINT OF SALE MATERIAL

METAL WALL 1 SIDE 2 LEGS



	W mm	H mm	L mm	kg
MEE-1S2L-B-I	524	2250	1030	53.63

LIGHTBOX



- Short cable is included
- Order long cable separately (PEE-LCABLE-B-I)


	W mm	H mm	L mm	kg
MEE-LIGHTBOX-I	412	170	1000	13.32

SIGN CARRIER + SIGN IRIMO



	W mm	H mm	L mm	kg
MEE-SIGN-CARR-I	90	200	1000	1.98

METAL WALL CORNER 1 LEG



	W mm	H mm	L mm	kg
MEE-COR-1L-B-I	388	2350	941	44.05

LIGHTBOX CORNER WALL



- Short cable is included
- Order long cable separately (PEE-LCABLE-B-I)

	W mm	H mm	L mm	kg
MEE-COR-LIGHT-I	400	174	910	7.375

POINT OF SALE MATERIAL

SPARE PARTS FOR METAL WALL

METHACRYLATE FOR LIGHTBOX



	W mm	H mm	L mm	kg
PEE-METHACRYL-I	3	168	980	0.61

PVC TOP SIGN FOR SIGN CARRIER




	W mm	H mm	L mm	kg
PEE-SIGN-DB-W-2	3	150	980	0.2

TOP SIGN FOR DOUBLE SIDED WALL



	W mm	H mm	L mm	kg
PEE-TOPSIGN-I	3	150	980	0.2

DOUBLE SIDE WALL WITH WHEELS





	W mm	H mm	L mm	kg
MEE-DB-W-NL	300	800	1390	29.99

BANNER FOR METAL WALLS



	W mm	H mm	L mm	kg
MEE-BANNER-I	15	1200	230	1.025

TRIANGULAR METAL WALL WITH WHEELS

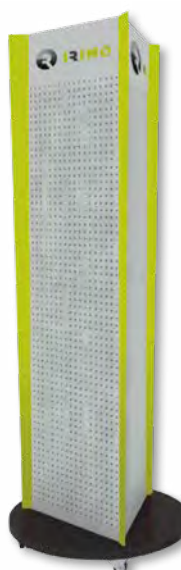

	W mm	H mm	L mm	kg
MEE-TR-W-I	700	1860	700	23.45

ADDITIONAL POS MATERIAL. EMPTY DISPLAYS

GENERIC COUNTER DISPLAY



	W mm	H mm	L mm	kg
MEE-COUNT-IR-1	295	615	430	6.7

COUNTER S DISPLAY



- The display includes 12 hooks of 240 mm length each one

	W mm	H mm	L mm	kg
MEE-COUNT-IR-2	260	465	465	2.6

COUNTER L DISPLAY



- The display includes 22 hooks of 240 mm length each one

	W mm	H mm	L mm	kg
MEE-COUNT-IR-3	270	465	775	4.12

PALLET COVER EUROPALLET



	W mm	H mm	L mm	kg
PEE-PC-IR-1	1150	250	800	0.735

COUNTER DISPLAY PLIERS, 20 pieces



	W mm	H mm	L mm	kg
PEE-COUNT-006	280	240	365	0.23

COUNTER DISPLAY PLIERS, 5 pieces



	W mm	H mm	L mm	kg
CEE-COUNT-IR-1	200	60	90	0.237

STICKERS A4 SHEET



	W mm	L mm	kg
PPOS-A4-STICK-1	210	295	0.018

STAND ALONE



- Material: metal and plastic
- Color: black and green
- The display can be used to expose 3 different socket sets: small - medium - big
- The following socket sets can be exposed:
 - Small socket set (109-35-4)
 - Medium socket set (119-18-4 or 129-23-4)
 - Big socket set (129-58-4 or 129-101-4)
- Includes 3 wall racks with a methacrylate cover
- Delivered already mounted & empty

MEE-SA-SS-IR	1	1835 x 455 x 380	



	
001021	39
001031	39
001041	39
001051	39
001061	39
001071	39
001081	39
020011	46
020031	46
020051	46
020071	46
020091	46
020121	46
020141	46
020171	46
020181	46
020201	46
020211	46
020221	46
020241	46
020251	46
021221	46
021251	46
040001	117
040011	117
040021	117
040031	117
040041	117
040051	117
040061	117
040071	117
040081	117
040091	117
040101	117
040121	117
040141	117
040171	117
040191	117
040221	117
040541	117
040561	117
040581	117
040601	117
040611	117
040621	117
040641	117
040661	117
040681	117
040701	117
040731	117
041011	117
041021	117
041031	117
041041	117
041051	117
041061	117

	
041071	117
041091	117
041101	117
045001	118
045011	118 - 120
045021	118
045031	118
045041	118 - 120
045051	118
045061	118
045071	118
045081	118
045091	118
045101	118
045121	118
045141	118
045171	118
045191	118 - 120
045221	118
045541	120
045561	120
045581	120
045601	120
045611	120
045621	120
045641	120
045661	120
045681	120
045701	120
045731	120
045801	120
045811	120
045821	120
045831	120
045841	120
045851	120
045861	120
045871	120
045881	120
045891	120
045901	120
045921	120
045941	120
046011	119
046021	119
046031	119
046041	120
046051	120
046061	120
046091	119
046101	119
047001	121
047011	121
047021	121
047031	121
047041	121

	
047051	121
047061	121
047081	121
047101	121
047121	121
055011	49
055031	49
055051	49
055071	49
055091	49
055121	49
055141	49
055171	49
055181	49
055201	49
055211	49
055221	49
055241	49
055251	49
055301	49
055311	49
056231	49
056271	49
066-400-1	173
070411	54
070421	54
070431	54
070441	54
070451	54
070461	54
070471	54
070481	54
10-0405-1	40
10-0607-1	40
10-0809-1	40
10-1011-1	40
10-1013-1	40
10-12-H	41
10-12-W	41
10-1213-1	40
10-1415-1	40
10-1617-1	40
10-1719-1	40
10-1819-1	40
10-2022-1	40
10-2123-1	40
10-2224-1	40
10-2426-1	40
10-2427-1	40
10-2528-1	40
10-2729-1	40
10-3032-1	40
10-8-H	41
101-04-1	58
101-045-1	58
101-05-1	58



					
101-055-1	58	106-06-1	58	113-09-1	65
101-06-1	58	106-07-1	58	113-10-1	65
101-07-1	58	106-08-1	58	113-11-1	65
101-08-1	58	106-10-1	58	113-12-1	65
101-09-1	58	107-0840-1	59	113-13-1	65
101-10-1	58	107-1055-1	59	113-14-1	65
101-11-1	58	107-1280-1	59	113-16-1	65
101-12-1	58	107-H3-1	59	113-17-1	65
101-13-1	58	107-H4-1	59	113-19-1	65
101-14-1	58	107-H5-1	59	115-20-1	66
101A-05-1	58	107-H6-1	59	115-22-1	66
101A-06-1	58	107-H8-1	59	115-24-1	66
101A-07-1	58	107-PH1-1	59	115-40-1	66
101A-08-1	58	107-PH2-1	59	115-42-1	66
101A-09-1	58	107-PH3-1	59	115-43-1	66
101A-10-1	58	107-PZ1-1	59	115-44-1	67
101A-11-1	58	107-PZ2-1	59	115-46-1	66
101A-12-1	58	107-PZ3-1	59	115-48-1	67
101A-14-1	58	107-T08-1	59	115-70-1	65
101A-16-1	58	107-T09-1	59	115501	65
101A-18-1	58	107-T10-1	59	119-18-4	67
103-04-1	58	107-T15-1	59	121-08-1	68
103-045-1	58	107-T20-1	59	121-09-1	68
103-05-1	58	107-T25-1	59	121-10-1	68
103-055-1	58	107-T27-1	59	121-11-1	68
103-06-1	58	107-T30-1	59	121-12-1	68
103-07-1	58	107-T40-1	59	121-13-1	68
103-08-1	58	107A-4-1	59	121-14-1	68
103-09-1	58	107A-5-1	59	121-15-1	68
103-10-1	58	107A-6-1	59	121-16-1	68
103-11-1	58	107A-7-1	59	121-17-1	68
103-12-1	58	109-11-4	61	121-18-1	68
103-13-1	58	109-13-4	61	121-19-1	68
103-14-1	58	109-19-4	63	121-20-1	68
103A-06-1	58	109-23-4	63	121-21-1	68
103A-08-1	58	109-35-4	64	121-22-1	68
103A-09-1	58	109-37-4	63	121-23-1	68
103A-10-1	58	112-06-1	64	121-24-1	68
103A-11-1	58	112-07-1	64	121-25-1	68
103A-12-1	58	112-08-1	64	121-26-1	68
103A-14-1	58	112-09-1	64	121-27-1	68
103A-16-1	58	112-10-1	64	121-28-1	68
105-22-1	62	112-11-1	64	121-30-1	68
105-24-1	62	112-12-1	64	121-32-1	68
105-26-1	62	112-13-1	64	121-34-1	68
105-28-1	61	112-14-1	64	121-36-1	68
105-40-1	62	112-15-1	64	122-08-1	68
105-42-1	61	112-16-1	64	122-09-1	68
105-46-1	62	112-17-1	64	122-10-1	68
105-48-1	62	112-18-1	64	122-11-1	68
105-50-1	62	112-19-1	64	122-12-1	68
105-70-1	60	112-20-1	64	122-13-1	68
105-70-12DISP	61	112-21-1	64	122-14-1	68
105501	60	112-22-1	64	122-15-1	68
106-04-1	58	113-07-1	65	122-16-1	68
106-05-1	58	113-08-1	65	122-17-1	68



	
122-18-1	68
122-19-1	68
122-20-1	68
122-21-1	68
122-22-1	68
122-23-1	68
122-24-1	68
122-27-1	68
122-30-1	68
122-32-1	68
122-34-1	68
122-36-1	68
122A-10-1	68
122A-11-1	68
122A-12-1	68
122A-14-1	68
122A-16-1	68
122A-18-1	68
122A-20-1	68
122A-22-1	68
122A-24-1	68
122A-26-1	68
122A-28-1	68
122A-30-1	68
122A-34-1	68
122A-38-1	68
122A-40-1	68
123-10-1	69
123-12-1	69
123-13-1	69
123-14-1	69
123-15-1	69
123-16-1	69
123-17-1	69
123-18-1	69
123-19-1	69
123-21-1	69
123-22-1	69
123-24-1	69
124-10-1	69
124-11-1	69
124-12-1	69
124-13-1	69
124-14-1	69
124-15-1	69
124-16-1	69
124-17-1	69
124-18-1	69
124-19-1	69
124-21-1	69
124-22-1	69
124-24-1	69
124-27-1	69
124-30-1	69
124-32-1	69
124A-18-1	69

	
124A-20-1	69
124A-22-1	69
124A-24-1	69
124A-26-1	69
125-22-1	72
125-23-1	72
125-25-1	72
125-40-1	73
125-42-1	73
125-43-1	73
125-44-1	73
125-46-1	73
125-48-1	73
125-49-1	72
125-52-1	72
125-53-1	73
125-54-1	73
125-60-1	73
125-70-1	71
125-70-12DISP	72
125501	71
126-10-1	69
126-11-1	69
126-12-1	69
126-14-1	69
126-16-1	69
126-18-1	69
126-20-1	69
126-24-1	69
129-10-4	72
129-101-4	77
129-108-4	76
129-12-4	72
129-172-4	77
129-23-4	74
129-33W-4	74
129-58-4	75
129-9H-4	70
129-9T-4	70
129A-103-4	76
129A-53-4	75
131-19-1	79
131-21-1	79
131-22-1	79
131-23-1	79
131-24-1	79
131-25-1	79
131-26-1	79
131-27-1	79
131-28-1	79
131-29-1	79
131-30-1	79
131-32-1	79
131-33-1	79
131-34-1	79
131-35-1	79

	
131-36-1	79
131-38-1	79
131-40-1	79
131-41-1	79
131-42-1	79
131-46-1	79
131-50-1	79
131-55-1	79
131-60-1	79
131B-19-2	79
131B-21-2	79
131B-22-2	79
131B-23-2	79
131B-24-2	79
131B-26-2	79
131B-27-2	79
131B-29-2	79
131B-30-2	79
131B-32-2	79
131B-35-2	79
131B-36-2	79
131B-38-2	79
131B-41-2	79
131B-46-2	79
131B-50-2	79
132A-28-1	79
132A-30-1	79
132A-32-1	79
132A-34-1	79
132A-36-1	79
132A-40-1	79
132A-42-1	79
132A-44-1	79
132A-46-1	79
132A-48-1	79
132A-52-1	79
132A-54-1	79
132A-60-1	79
132A-64-1	79
135-21-1	80
135-22-1	80
135-24-1	80
135-40-1	80
135-42-1	80
135-43-1	80
135-46-1	80
135-52-1	80
135-70-1	80
135-85-1	80
139-17-4	81
139-21-4	81
139-21B-4	81
1467-A01	164
149-164-4	78
15-0607-1	47
15-0809-1	47



					
15-1011-1	47	167-21-1	84	173-46-2	87
15-12-W	47	167-22-1	84	173-50-2	87
15-1213-1	47	167-23-1	84	173-55-2	87
15-1415-1	47	167-24-1	84	173-60-2	87
15-1617-1	47	167-26-1	84	174-17-2	87
15-1719-1	47	167-27-1	84	174-19-2	87
15-1819-1	47	167-30-1	84	174-21-2	87
15-2022-1	47	167-32-1	84	174-22-2	87
15-2123-1	47	167-34-1	84	174-24-2	87
15-2426-1	47	167-36-1	84	174-27-2	87
15-2427-1	47	167-38-1	84	174-30-2	87
15-2528-1	47	167-41-1	84	174-32-2	87
15-2729-1	47	167-9-4	85	174-33-2	87
15-3032-1	47	168-10-1	84	174-34-2	87
15-3236-2	47	168-11-1	84	174-36-2	87
15-3641-2	47	168-13-1	84	174-41-2	87
15-8-H	47	168-14-1	84	175-01-2	88
15-8-W	47	168-14-4	85	175-02-2	88
160-07-1	82	168-16-1	84	175-10-2	88
160-08-1	82	168-17-1	84	175-25-2	88
160-10-1	82	168-18-1	84	175-60-2	88
160-11-1	82	168-19-1	84	175-65-2	88
160-12-1	82	168-21-1	84	175911	88
160-13-1	82	168-22-1	84	177-10-5	89
160-14-1	82	168-23-1	84	177-22-2	89
160-15-1	82	168-24-1	84	177-24-2	89
160-16-1	82	168-27-1	84	177-27-2	89
160-17-1	82	168-30-1	84	177-30-2	89
160-18-1	82	168-32-1	84	177-32-2	89
160-19-1	82	168-7-4	84	177-33-2	89
160-20-1	82	169-01-1	86	177-34-2	89
160-21-1	82	169-02-1	86	177-36-2	89
160-24-1	82	169-03-1	86	177-38-2	89
161-10-1	82	169-25-1	86	177-41-2	89
161-13-1	82	169-60-1	86	177-42-2	89
161-17-1	82	169-65-1	86	177-46-2	89
162-00-1	83	169921	86	177-50-2	89
162-02-1	83	169931	86	177-55-2	89
162-50-1	83	173-01-5	87	177-60-2	89
162-60-1	83	173-17-2	87	177-65-2	89
162-65-1	83	173-18-2	87	177-70-2	89
162931	83	173-19-2	87	177-75-2	89
162941	83	173-21-2	87	177-80-2	89
167-08-1	84	173-22-2	87	178-22-2	89
167-10-1	84	173-23-2	87	178-24-2	89
167-10-4	85	173-24-2	87	178-27-2	89
167-11-4	85	173-27-2	87	178-30-2	89
167-12-1	84	173-28-2	87	178-32-2	89
167-13-1	84	173-29-2	87	178-33-2	89
167-14-1	84	173-30-2	87	178-34-2	89
167-15-1	84	173-32-2	87	178-36-2	89
167-16-1	84	173-33-2	87	178-38-2	89
167-17-1	84	173-34-2	87	178-41-2	89
167-18-1	84	173-36-2	87	178-46-2	89
167-19-1	84	173-38-2	87	178-50-2	89
167-20-1	84	173-41-2	87	178-55-2	89



	
178-60-2	89
179-00-2	90
179-01-2	90
179-02-2	90
179-52-2	90
179-65-2	90
179931	88 - 90
179941	90
18-06-1	44
18-07-1	44
18-08-1	44
18-09-1	44
18-10-1	44
18-11-1	44
18-12-1	44
18-12-H	44
18-13-1	44
18-14-1	44
18-15-1	44
18-16-1	44
18-17-1	44
18-18-1	44
18-19-1	44
18-21-1	44
18-22-1	44
18-24-1	44
18-27-1	44
18-30-1	44
18-32-1	44
18-8-H	44
180-04-1	70
180-05-1	70
180-05X-1	70
180-06-1	70
180-06X-1	70
180-07-1	70
180-07X-1	70
180-08-1	70
180-08X-1	70
180-10-1	70
180-10X-1	70
180-12-1	70
180-12X-1	70
180-14-1	70
180-17-1	70
180-19-1	70
183-20-1	70
183-25-1	70
183-27-1	70
183-30-1	70
183-40-1	70
183-40X-1	70
183-45-1	70
183-45X-1	70
183-50-1	70
183-50X-1	70

	
183-55-1	70
183-55X-1	70
183-60-1	70
185-05-1	71
185-06-1	71
185-06X-1	71
185-08-1	71
185-08X-1	71
185-10-1	71
185-10X-1	71
185-12-1	71
185-12X-1	71
185-14-1	71
185-16-1	71
18D-5-H	45
18S-08-1	45
18S-10-1	45
18S-13-1	45
18S-17-1	45
18S-19-1	45
18S-5-H	45
19-08-1	45
19-10-1	45
19-11-1	45
19-12-1	45
19-12-H	46
19-13-1	45
19-14-1	45
19-17-1	45
19-19-1	45
19-8-H	46
190-6-135	109
190-7-135	109
190-8-135	109
191-10-175	114
191-12-175	114
191-13-175	114
191-6-150	114
191-7-175	114
191-8-175	114
201231	92
201241	92
201251	92
201261	92
201431	95
201451	95
201461	95
201471	95
202-100	93
202-125	93
202-150	93
202401	93
202411	93
202421	93
202431	93
202441	93

	
202451	93
202461	93
202511	94
202521	94
202541	94
202561	94
202571	94
202581	94
202661	95
202671	95
202681	95
202761	95
202771	95
202781	95
202811	94
202821	94
202831	94
202841	94
206-100	94
206-125	94
206-150	94
206721	93
206741	93
206761	93
206821	94
206831	94
206841	94
206851	94
207-100	93
207-125	93
207-150	93
207041	92
207051	92
207061	92
207071	92
216041	92
216051	92
216061	92
216071	92
217-50-B	95
25-06-1	42
25-06-2	42
25-07-1	42
25-07-2	42
25-08-1	42
25-08-2	42
25-09-1	42
25-09-2	42
25-10-1	42
25-10-2	42
25-100-2	42
25-11-1	42
25-11-2	42
25-12-1	42
25-12-2	42
25-12-H	43



					
25-12-W	43	254-150-2	97	25A-26-1	43
25-13-1	42	254-300-2	97	25A-26-2	43
25-13-2	42	254-450-2	97	25A-28-1	43
25-14-1	42	254-600-2	97	25A-28-2	43
25-14-2	42	254-900-2	97	25A-30-1	43
25-15-1	42	255011	96	25A-30-2	43
25-15-2	42	255021	96	25A-32-1	43
25-16-1	42	255031	96	25A-32-2	43
25-16-2	42	255041	96	25A-34-1	43
25-17-1	42	255051	96	25A-36-1	43
25-17-2	42	256001	96	25A-40-1	43
25-18-1	42	256011	96	25A-44-1	43
25-18-2	42	256031	96	25A-46-1	43
25-19-1	42	256041	96	25A-48-1	43
25-19-2	42	256131	96	25A-52-1	43
25-20-1	42	256141	96	25A-58-1	43
25-20-2	42	256151	96	25A-64-1	43
25-21-1	42	256161	96	29-3550-2	51
25-21-2	42	256181	96	29-5080-2	51
25-22-1	42	256201	96	29-80120-2	51
25-22-2	42	256231	96	29P-3550-2	51
25-23-1	42	256241	96	29P-3550-A	51
25-23-2	42	256251	96	29P-5080-2	51
25-24-1	42	256261	96	29P-5080-A	51
25-24-2	42	256281	96	29P-80120-2	51
25-25-1	42	256301	96	29P-80120-A	51
25-25-2	42	256321	96	3.6SDR	194
25-26-1	42	257-200-2	97	30-100-2	50
25-26-2	42	257-300-2	97	30-24-2	50
25-27-1	42	257-400-2	97	30-27-2	50
25-27-2	42	257-500-2	97	30-30-2	50
25-28-1	42	257-600-2	97	30-32-2	50
25-28-2	42	258-100-2	96	30-34-2	50
25-29-1	42	258-120-2	96	30-36-2	50
25-29-2	42	258-160-2	96	30-38-2	50
25-30-1	42	258-200-2	96	30-41-2	50
25-30-2	42	258-250-2	96	30-46-2	50
25-32-1	42	258-300-2	96	30-50-2	50
25-32-2	42	25A-08-1	43	30-55-2	50
25-34-1	42	25A-08-2	43	30-60-2	50
25-34-2	42	25A-10-1	43	30-65-2	50
25-36-2	42	25A-10-2	43	30-70-2	50
25-41-2	42	25A-12-1	43	30-75-2	50
25-46-2	42	25A-12-2	43	30-80-2	50
25-50-2	42	25A-14-1	43	30-85-2	50
25-55-2	42	25A-14-2	43	30-90-2	50
25-60-2	42	25A-16-1	43	30-95-2	50
25-65-2	42	25A-16-2	43	302-210-2	100
25-70-2	42	25A-18-1	43	302-260-2	100
25-75-2	42	25A-18-2	43	302-310-2	100
25-8-H	43	25A-20-1	43	302-365-2	100
25-80-2	42	25A-20-2	43	302-465-2	100
25-85-2	42	25A-22-1	43	302-615-2	100
25-90-2	42	25A-22-2	43	302-900-2	100
25-95-2	42	25A-24-1	43	302S-210-2	100
254-1200-2	97	25A-24-2	43	302S-260-2	100



	
302S-310-2	100
302S-365-2	100
302S-465-2	100
302S-615-2	100
302S-900-2	100
302T-210-2	100
302T-260-2	100
302T-310-2	100
302T-365-2	100
302T-465-2	100
302T-615-2	100
302T-900-2	100
303081	101
303111	101
303121	101
303131	101
303171	101
303201	101
303211	101
303221	101
303231	101
303241	101
303291	101
303301	101
303311	101
303321	101
303331	101
304-250-2	100
304-350-2	100
304-450-2	100
304-600-2	100
304-900-2	100
304F-250-2	100
304F-350-2	100
304F-450-2	100
304F-600-2	100
304F-900-2	100
304S-250-2	100
304S-350-2	100
304S-450-2	100
304S-600-2	100
304S-900-2	100
304T-250-2	100
304T-350-2	100
304T-450-2	100
304T-600-2	100
304T-900-2	100
307-1122-2	101
307-350-2	101
307-685-2	101
307-940-2	101
307S-1122-2	101
307S-350-2	101
307S-685-2	101
307S-940-2	101
31-30-2	50

	
31-32-2	50
31-36-2	50
31-41-2	50
31-46-2	50
31-50-2	50
31-55-2	50
31-60-2	50
31-65-2	50
31-70-2	50
31-75-2	50
31-80-2	50
31-85-2	50
321-42-1	102
321-BLADE-1	102
321161	102
321171	102
321281	102
321361	102
321501	102
321511	102
321551	102
330021	103
332-51-4	103
332-52-4	103
332S-030-2	103
333-003-2	103
333-004-2	103
333-006-2	103
333-008-2	103
333-010-2	103
333-012-2	103
333-014-2	103
333-016-2	103
333-018-2	103
333-020-2	103
333-022-2	103
333-024-2	103
333-026-2	103
333-028-2	103
333-030-2	103
407-10-200	106
407-12-250	106
407-14-250	106
407-4-100	106
407-4-75	106
407-5.5-100	106
407-5.5-125	106
407-6.5-125	106
407-6.5-150	106
407-8-150	106
407-8-175	106
408-2.5-75	106
408-3-100	106
408-3-200	106
408-3-75	106
408-3.5-100	106

	
408-4-100	106
408-4-125	106
408-4-250	106
408-5.5-125	106
408-5.5-150	106
408-5.5-25	107
408-5.5-300	106
408-6.5-150	106
408-6.5-25	107
408V-2.5-100	110
408V-3-100	110
408V-3.5-100	110
408V-4-100	110
408V-5.5-125	110
408V-6.5-150	110
408V-8-175	110
409-0-75	107
409-1-100	107
409-1-25	107
409-1-250	107
409-2-125	107
409-2-25	107
409-2-300	107
409-3-150	107
409-4-200	107
409V-0-100	110
409V-1-150	110
409V-2-175	110
409V-3-200	110
413-0-75	107
413-1-100	107
413-1-25	107
413-2-125	107
413-2-25	107
413-3-150	107
413-4-200	107
413V-0-100	111
413V-1-150	111
413V-2-175	111
413V-3-200	111
414-10-75	108
414-15-100	108
414-20-100	108
414-25-125	108
414-27-125	108
414-30-150	108
414-40-150	108
414-45-150	108
414-5-75	108
414-6-75	108
414-7-75	108
414-8-75	108
414-9-75	108
414V-10-100	111
414V-15-125	111
414V-20-125	111



					
414V-25-150	111	457-15-1	122	470-H4-1	133
417-10-125	108	457-20-1	122	470-H5-1	133
417-11-125	108	457-25-1	122	470-H6-1	133
417-12-125	108	457-27-1	122	470-H7-1	133
417-13-125	108	457-30-1	122	470-H8-1	133
417-14-125	108	457-40-1	122	470-PH1-1	133
417-3.2-125	108	457-45-1	122	470-PH2-1	133
417-4-125	108	457-50-1	122	470-PH3-1	133
417-4.5-125	108	457061	122	470-PH4-1	133
417-5-125	108	457071	122	470-T20-1	133
417-5.5-125	108	457081	122	470-T25-1	133
417-6-125	108	457091	122	470-T27-1	133
417-7-125	108	457101	122	470-T30-1	133
417-8-125	108	457151	122	470-T40-1	133
417-9-125	108	457201	122	470-T45-1	133
42-H10-200	113	457251	122	470-T50-1	133
42-H2-100	113	457271	122	470-T55-1	133
42-H2.5-100	113	457301	122	470011	134
42-H3-100	113	457401	122	470051	134
42-H4-150	113	457451	122	471-18-1	132
42-H5-150	113	457501	122	471011	134
42-H6-200	113	458-02-1	115	474M-1/4-1	129
42-H8-200	113	458-8-F	122	474M-10-1	129
420-3-1	118	458-9-H	122	474M-11-1	129
427411	115	459-5-B	112	474M-12-1	129
428-700-2	143	459-6-C	112	474M-13-1	129
429-03-1	116	459-6A-C	112	474M-3/8-1	129
429-04-1	116	459-6B-C	112	474M-5-H	129
429-10-1	116	459-6C-C	113	474M-5.5-1	129
42B-6-B	114	459V-3-1	111	474M-6-1	129
42B-H10-200	114	459V-6-C	111	474M-7-1	129
42B-H3-100	114	46-8-F	119	474M-8-1	129
42B-H4-150	114	46-9-H	119	474M-9-1	129
42B-H5-150	114	46-T10-100	114	474MR-10-1	129
42B-H6-200	114	46-T15-150	114	474MR-8-1	129
42B-H8-200	114	46-T20-150	114	475-1/4-125	108
45-00-1	119	46-T25-150	114	475-150PH1-1	125
45-01-1	119	46-T30-200	114	475-150PH2-1	125
45-02-1	119	46-T40-200	114	475-150PZ1-1	126
45-03-1	119	461-6-B	116	475-150PZ2-1	126
45-04-1	119	47-00-1	121	475-150T10-1	127
45-05-1	119	47-01-1	121	475-150T15-1	127
45-06-1	119	47-02-1	121	475-150T20-1	127
45-08-1	119	47-03-1	121	475-150T25-1	127
45-10-1	119	47-04-1	121	475-150T30-1	127
454-8-F	123	47-05-1	121	475-150T40-1	127
454-9-H	123	47-06-1	121	475-32-1	131
454091	123	47-08-1	121	475-32-8DISP	131
454101	123	47-10-1	121	475-32A-1	131
454151	123	470-10.0-1	133	475-4-1	124
454201	123	470-12.0-1	133	475-4.5-1	124
454251	123	470-14.0-1	133	475-5-1	115
454271	123	470-5.5-1	133	475-5.5-1	124
454301	123	470-6.5-1	133	475-50PH1-1	124
454401	123	470-8.0-1	133	475-50PH2-1	124
457-10-1	122	470-H10-1	133	475-50PH3-1	124



	
475-50PZ1-1	125
475-50PZ2-1	125
475-50PZ3-1	125
475-50T10-1	126
475-50T15-1	126
475-50T20-1	126
475-50T25-1	126
475-50T30-1	126
475-50T40-1	126
475-50T6-1	126
475-50T8-1	126
475-6.0-1	124
475-6.5-1	124
475-61-1	132
475-70-3.0-1	124
475-70-3.5-1	124
475-70-5.5-1	124
475-70-6.5-1	124
475-70PH1-1	124
475-70PH2-1	124
475-70PH3-1	124
475-70PZ1-1	126
475-70PZ2-1	126
475-70PZ3-1	126
475-8.0-1	124
475-89PH1-1	125
475-89PH2-1	125
475-89PH3-1	125
475-89PZ1-1	126
475-89PZ2-1	126
475-89PZ3-1	126
475-89T10-1	127
475-89T15-1	127
475-89T20-1	127
475-89T25-1	127
475-89T27-1	127
475-89T30-1	127
475-89T40-1	127
475-9-1	132
475-H3-1	127
475-H4-1	127
475-H5-1	127
475-H6-1	127
475-PH0-1	124
475-PH1-1	124
475-PH2-1	124
475-PH2G-1	125
475-PH3-1	124
475-PZ0-1	125
475-PZ1-1	125
475-PZ2-1	125
475-PZ3-1	125
475-T10-1	126
475-T15-1	126
475-T20-1	126
475-T25-1	126

	
475-T27-1	126
475-T30-1	126
475-T40-1	126
475-T45-1	126
475-T5-1	126
475-T50-1	126
475-T6-1	126
475-T7-1	126
475-T8-1	126
475-T9-1	126
475-TR10-1	127
475-TR15-1	127
475-TR20-1	127
475-TR25-1	127
475-TR27-1	127
475-TR30-1	127
475-TR40-1	127
475A-25-1	130
475A-50-1	130
475A-50-1/2-1	130
475A-60QR-1	130
475A-75QR-1	130
475A-M-150-1	130
475A-M-50-1	130
475A-M-75-1	130
475D-PH1-1	128
475D-PH2-1	128
475D-PH3-1	128
475D-PZ1-1	128
475D-PZ2-1	128
475D-PZ3-1	128
475R-1/4-110	109
475R-1/4-30	109
475T-PH1-1	128
475T-PH2-2	128
475T-PH3-2	128
475T-PZ1-1	128
475T-PZ2-2	128
475T-PZ3-2	128
478-4-1	116
478-4-2	116
48-9-H	121
48-9C-H	118
48A-13-H	121
495F-500-2	146
495F-600-2	146
5-100-1	39
5-100-2	39
5-100C-1	39
5-150-1	39
5-150-2	39
5-150C-1	39
5-200-1	39
5-200-2	39
5-200C-1	39
5-250-1	39

	
5-250-2	39
5-250C-1	39
5-300-1	39
5-300-2	39
5-300C-1	39
5-375-2	39
5-375C-2	39
5-4-W	40
5-450-2	39
5-450C-2	39
500-240-1	138
501-150-1	138
501-200-1	138
501-250-1	138
501-300-1	138
502-230-1	138
503-200-1	141
503-250-1	141
503-300-1	141
504-150-1	138
504-175-1	138
504-200-1	138
504-250-1	138
504-300-1	138
506-150-1	138
506-175-1	138
506-200-1	138
51-06-1	48
51-07-1	48
51-08-1	48
51-09-1	48
51-10-1	48
51-11-1	48
51-12-1	48
51-13-1	48
51-14-1	48
51-15-1	48
51-16-1	48
51-17-1	48
51-18-1	48
51-19-1	48
51-20-1	48
51-21-1	48
51-22-1	48
51-23-1	48
51-24-1	48
51-25-1	48
51-26-1	48
51-27-1	48
51-28-1	48
51-29-1	48
51-30-1	48
51-32-1	48
51-8-W	48
511-100-1	139
511-105-1	139



					
511-110-1	139	52-17-1	48	526-62-2	145
511-115-1	139	52-18-1	48	526-71-2	145
511-130-1	139	52-19-1	48	526-72-2	145
511-91-4	139	52-20-1	48	526-91-2	145
511-92-4	139	52-21-1	48	526-92-2	145
511501	142	52-22-1	48	527-31-2	145
513-002-1	139	52-23-1	48	527-32-2	145
513-003-1	139	52-24-1	48	527-33-2	145
513-004-1	139	52-25-1	48	527-41-2	145
513-005-1	139	52-26-1	48	527-43-2	145
513-006-1	139	52-27-1	48	527-51-2	145
513-008-1	139	52-28-1	48	527-52-2	145
513-010-1	139	52-29-1	48	527-53-2	145
513-91-4	140	52-30-1	48	527-61-2	145
514-002-1	139	52-32-1	48	527-63-2	145
514-003-1	139	52-8-W	48	527-71-2	145
514-004-1	139	520-13S-1	143	527-73-2	145
514-005-1	139	520-41-2	143	527-81-2	145
514-006-1	139	520-42-2	143	527-82-2	145
515-002-1	140	520-43-2	143	527-83-2	145
515-003-1	140	520-61-2	143	527-91-2	145
515-004-1	140	520-63-2	143	527-93-2	145
515-005-1	140	522-21-2	144	529021	147
515-006-1	140	522-22-2	144	529031	147
515-007-1	140	522-23-2	144	529041	147
515-008-1	140	522-31-2	144	529061	147
515-009-1	140	522-32-2	144	529071	147
515-010-1	140	522-33-2	144	529081	147
515-91-4	140	522-41-2	144	529091	147
516-002-1	141	522-42-2	144	529101	147
516-003-1	141	522-43-2	144	529151	147
516-004-1	141	525-11-2	144	529161	147
516-005-1	141	525-12-2	144	529171	147
516-006-1	141	525-21-2	144	529181	147
516-008-1	141	525-22-2	144	529191	147
517-120-1	141	525-31-2	144	529251	146
517-130-1	141	525-32-2	144	529261	146
517-135-1	141	525-41-2	144	529271	146
517-140-1	141	525-42-2	144	529291	146
517-145-1	141	525-43-2	144	529611	147
517-150-1	141	525-61-2	144	529621	147
517-91-4	141	525-62-2	144	529631	147
518-004-1	141	525-71-2	144	529701	147
518-006-1	141	525-72-2	144	529711	147
519-91-4	140	525-81-2	144	529721	147
52-06-1	48	525-82-2	144	529751	147
52-07-1	48	525-91-2	144	529761	147
52-08-1	48	525-92-2	144	529771	147
52-09-1	48	526-31-2	145	529781	147
52-10-1	48	526-32-2	145	529791	147
52-11-1	48	526-41-2	145	529801	147
52-12-1	48	526-42-2	145	529811	147
52-13-1	48	526-51-2	145	529821	147
52-14-1	48	526-52-2	145	530-03-2	146
52-15-1	48	526-53-2	145	530-05-2	146
52-16-1	48	526-61-2	145	530-07-2	146



	
530-13-2	146
530-15-2	146
531-05-2	146
531-07-2	146
531-08-2	146
531-09-2	146
531-15-2	146
531-17-2	146
531-18-2	146
531-19-2	146
534251	178
534261	178
534281	178
534291	178
534311	179
534321	179
534341	179
534351	179
534371	179
534381	179
534401	179
534411	179
534501	179
534521	178
534531	178
534541	178
534551	178
534561	178
534571	178
534601	179
534611	179
534621	179
534681	179
534691	179
534701	179
534901	179
534931	179
534941	179
536011	186
538-140-1	165
540021	186
540031	186
540041	186
540051	186
540061	186
540071	186
540081	186
540091	186
540101	186
540121	186
546-265-1	164
546-265-4	164
546-265-A	164
546-265-B	164
546021	164
546201	164

	
546211	164
546221	164
546251	164
548-275-1	164
548-275-M3	164
548-275-M4	164
548-275-M5	164
548-275-M6	164
549-230-2	186
550-80-4	186
551-HG-1	187
551-NOZ-1	187
560-41-1	188
560-41LP-1	187
560-BN-15	188
560-CA-10	188
560-CA-12	188
560-CA-14	188
560-HD-06	188
560-HD-08	188
560-HD-10	188
560-HD-12	188
560-HD-14	188
560-HT-1	188
560-HTS-1	187
560-LD-06	188
560-LD-08	188
560-LD-10	188
560-LD-12	188
560-LD-14	188
601-160-1	150
601-180-1	150
601-200-1	150
601-3-C	152
601911	160
601M-125-1	153
601V-160-1	156
601V-180-1	156
601V-200-1	156
601V-3-C	158
602-3-C	152
604-160-1	151
604-180-1	151
604M-125-1	153
604V-160-1	156
608-160-1	152
612-160-1	151
612-200-1	151
612M-125-1	153
612V-160-1	157
612V-200-1	157
613-160-1	151
613-200-1	151
613V-160-1	157
613V-200-1	157
621551	160

	
621561	160
621571	160
621581	160
621591	160
621651	160
621661	160
621671	160
621681	160
621691	160
621751	160
621761	160
621771	160
621781	160
621791	160
621851	160
621861	160
621871	160
621881	160
621891	160
624-140-1	151
624-160-1	151
624-180-1	151
624M-125-1	153
624V-140-1	157
624V-160-1	157
625-180-1	151
625-200-1	151
625V-180-1	157
626M-125-1	154
629-160-1	154
629V-160-1	158
630-295T-4	156
630-5HD-4	156
630-61B1-4	155
630-B1-1	155
630-B2-1	155
630-B3 -1	155
631-200-1	159
632-220-1	159
632-250-1	159
632-280-1	159
632D-250-1	159
634-200-1	152
634-250-1	152
634-300-1	152
634Q-250-1	152
634V-250-1	158
645011	163
645021	163
645031	163
645041	163
647-235-1	162
647-250-1	162
648-140-1	163
648-165-1	163
648-185-1	163



					
648-250-1	163	701-250-S	170	7309-125	54
648-4-W	163	701-350-1	170	7309-2-10	54
64A-190-1	161	701-350-B	170	7309-2-11	54
64A-235-1	161	701-90-1	170	7309-2-12	54
64B-190-1	161	701-90-B	170	7309-2-13	54
64B-235-1	161	701-90-K	170	7309-2-14	54
64C-300-1	161	701-90-S	170	7309-2-17	54
64CA-175-1	162	702-40-1	170	7309-2-19	54
64CA-300-1	162	702-40-B	170	7309-3/8	55
64CA-450-1	162	702-40-K	170 - 171	7309-30	54
64CAD-300-1	162	702-40-P	170 - 171	7309-60	54
64L-165-1	161	702-40-S	170 - 171	7314-1-13	55
64T-300-1	162	702-65-1	170	7314-1-14	55
64W-300-1	161	702-65-K	170 - 171	7314-1-17	55
651101	159	702-65-S	170 - 171	7314-1-19	55
651111	159	702-80-1	170	7314-1-22	55
651121	159	702-80-K	170 - 171	7314-1-24	55
651131	159	702-80-S	170 - 171	7314-1-27	55
651141	159	703-40-1	171	7314-1-30	55
651201N	159	703-40-B	171	7314-1-32	55
651201N2	159	703-65-1	171	7314-1/2	55
651211N	159	703-80-1	171	7314-2-13	55
651211N2	159	71-UN7-1	51	7314-2-14	55
651221N	159	71-UN9-1	51	7314-2-17	55
651221N2	159	713001	171	7314-2-19	55
651231N	159	713011	171	7314-2-22	55
651231N2	159	713511	171	7314-2-24	55
651241N	159	713521	171	7314-2-27	55
651241N2	159	713531	171	7314-2-30	55
655D-160-1	154	713541	171	7314-2-32	55
655D-200-1	154	713611	171	7314-2-36	55
661-140-1	167	716-5-1	172	7314-2-41	55
661-140-12-DISP	167	716-8-1	172	7314-200	54
661051	167	716-M11-1	172	7314-335	54
661061	167	716-M14-1	172	740-016-2	174
664-200-1	166	716-M18-1	172	740-020-2	174
665-200-1	166	716-M6-1	172	740-022-2	174
666-156-1	165	716-M8-1	172	740-025-2	174
667-135-1	165	718211	172	740-030-2	174
668-150-1	165	718231	172	740-035-2	174
669-175-1	165	720-1M-413	172	740-040-2	174
669-190-1	166	720-3M-413	172	740-050-2	174
670-178-1	166	720-LM-1	173	740S-008-2	174
671-150-1	166	720031	173	740S-010-2	174
672-220-1	165	722-4-1	167	740S-012-2	174
701-130-1	170	730011	172	740S-014-2	174
701-130-B	170	730131	172	796491	171
701-160-1	170	7309-1-10	54	796501	171
701-160-B	170	7309-1-11	54	796511	171
701-160-K	170	7309-1-12	54	796521	171
701-160-S	170	7309-1-13	54	796531	171
701-200-1	170	7309-1-14	54	796541	171
701-200-B	170	7309-1-17	54	796551	171
701-250-1	170	7309-1-19	54	796561	171
701-250-B	170	7309-1/2	55	796571	171
701-250-K	170	7309-1/4	55	800-111-1	177



	
800-131-1	176
800-141-1	177
800-151-1	176
801-011-1	178
801-041-1	177
801-145-1	178
801101	177
802-2400-1	176
802-2423-1	176
802-2451-1	176
802-3000-1	176
802-3023-1	176
802-3051-1	176
802-3600-1	176
802-3623-1	176
802-3651-1	176
803-318-5	177
803-318-50	177
803-324-5	177
803-324-50	177
803-332-5	177
803-332-50	177
805-3-C	148
806-6-B	148
810-2264-4	178
902021	29
902031	29
902131	29
9021FTW520	18
9021FTW520-AC1	—
9021FTW520-AC2	—
9021FTW520-AC3	—
9021FTW520-AC4	—
9021FTW520-AC5	—
9021FTW520FF1	19
9022-1-16SB	31
9022-1-19HB	31
9022-2-16HB	31
9022-2-19HB	31
9022-3-10	35
9022-3-20	33
9022-3-20TS1	33
9022-3-20TS2	33
9022-3-30	34
9022-3-30TS1	34
9022-3-30TS2	34
9022-3-40	34
9022-3-40TS1	34
9022-3-40TS2	34
9022-3-50	35
9022-3-50TS1	35
9022-4-35	33
9022-4-35TS1	33
9022-BP1	32
9022-BPW	32
9024-1TS1	30

	
9024-1TS145	30
9062-1500-1	27
9062-1800-1	27
9062-CAST-1	27
9062-FIX-1	27
9062-HOOK-1	27
9062-P1500-1	27
9062-P1800-1	27
9062FWB160	28
9063FT90	29
9063HT150	28
9063HT150FI	28
9063HT150SW	28
9063HT300	28
9063HT300FI	28
9063HT300SW	28
9064-15	—
9064AC01	—
9064K-02	18
9064K-02T	18
9065K4	14
9066K-01	14
9066K-02	14
9066K-03	14
9066K-05	14
9066K-06	14
9066K5	14
9066K6	14
9066K6FF100	15
9066K6FF101	16
9066K7	14
9066K7FF102	17
971-13-1	184
971-20-1	184
972-52-1	184
980-20S-1	183
980-3-1	182
980-3B-1	182
980-5-1	182
980-5-25-1	182
980-5B-1	182
980-5W-1	183
980-8B-1	182
980-TP2-1	182
980HV-3-1	182
980HV-5-1	182
981-1000-1	180
981-1200-1	180
981-1500-1	180
981-1800-1	180
981-2000-1	180
981-400-1	180
981-400M-1	180
981-600-1	180
981-600M-1	180
981-800-1	180

	
982-10-1	181
982-40-1	180
982-4M-1	180
982-60-1	180
982-6M-1	180
982-80-1	180
982-SET	181
982-TOR-1	181
983-25-1	181
984-6-1	185
984-6D-1	185
985-2-1	183
991-200-1	184
991-250-1	184
991-300-1	184
991-400-1	184
993-150-1	184
993-300-1	184
993-400-1	184
CEE-COUNT-IR-1	199
IFF1A001	20
IFF1A002	20
IFF1A003	20
IFF1A004	21
IFF1A005	21
IFF1A006	21
IFF1A007	22
IFF1E001	22
IFF1E002	22
IFF1E003	22
IFF1E004	22
IFF1E005	22
IFF1E006	22
IFF1E007	23
IFF1E008	23
IFF1E009	23
IFF1E010	23
IFF1E011	23
IFF1E012	23
IFF1E013	24
IFF1E014	24
IFF1E015	24
IFF1E016	24
IFF1E017	24
IFF1E018	24
IFF1E019	25
IFF1E021	25
IFF1E023	25
IFF1E024	25
IFF1E025	25
L-ALUM-1	191
L-BOOK-1	191
L-COMP-1	190
L-FLEX-1	190
L-FRONT-1	192
L-HEAD-1	192



	
L-MINI-1	191
L-SLIM-1	190
LT-420-1	185
MEE-1S2L-B-I	196 - 197
MEE-BANNER-I	198
MEE-COR-1L-B-I	197
MEE-COR-LIGHT-I	197
MEE-COUNT-IR-1	199
MEE-COUNT-IR-2	199
MEE-COUNT-IR-3	199
MEE-DB-W-NL	198
MEE-LIGHTBOX-I	197
MEE-SA-SS-IR	199
MEE-SIGN-CARR-I	196 - 197
MEE-TR-W-I	198
P-IW-12	193
P-IW-12C	193
P-IW-12P	193
P-IW-34	193
P700	194
P821	194
PEE-COUNT-006	199
PEE-METHACRYL-I	198
PEE-PC-IR-1	199
PEE-SIGN-DB-W-2	198
PEE-TOPSIGN-I	198
PM5002	194
PM5003	194
PM5012	194
PM5013	194
PM5142	194
PM5143	194
PM5152	194
PM5153	194
PM5248	194
PPOS-A4-STICK-I	199
T4901	135
T4902	135
T49H10	135
T49H10L	135
T49H10XL	135
T49H12	135
T49H12L	135
T49H14	135
T49H4	135
T49H4L	135
T49H5	135
T49H5L	135
T49H6	135
T49H6L	135
T49H7	135
T49H7L	135
T49H8	135
T49H8L	135
T49M10	136
T49M10L	136

	
T49M12	136
T49M12L	136
T49M14	136
T49M5	136
T49M5L	136
T49M6	136
T49M6L	136
T49M8	136
T49M8L	136
T49SQ10	136
T49SQ8	136
T49T20	135
T49T20H	136
T49T20HL	136
T49T20L	135
T49T25	135
T49T25H	136
T49T25HL	136
T49T25L	135
T49T27	135
T49T27H	136
T49T27HL	136
T49T27L	135
T49T30	135
T49T30H	136
T49T30HL	136
T49T30L	135
T49T30XL	71 -136
T49T40	135
T49T40H	136
T49T40HL	136
T49T40L	135
T49T40XL	71 -136
T49T45	135
T49T45H	136
T49T45HL	136
T49T45L	135
T49T45XL	71 -136
T49T50	135
T49T50H	136
T49T50HL	136
T49T50L	135
T49T55	135
T49T55H	136
T49T55HL	136
T49T55L	135
T49T55XL	135
T49T60	135
T49T60H	136
T49T60HL	136
T49T60L	135
T49T70HL	71 -136
T49T80HL	71 -136
WB-1000-1	142
WB-1200-1	142
WB-300-2	142

	
WB-500-1	142
WB-600-1	142
WB-625-2	142
WB-710-2	142
WB-800-1	142
ZH70610	173
ZH70611	173
ZH70612	173
ZH70613	173
ZH70614	173



HEXAGONAL FEMALE SCREWS

 mm	mm.						U.S.A.			G.B.		
	 DIN 912 DIN 6912	 DIN 7984	 DIN 7991	 DIN 913-916			USAS B 18-3-1969			BS 2470-1954		
							 d	 d	 d	 d	 d	
mm	mm	mm	mm	mm	inch	mm	inch	inch	inch	inch		
1.5	1.6-2		2.5	3	1/16"	1.59	Nº 1	Nº 3-Nº 4	Nº 5-Nº 6		5 BA	5 BA-4 BA
2	2.5	3	3	4	5/64"	1.98	Nº 2-Nº 3	Nº 5-Nº 6	Nº 8		3 BA	3 BA
2.5	3	4	3.5-4	5	3/32"	2.38	Nº 4-Nº 5	Nº 8	Nº 10		3/16-2 BA-1 BA	3/16-2 BA-1 BA
3	4	5	5	6	7/64"	2.78	Nº 6					
4	5	6	6	8	1/8"	3.17		Nº 10	1/4"			0 BA-1/4
5	6	8	8	10	9/64"	3.57	Nº 8		5/16"			
6	8	10	10	12	5/32"	3.97	Nº 10	1/4"	3/8"		3/16-2 BA-1 BA	5/16
7	10	12	12	16	3/16"	4.75	1/4"	5/16"	7/16"		1/4-0 BA	3/8-BSP 1/8
8					7/32"	5.55		3/8"			5/16"	7/16
9					1/4"	6.35	5/16"	7/16"	1/2"		3/8-7/16"	1/2-BSP 1/4
10	12	14	14-16	20	5/16"	7.94	3/8"	1/2"	5/8"		1/2"	5/8-BSP 3/8
12	14	16-18	18-20	24	3/8"	9.52	7/16-1/2"	5/8"	3/4"		3/4"	3/4-BSP 1/2
14	16-18	20-22			1/2"	12.70	5/8"		7/8"		5/8"	7/8-BSP 5/8
17	20-22	24			9/16"	14.29		3/4"	1-1 1/8"		3/4-7/8"	1-BSP 3/4
19	24-27				5/8"	15.88	3/4"	1"	1 1/4-1 3/8"		1"	
22	30				3/4"	19.05	7/8-1"	1 1/8"				

THREAD DIAMETERS AND DIAMETER/KEYS

 mm	mm.					 mm	UNIFIED			U.S.A.			G.B.	
	ISO 272 1962	UNE 17052 1978	DIN 931 1970	NFE 27111 1930	DS 2074-5 1986		BS 1769	BS 1768	BS 1768	ASAB 18-22 ASAB 18-21	ASAB 18-21	ASAB 18-22	 mm	 mm
														
						A.F.							inch	
3.2						3/32"							0.117	2.97
3.5						1/8"							0.131	3.32
													0.152	3.86
4	1.6	1.6	1.6			5/32"							0.172	4.37
4.5			2	2.5									0.193	4.90
5	2.5	2.5	2.3	3		3/16"							0.220	5.59
5.5	3	3	2.6	3.5		7/32"							0.248	6.30
6			3	4-4.5		1/4"							0.282	7.16
7	4	4	4	5		9/32"							0.324	8.23
8	5	5	5	5.5		5/16"							0.340	8.64
9						11/32"							0.365	9.27
						3/8"							0.413	10.49
10	6	6	6	6	1/4"	7/16"		1/4"	1/4"		1/4"	1/4"	0.445	11.30
11	7	7	7	7										
12														
13	8	8	8	8	5/16"	1/2"	1/4"	5/16"	5/16"	1/4"	5/16"	5/16"	0.525	13.34
14						12.70	5/16"	3/8"	3/8"	5/16"	3/8"	3/8"	0.600	15.24
15						14.29								
16	10	10	10	9	3/8"	5/8"		7/16"	7/16"		7/16"	7/16"	0.710	18.03
17				10		15.88								
18	12	12	12	11	7/16"	11/16"	3/8"	7/16"	7/16"	3/8"	7/16"	7/16"	0.820	20.83
19				12	1/2"	19.05	7/16"	1/2"	1/2"	7/16"	1/2"	1/2"	0.920	23.37
21	14	14	14	12		20.64	1/2"	9/16"	9/16"	1/2"	9/16"	9/16"	1.010	25.65
22						22.22								
23				14		15/16"		5/8"	5/8"	9/16"	5/8"	5/8"	1.100	27.94
24	16	16	16	16	5/8"	1"								
26						23.81								
27						25.40								
28	18	18	18		1 1/16"	26.99	5/8"			5/8"			1.200	30.48
29				18	1 1/8"	28.58		3/4"	3/4"		3/4"	3/4"	1.300	33.02
30	20	20	20	20	3/4"	1 3/16"							1.390	35.31
32						30.16	3/4"						1.480	37.59
34	22	22	22	20		31.75		7/8"	7/8"	3/4"	7/8"	7/8"	1.670	42.42
35				22		33.34								
36						34.92								
38	24	24	24	24	7/8"	1 7/16"	7/8"	1"	1"	7/8"	1"	1"	1.860	47.24
						36.51							2.050	52.07
41	27	27	27	27	1"	38.10	1"	1 1/8"	1 1/8"	1"	1 1/8"	1 1/8"	2.220	56.39
42						41.28							2.410	61.21
						42.86							2.580	65.53
						44.45							2.760	70.10
46	30	30	30	30	1 1/8"	1 13/16"	1 1/8"	1 1/4"	1 1/4"	1 1/8"	1 1/4"	1 1/4"	3.550	90.17
50	33	33	33	33	1 1/4"	46.04	1 1/4"			1 1/4"				
						47.62								
54				36		50.80								
55	36	36	36	36	1 3/8"	2 1/16"	1 3/8"	1 3/8"	1 3/8"	1 3/8"	1 3/8"	1 3/8"	3.890	98.81
58				39		52.39	1 3/8"	1 1/2"	1 1/2"	1 3/8"	1 1/2"	1 1/2"	4.180	106.17
						55.56								
						57.17								
60	39	39	39	42	1 1/2"	2 3/8"	1 1/2"			1 1/2"	1 5/8"	1 5/8"		
63						60.32								
65	42	42	42	42	1 5/8"	2 7/16"				1 5/8"				
						61.91								
67				45		65.09								
70	45	45	45	45	1 3/4"	2 5/8"	1 3/4"	1 3/4"	1 3/4"	1 3/4"	1 7/8"	1 7/8"	2.760	70.10
71				48		66.68								
						69.85								
						71.44								
75	48	48	48	52	1 7/8"	2 15/16"		2"	2"	1 7/8"	2"	2"	3.150	76.70
77						74.61								
80	52	52	52	56	2"	76.20	2"			2"				
						79.38								
82				60	2 1/4"	3 3/8"				2 1/4"	2 1/4"	2 1/4"		
85	56	56	56	60		85.72								
88						88.90								
90	60	60	60	64										
94														
95	64	64	64	64	2 1/2"	3 3/4"				2 1/2"	2 1/2"	2 1/2"	3.890	98.81
100				68		98.42				2 1/2"	2 3/4"	2 3/4"	4.180	106.17
105	68	68	68	72	2 3/4"	3 7/8"								
110	72	72	72	76	3"	104.78								
	76	76	76	80		107.95				2 3/4"	3"	3"	4.530	115.06
115						114.30								
116	80	80	80	80	3 1/4"	4 1/2"				3"				
120	85	85	85	80		117.48				3"			4.850	123.19



inch.		mm	inch.		mm	inch.		mm
inch.		mm	inch.		mm	inch.		mm
.	0.0039	0.1000	.	0.5512	14.0000	.	1.8898	48.0000
.	0.0079	0.2000	9/16"	0.5625	14.2875	.	1.9291	49.0000
.	0.0118	0.3000	.	0.5709	14.5000	.	1.9685	50.0000
1/64"	0.0156	0.3969	37/64"	0.5781	14.6844	2"	2.0000	50.8000
.	0.0157	0.4000	.	0.5906	15.0000	.	2.0079	51.0000
.	0.0197	0.5000	19/32"	0.5938	15.0813	.	2.0472	52.0000
.	0.0236	0.6000	39/64"	0.6094	15.4781	.	2.0866	53.0000
.	0.0276	0.7000	.	0.6102	15.5000	.	2.1260	54.0000
1/32"	0.0313	0.7938	5/8"	0.6250	15.8750	.	2.1654	55.0000
.	0.0315	0.8000	.	0.6299	16.0000	.	2.2047	56.0000
.	0.0354	0.9000	41/64"	0.6406	16.2719	.	2.2441	57.0000
.	0.0394	1.0000	.	0.6496	16.5000	2 1/4"	2.2500	57.1500
.	0.0433	1.1000	21/32"	0.6563	16.6688	.	2.2835	58.0000
3/64"	0.0469	1.1906	.	0.6693	17.0000	.	2.3228	59.0000
.	0.0472	1.2000	43/64"	0.6719	17.0656	.	2.3622	60.0000
.	0.0512	1.3000	11/16"	0.6875	17.4625	.	2.4016	61.0000
.	0.0551	1.4000	.	0.6890	17.5000	.	2.4409	62.0000
.	0.0591	1.5000	45/64"	0.7031	17.8594	.	2.4803	63.0000
1/16"	0.0625	1.5875	.	0.7087	18.0000	2 1/2"	2.5000	63.5000
.	0.0630	1.6000	23/32"	0.7188	18.2563	.	2.5197	64.0000
.	0.0669	1.7000	.	0.7283	18.5000	.	2.5591	65.0000
.	0.0709	1.8000	47/64"	0.7344	18.6531	.	2.5984	66.0000
.	0.0748	1.9000	.	0.7480	19.0000	.	2.6378	67.0000
5/64"	0.0781	1.9844	3/4"	0.7500	19.0500	.	2.6772	68.0000
.	0.0787	2.0000	49/64"	0.7656	19.4469	.	2.7165	69.0000
.	0.0827	2.1000	.	0.7677	19.5000	2 3/4"	2.7500	69.8500
.	0.0866	2.2000	25/32"	0.7813	19.8438	.	2.7559	70.0000
.	0.0906	2.3000	.	0.7874	20.0000	.	2.7953	71.0000
3/32"	0.0938	2.3813	51/64"	0.7969	20.2406	.	2.8346	72.0000
.	0.0945	2.4000	.	0.8071	20.5000	.	2.8740	73.0000
.	0.0984	2.5000	13/16"	0.8125	20.6375	.	2.9134	74.0000
7/64"	0.1094	2.7781	.	0.8268	21.0000	.	2.9528	75.0000
.	0.1181	3.0000	53/64"	0.8281	21.0344	.	2.9921	76.0000
1/8"	0.1250	3.1750	27/32"	0.8438	21.4313	3"	3.0000	76.2000
.	0.1378	3.5000	.	0.8465	21.5000	.	3.0315	77.0000
9/64"	0.1406	3.5719	55/64"	0.8594	21.8281	.	3.0709	78.0000
5/32"	0.1563	3.9688	.	0.8661	22.0000	.	3.1102	79.0000
.	0.1575	4.0000	7/8"	0.8750	22.2250	.	3.1496	80.0000
11/64"	0.1719	4.3656	.	0.8858	22.5000	.	3.1890	81.0000
.	0.1772	4.5000	57/64"	0.8906	22.6219	.	3.2283	82.0000
3/16"	0.1875	4.7625	.	0.9055	23.0000	.	3.2677	83.0000
.	0.1969	5.0000	29/32"	0.9063	23.0188	.	3.3071	84.0000
13/64"	0.2031	5.1594	59/64"	0.9219	23.4156	.	3.3465	85.0000
.	0.2165	5.5000	.	0.9252	23.5000	.	3.3858	86.0000
7/32"	0.2188	5.5563	15/16"	0.9375	23.8125	.	3.4252	87.0000
15/64"	0.2344	5.9531	.	0.9449	24.0000	.	3.4646	88.0000
.	0.2362	6.0000	61/64"	0.9531	24.2094	3 1/2"	3.5000	88.9000
1/4"	0.2500	6.3500	.	0.9646	24.5000	.	3.5039	89.0000
.	0.2559	6.5000	31/32"	0.9688	24.6063	.	3.5433	90.0000
17/64"	0.2656	6.7469	.	0.9843	25.0000	.	3.5827	91.0000
.	0.2756	7.0000	63/64"	0.9844	25.0031	.	3.6220	92.0000
9/32"	0.2813	7.1438	1"	1.0000	25.4000	.	3.6614	93.0000
.	0.2953	7.5000	.	1.0039	25.5000	.	3.7008	94.0000
19/64"	0.2969	7.5406	.	1.0236	26.0000	.	3.7402	95.0000
5/16"	0.3125	7.9375	.	1.0433	26.5000	.	3.7795	96.0000
.	0.3150	8.0000	.	1.0630	27.0000	.	3.8189	97.0000
21/64"	0.3281	8.3344	.	1.0827	27.5000	.	3.8583	98.0000
.	0.3346	8.5000	.	1.1024	28.0000	.	3.8976	99.0000
11/32"	0.3438	8.7313	.	1.1220	28.5000	.	3.9370	100.0000
.	0.3543	9.0000	.	1.1417	29.0000	4"	4.0000	101.6000
23/64"	0.3594	9.1281	.	1.1614	29.5000	.	4.3307	110.0000
.	0.3740	9.5000	.	1.1811	30.0000	4 1/2"	4.5000	114.3000
3/8"	0.3750	9.5250	.	1.2205	31.0000	.	4.7244	120.0000
25/64"	0.3906	9.9219	1 1/4"	1.2500	31.7500	5"	5.0000	127.0000
.	0.3937	10.0000	.	1.2598	32.0000	.	5.1181	130.0000
13/32"	0.4063	10.3188	.	1.2992	33.0000	.	5.5118	140.0000
.	0.4134	10.5000	.	1.3386	34.0000	.	5.9055	150.0000
27/64"	0.4219	10.7156	.	1.3780	35.0000	6"	6.0000	152.4000
.	0.4331	11.0000	.	1.4173	36.0000	.	6.2992	160.0000
7/16"	0.4375	11.1125	.	1.4567	37.0000	.	6.6929	170.0000
.	0.4528	11.5000	.	1.4961	38.0000	.	7.0866	180.0000
29/64"	0.4531	11.5094	1 1/2"	1.5000	38.1000	.	7.4803	190.0000
15/32"	0.4688	11.9063	.	1.5354	39.0000	.	7.8740	200.0000
.	0.4724	12.0000	.	1.5748	40.0000	8"	8.0000	203.2000
31/64"	0.4844	12.3031	.	1.6142	41.0000	.	9.8425	250.0000
.	0.4921	12.5000	.	1.6535	42.0000	10"	10.0000	254.0000
1/2"	0.5000	12.7000	.	1.6929	43.0000	20"	20.0000	508.0000
.	0.5118	13.0000	.	1.7323	44.0000	30"	30.0000	762.0000
33/64"	0.5156	13.0969	1 3/4"	1.7500	44.4500	40"	40.0000	1016.0000
17/32"	0.5313	13.4938	.	1.7717	45.0000	60"	60.0000	1524.0000
.	0.5315	13.5000	.	1.8110	46.0000	80"	80.0000	2032.0000
35/64"	0.5469	13.8906	.	1.8504	47.0000	100"	100.0000	2540.0000



What is a standard?

A standard is a document that provides requirements, specifications, guidelines or characteristics that can be used consistently to ensure that materials, products, processes and services are fit for their purpose.

What are the benefits of ISO International Standards?

ISO International Standards ensure that products and services are safe, reliable and of good quality. For business, they are strategic tools that reduce costs by minimizing waste and errors, and increasing productivity. They help companies to access new markets, level the playing field for developing countries and facilitate free and fair global trade.

IRIMO main product families

Socket wrenches

- ISO 2725, hand sockets, general dimensions; ISO 1174, driving squares. The standards define the limits to certain dimensions to avoid the play between the socket and the bolt, the accessibility to reach, and guarantee the correct torque transmission and to work with nuts and studs.
- ISO 1711, hand and impact sockets, define the minimum hardness that a socket should have, and the minimum torque that a socket should resist.
This assures that only the right material has been used, and the socket will be able to be used without breakage risk.
- The profile of the sockets, hex and biex, was designed for a much better distribution of the strength far from the corners to avoid possible breakings.
At the same time the transmission of the torque to the bolts and nuts is made out of the edges, protecting the life of the components.

Adjustable Wrenches

- Stands ISO 6787 standard torque values plus 30% without opening and deformation.
- General dimensions of adjustable wrenches according to ISO 6787 standard.
- Design forged in one piece.

Spanners-Wrenches

- Stands ISO 1711-1 standard torque values plus 30% without opening and deformation.
- Higher hardness according to ISO 1711-1, without fragility risk.
- Wrench end fitting tolerance according to ISO 691 gives higher performance and better transmission of the torque to the bolts and nuts.

Pliers

- ISO standards on pliers define, for each product family, the basic dimensions of the product. In addition to this, when applicable ISO standards also define:
 - Maximum acceptable deformations after a load test.
 - Maximum acceptable deformations after a torsion test.
 - Maximum acceptable cutting force tests.
- The most important ISO standards for pliers are:
 - ISO 5745 Pliers for gripping and manipulating – Dimensions and test values.
 - ISO 5746 Engineer's and "Lineman's" pliers – Dimensions and test values.
 - ISO 5749 Diagonal cutting nippers – Dimensions and test values.
 - ISO 8976 Multiple slip joint pliers – Dimensions and test values.
 - ISO 9242 Construction worker's pincers – Dimensions and test values.
 - ISO 9243 Pliers and nippers – Carpenter's pincers – Dimensions and test values.

Torque wrenches

ISO 6789 classifies the torque wrenches into different types (I, II) and classes (A, B, C, D, E, F).

The ISO standard assigns different accuracy levels (4% or 6%) depending on the type, class and max torque of each wrench.

This accuracy needs to be accomplished between 20% and 100% of the maximum torque of the wrench.

The standard also establishes the calibration procedure, conditions and frequency as well as other tests and product requirements.

IRIMO torque tools comply with ISO 6789 standard and SNA Europe offers calibration services in his internal After Sales Centers.

Screwdrivers

ISO standards on screwdrivers define the tip dimension, the minimum hardness and the minimum torque that they should resist.

After torque testing with the minimum value, screwdrivers shall not show any deformation on injuries at the tip:

- ISO 2380 Slotted screwdrivers – Dimensions, hardness and minimum torque values.
- ISO 8764 Phillips and Pozidriv screwdrivers – Dimensions, hardness and minimum torque values.
- ISO 2936 Hexagon screwdrivers – Dimensions, hardness and minimum torque values.

However, the IRIMO screwdrivers must meet Internal Standards that are above the ISO standard.

Internal torque values standards is 20% over the ISO standard for Slotted screwdrivers and 50% in Phillips and Pozidriv screwdrivers.

The combination of the raw material and hardness determines the performance of the blade, longer life and quality work Internal hardness; Minimum SNA Europe 58-59 HRc. Minimum ISO standards 54 HRc.

TORX® drivers; torque values are evaluated with testing gauges of Acument Global Technologies Inc., licensor of TORX®.



SNA Europe is committed to providing its customers with products that are fully compliant with all regulations, international protocols and customer standards to which they are subject. In this respect, SNA Europe complies with appropriate international regulations and directives, including REACH, RoSH, WEEE, **CE**, Conflict Minerals, etc.

Regarding REACH European regulation N° 1907/2006, it requires suppliers of any product to inform the customer of the presence of substances of very high concern (SVHC) (<http://www.echa.europa.eu/candidate-list-table>) listed in the relevant and official list above a concentration of 0.1% weight by weight (w/w). The ECHA, European Chemicals Agency, recently added several chemical substances to the list and as of December, 2014 there are 161 substances in the Candidate List of SVHC.

The compliance in REACH prevents the user from probable serious effects to human health (and/or) the environment, including carcinogenic, toxic and mutagenic categories.

The definition and aim of the RoHS directive is quite simple. The RoHS directive aims to restrict certain dangerous substances commonly used in electronic and electronic equipment. Any RoHS compliant component is tested for the presence of Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent chromium (Hex-Cr), Polybrominated biphenyls (PBB), and Polybrominated diphenyl ethers (PBDE).

The Waste Electrical and Electronic Equipment Directive (WEEE Directive) is the European Community directive 2012/19/EU on waste electrical and electronic equipment (WEEE) which, together with the RoHS Directive 2002/95/EC, became European Law in February 2003. The WEEE Directive set collection, recycling and recovery targets for all types of electrical goods, with a minimum rate of 4 kilograms per head of population per annum recovered for recycling by 2009.

The **CE** marking is the manufacturer's declaration that the product meets the requirements of the applicable EU directives.

The term Conflict Minerals refers to raw materials that come from a particular part of the world where conflict is occurring and affects the mining and trading of those materials. These are defined as columbite-tantalite, also known as coltan (from which tantalum is derived); cassiterite (tin); gold; wolframite (tungsten); or their derivatives; to be financing conflict in the Democratic Republic of the Congo or an adjoining country.

SNA Europe

For warranty info
please check your local website
www.irimo.com



Argentina

SNAE Argentina SRL

A.M. de Justo 1750 3° A
C1107AFJ - Capital Federal
Buenos Aires
Tel: +54 (11) 4313-1004
Fax: +54 (11) 4893-3553

Australia

SNAE Australia

3 Cooper Street, Smithfield,
NSW 2164
Tel: +61 (0) 2 8787 5700
Fax: +61 (0) 2 9756 6130

Belgium

Branch of SNA Europe (Benelux) BV

De Kleetlaan 12A Pegasus Park
1831 DIEGEM
Tel: +32 (0) 2 726 03 03
info.be@bahco.com

Chile

Comercial SNAE Chile LTDA

Av. Americo Vespucio 2760-D
Conchali - Santiago - Chile
Tel: + 56 2 623 0203
Fax: + 56 2 623 5395

Česká republika

SNA Europe s.r.o.

Holadnáská 2/4
639 00 Brno
Tel: +420 537 022 520
Fax: +420 537 022 200

Danmark

SNA Europe [Denmark] A/S

Vallensbækvej 40,
2605 Brøndby
Tel: +45 4363 0330
Fax: +45 4396 2456

Deutschland

SNA Europe [Germany]

Willettstraße 10
40822 Mettmann
Tel: +49 (0) 2104 833 83 0
Fax: +49 (0) 2104 833 83 7999

España

SNA Europe [Industries] Iberia SA

c/ Hilanderas, 1
(P.O. Box / Apdo de Correos nº 5)
C.P. 20303 Irún
Tel: +34 902 235 100 / +34 943 649 111
Fax: +34 943 649 120

Ελλάδα

SNA Europe

Λ. Βουλιαγμένης 604Γ
167 77 Ελληνικό, Αθήνα
Τηλ: +30 210 9914263
Info.gr@snaeurope.com

Export

SNA Europe

Antigua Carretera de Altube Km 5,5
P.O.Box 307
01080 VITORIA (Spain)
Tel: +34 945269711
Fax: +34 945165040

France

SNA EUROPE (France)

41 Boulevard Pierre de Coubertin
49 000 ANGERS
Tél: +33 (0) 2 41 22 98 40
Fax: +33 (0) 2 41 22 98 50

Italia

SNA EUROPE Italia S.p.A.

Via Georges Bizet, 13/15
20092 Cinisello Balsamo MI - Italia
Tel: +39 02 3024161
info.it@snaeurope.com

Казахстан

050000, Алматы,
ул.Шевченко 1656/72г, оф.217
Тел/факс +7 727323 63 39

México

54080, Av. Gustavo Baz Prada 180F,
San Jerónimo Tepetlacalco,
54030 Tlalnepantla de Baz, México
Tel: +52 55 5010 3000
Correo: contactanos@snapon.com

Nederland

SNA Europe [Benelux] BV

Vossenbeemd 113
5705 CL Helmond
Tel: +31 (0) 492 58 23 82
info.nl@bahco.com

New Zealand

SNAE New Zealand

Unit 3/25 Highbrook Drive
East Tamaki
Auckland
Tel: +64 9-273 46 50
Fax: +64-9-273-2453

Norge

SNA Europe [Norway]

Box 800
1306 Sandvika
Tel: +47 40 49 66 00
Fax: +47 67 17 56 51

Österreich

SNA Europe

Vienna, Nineteen, Mooslackengasse 17
A - 1190 Wien
Tel: +49 (0) 2104 8 33 83 0
Fax: +49 (0) 2104 833 83 79 99

Polska

SNA Europe - Poland Sp. z o. o.

ul. Marynarska 15
02-674 Warszawa
Tel.: +48 (0) 22 6070510
Fax: +48 (0) 22 6070521

Portugal

SNA Europe [Industries] LDA

R. Maria Julia M. Ramos - Junqueira
4480-254 Vila Do Conde
Tel: +351 252 650 131
Fax: +351 252 650 160

Slovenská republika

SNA Europe s.r.o.

Karadžičova 8/A
821 08 Bratislava
Tel: +421 (0) 2 5939 6124
Fax: +421 (0) 2 5939 6217

SRBIJA

Vermax-alati doo

Ul. Drage Spasić 35
11000 Beograd
Tel: +381 11 2360 500
Tel: +381 11 2360 900
Fax: +381 11 2361 147
e-mail: office@vermax.rs

Suomi

SNA Europe Oy

PL 6580
00002 Helsinki
Finland
Tel: +358 207 433 510
Fax: +358 207 433 525

Sverige

SNA Europe Industries AB

Box 83
SE-745 22 Enköping
Tel: +46 (0) 171-47 82 00
Fax: +46 (0) 171-47 82 38

Schweiz / Suisse

SNA Europe

Willettstraße 10
40822 Mettmann
Tel: +49 (0) 2104 833 83 0
Fax: +49 (0) 2104 833 83 7999

Türkiye

SNA E Endüstriyel Mam. San. Tic. Ltd. Şti.

Girne Mah. Maltepe Küçük San. Sitesi
F Blok No:19 Maltepe
İstanbul
Tel: +90 (0) 216 367 10 21
Fax: +90 (0) 216 367 11 71

Украина

«Бахко Бисов Свенска Акциеболаг»

SNA Europe [Ukraine & Moldova]
Телефон +38 067 441 16 09
офис 555, улица Армянская, 6А
Киев, Украина

United Kingdom

SNA Europe [UK]

Moorhead Way, Bramley,
Rotherham, South Yorkshire S66 1YY
Tel: +44 (0) 1709 731731
Fax: +44 (0) 1709 731741

[illegible]

[illegible]

[illegible]

[illegible]



Since 1930



SNA Europe

IRIMO-ENG-26NP



www.irimo.com